U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

				FOR INSUF	RANCE COMPANY USE		
A1. Building Owner's Maryann Slaughter &		Morrow				Policy Num	ber:
A2. Building Street A Box No. 210 North Kenyon Av		luding Apt., Unit, Suite	, and/o	r Bldg. No.) or P.O.	Route and	Company N	IAIC Number:
City CITY OF MARG	ATE			State New Jersey	•	ZIP Code 08402	
A3. Property Descrip Block 413.02 Lot 17	otion (Lot ar	nd Block Numbers, Tax	Parce	l Number, Legal De	scription, etc.)		
A4. Building Use (e.	g., Resident	ial, Non-Residential, A	ddition	, Accessory, etc.)	RESIDENTIAL		
A5. Latitude/Longitud	de: Lat. <u>39</u>	.3309 L	ong7	74.5077	Horizontal Datum	n: NAD 1	927 X NAD 1983
A6. Attach at least 2	photograph	s of the building if the	Certific	ate is being used to	o obtain flood insura	ance.	
A7. Building Diagram	n Number	7					A
A8. For a building wi	th a crawlsp	pace or enclosure(s):					
a) Square footag	ge of crawls	pace or enclosure(s)		1,480 sq ft			
b) Number of pe	ermanent flo	od openings in the cra	wlspac	e or enclosure(s) w	ithin 1.0 foot above	adjacent gra	ade8
c) Total net area	a of flood op	enings in A8.b1,60	00s	q in			,
d) Engineered flo	ood opening	gs? 🗵 Yes 🗌 No					
A9. For a building wit	th an attach	ed garage:					
a) Square footage of attached garage 0 sq ft							
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 0							
c) Total net area of flood openings in A9.b 0 sq in							
		NOTIFIED SACRETOR		. 34 111			
d) Engineered flood openings?							
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION							
B1. NFIP Community CITY OF MARGATE				B2. County Name ATLANTIC COUN	TY		B3. State New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Ef	IRM Panel fective/ evised Date	B8. Flood Zone(s)	(Zor	e Flood Elevation(s) ne AO, use Base nd Depth)
345304/0001	С	10/18/1983		/1983	A8**	10**	и Берит)
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
B11. Indicate elevation datum used for BFE in Item B9: X NGVD 1929 NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No							
Designation Date: CBRS OPA							
				957000			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

			FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or 210 North Kenyon Avenue	Bldg. No.) or P.O. Rou	te and Box No.	Policy Number:	
City Stat CITY OF MARGATE New	e ZIP v Jersey 0840	Code)2	Company NAIC Number	
SECTION C – BUILDING ELI	EVATION INFORMAT	TON (SURVEY RE	EQUIRED)	
C1. Building elevations are based on: Constructio *A new Elevation Certificate will be required when co		ding Under Constru	ction* X Finished Construction	
C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), Complete Items C2.a–h below according to the build Benchmark Utilized: private	VE, V1–V30, V (with Bi ling diagram specified i Vertical Datum:	n Item A7. In Puerto	AE, AR/A1–A30, AR/AH, AR/AO. o Rico only, enter meters.	
Indicate elevation datum used for the elevations in ite		w.		
Datum used for building elevations must be the same	The state of the s	FE.	Check the measurement used.	
a) Top of bottom floor (including basement, crawlsp.	ace, or enclosure floor)	6. 7	X feet meters	
b) Top of the next higher floor		<u>16</u> . 3	X feet meters	
c) Bottom of the lowest horizontal structural membe	r (V Zones only)	N/A	X feet meters	
d) Attached garage (top of slab)		N/A	x feet meters	
 e) Lowest elevation of machinery or equipment serv (Describe type of equipment and location in Com- 		12. 1	X feet meters	
f) Lowest adjacent (finished) grade next to building	(LAG)	<u>6</u> . <u>3</u>	X feet meters	
g) Highest adjacent (finished) grade next to building	(HAG)	<u> </u>	X feet meters	
 h) Lowest adjacent grade at lowest elevation of decistructural support 	k or stairs, including	<u> </u>	X feet meters	
SECTION D – SURVEYOR,	ENGINEER, OR ARC	HITECT CERTIFI	CATION	
This certification is to be signed and sealed by a land sur I certify that the information on this Certificate represents statement may be punishable by fine or imprisonment und	my best efforts to inter-	pret the data availa	law to certify elevation information. ble. I understand that any false	
Were latitude and longitude in Section A provided by a lic			★ Check here if attachments.	
Certifier's Name Paul M. Koelling, PLS, CFM	License Number NJ24GS 04328800			
Title Licensed Land Surveyor				
Company Name			Place	
Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28	3256300		Seal Here	
Address 2161 Shore Road			Hele	
City	State New Jersey	ZIP Code 08221		
Signature	Date 9-/1-/7	Telephone (609) 927-0279	7.	
Copy of pages of this Elevation Certificate and all attachmen		icial, (2) insurance a	gent/company, and (3) building owner.	
Comments (including type of equipment and location, per *A8b.) Smart Vents Model #1540-510 engineered for 200 **B8 & B9.) FEMA Pre-FIRM Zone "AE"Base Flood Ele***C2a.) enclosure (1,361 s.f.) foyer (119 s.f.) ****C2e.) exterior air unit (elev 16.6)ductwork (elev 14. elevator pit (elev 5.9)electrical outlets (elev	square inches of net an evation 8 ft. (NAVD88) 0)furnace(elev 14	converted = 9.3 ft. (
	5			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

MPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COM			
Bldg. No.) or P.O. Route and Bo	x No. Policy Number:		
ZIP Code Jersey 08402	Company NAIC Number		
TION INFORMATION (SURV DAND ZONE A (WITHOUT BI			
al grade, if available. Check the ck the appropriate boxes to show cent grade (LAG). feet feet grade in Section A Items feet feet feet feet feet feet feet fee	support a LOMA or LOMR-F request, measurement used. In Puerto Rico only, we whether the elevation is above or below meters above or below the HAG. meters above or below the LAG. and/or 9 (see pages 1–2 of Instructions), meters above or below the HAG. ted in accordance with the community's ited in accordance with the community ited in accordance with		
nme			
City	State ZIP Code		
10000	Telephone		
	ZIP Code Jersey 08402 TION INFORMATION (SURV O AND ZONE A (WITHOUT BI If the Certificate is intended to al grade, if available. Check the ck the appropriate boxes to show ent grade (LAG). feet grade (LAG). feet feet grade (LAG). feet feet Grade (LAG). feet Grade (LAG).		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, Suite, and/ 210 North Kenyon Avenue					
City Si CITY OF MARGATE N	Company NAIC Number				
SECTION G - COMMUNITY INFORMATION (OPTIONAL)					
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.					
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)					
G2. A community official completed Section E for or Zone AO.					
G3. The following information (Items G4–G10) is p	provided for community floodplain mar				
G4. Permit Number G5. Da	te Permit Issued	G6. Date Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for: New Construction Substantial Improvement					
G8. Elevation of as-built lowest floor (including baseme of the building:	ent)	feet meters Datum			
G9. BFE or (in Zone AO) depth of flooding at the buildi	ng site:	feet meters Datum			
G10. Community's design flood elevation:		feet meters Datum			
Local Official's Name JIM GALANTINO	Title CFM	a.			
Community Name CITY OF MARGATE	Telephone 609-822-19	74			
Signature () - ()	Date 5/3/1)				
Comments (including type of equipment and location, per C2(e), if applicable)					
•					
2					
		Check here if attachments.			

Building Photographs

	See Instructions for Ite	m A6.	For Insurance Company Use:
Building Street Address (inclu 210 North Kenyon Av	uding Apt., Unit, Suite, and/or Bldg.) No. or P.C venue	D. Route and Box No.	Policy Number
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08204	2 1 450 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least two building photographs below according to the instructions for Item A6. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." If submitting more photographs than will fit on this page, use the Continuation Page on the reverse.





Front View – Date of Photograph: (See Photo Stamp)


Rear View - Date of Photograph: (See Photo Stamp)





Right Side View – Date of Photograph: (See Photo Stamp)

Left Side View – Date of Photograph: (See Photo Stamp)

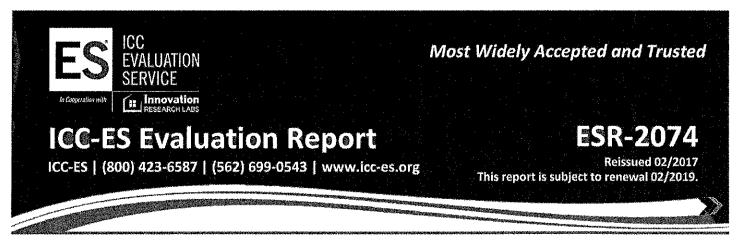

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent[®] Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT[®] Stacking Model #1540-511 and FloodVENT[®] Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be



installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent[®] FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT [®]	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200	
FloodVENT [®] Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200	
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200	
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200	
SmartVENT [®] Stacker	1540-511	16" X 16"	400	
FloodVent [®] Stacker	1540-521	16" X 16"	400	

For SI: 1 inch = 25.4 mm; 1 square foot = m²

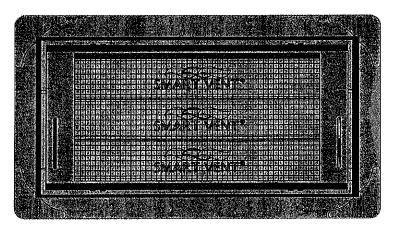


FIGURE 1—SMART VENT: MODEL 1540-510

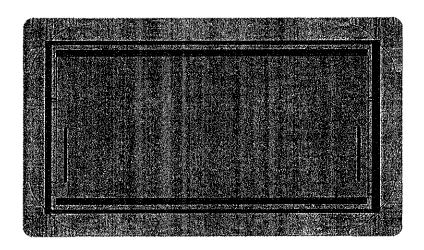


FIGURE 2-SMART VENT MODEL 1540-520

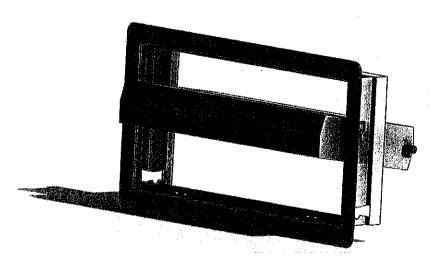


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN