## DEPARTMENT OF HOMELAND SECURITY

# Federal Emergency Management Agency ELEVATION CERTIFICATE

**IMPORTANT: FOLLOW THE INSTRUCTIONS ON PAGES 9-16** 

OMB Control Number: 1660-0008 Expiration: 11/30/2018

Copy all pages of this Elevation Certificate and all attachments for (1) community	y official, (2) insura	nce agent/compa	ny, and (3) buil			
A1. Building Owner's Name			Policy Number:			
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or Box No.	P.O. Route and	Company NAIC				
23 SOUTH ADAMS AVENUE		Number:				
City MARGATE	State NJ		Zip Code	08402		
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legs BLOCK 127 LOT 201	al Description, etc	.)				
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, e	tc.) RESIDENTIAL	-				
A5. Latitude/Longitude: Lat. 30 19'16.28" Long. 74 30'52.22" Hor	rizontal Datum:	C NAD 1927	● NAD 198	3		
A6. Attach at least 2 photographs of the building if the Certificate is being us	sed to obtain flood	insurance.				
A7. Building Diagram Number 7						
A8. For a building with a crawlspace or enclosure(s):	A9. For a buildi	ng with an attach	ed garage:			
a) Square footage of crawlspace or enclosure(s) 1907. sq ft	a) Square foota	ge of attached ga	arage	sq ff		
b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade	C 351	ermanent flood op ed garage within r ent grade	200			
c) Total net area of flood openings in A8.b 2000. sq in	c) Total net area	a of flood opening	gs in A9.b	sq ir		
d) Engineered flood openings? C Yes No	d) Engineered f	lood openings?	○Yes	● No		
SECTION B - FLOOD INSURANCE RAT	E MAP (FIRM) IN	FORMATION				
B1. NFIP Community Name & Community Number B2. Cour MARGATE 345304 B2. Cour				B3. State NJ		
B4, Map/Panel Number 345304/0001         B5. Suffix C         B6. FIRM Index Date Revised D         B7. FIRM Par Revised D           Jul 1, 2014         Oct 28, 1983	nel Effective/ B8. Date A-8	Flood Zone(s)		od Elevation(s) , use base flood		
FIS Profile FIRM Community Determined Other/Source:  B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 C  B12. Is the building located in a Coastal Barrier Resources System (CBRS) a  Designation Date: CBRS OPA		5,000	DPA)? CY¢	es • No		
SECTION C - BUILDING ELEVATION INFO	RMATION (SURV	EV REQUIRED)				
C1. Building elevations are based on: Construction Drawings* © Buil C2. Elevations - Zones A1 - A30, AE, AH, A (with BFE), VE, V1 - V30, V (witt Complete Items C2.a -h below according to the building diagram specified in 'A new Elevation Certificate will be required when construction of the building	lding Under Const h BFE), AR, AR/A Item A7. In Puerto	ruction* CI , AR/AE, AR/A1 - Rico only, enter				
ndicate elevation datum used for the elevations in items a) through h) below.	● NGVD 1929	○ NAVD 1988				
Other/Source:						
Datum used for building elevations must be the same as that used for the BFF	E.		Check the me	asurement used,		
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	7	67	(e feet	C meters		
o) Top of the next higher floor	14 -	73	• feet	C meters		
c) Bottom of the lowest horizontal structural member (V Zones only)	<u>N/A</u> -		• feet	<u>C</u> meters		
d) Attached garage (top of slab)	N/A -	-	• feet	C meters		
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)			• feet	<u>O</u> meters		
) Lowest adjacent (finished) grade next to building (LAG)	6 -	77	• feet	O meters		
Highest adjacent (finished) grade next to building (HAG)	7	52	• feet	C meters		
o, anjare (						
f) Lowest adjacent (finished) grade next to building (LAG)     g) Highest adjacent (finished) grade next to building (HAG)	5 -					

## **ELEVATION CERTIFICATE**

OMB Control Number: 1660-0008 Expiration: 11/30/2018

23 SOUTH ADAMS AVENUE

MARGATE

NJ

08402

	SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION							
	This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify							
	that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be							
	unishable by fine or imprisonment under 18 U.S. Code, Section 1001.							
		Were latitude and						
	Check here if attachments.	provided by a lice		rveyor?				
		⊚Yes C	No		j			
	Certifier's Name		License Num	nber				
	DANIEL J. PONZIO, SR.		GS37603		DI ACE			
	Title	Company Name	1710 00 0 4	DOG ING	PLACE SEAL			
	LAND SURVEYOR	ARTHUR W. PON	NZIO CO. & A	.550C.INC	HERE			
	Address	City	State	Zip Code				
	400 N. DOVER AVENUE	ATLANTIC CITY	NJ	08401				
,	Signature //	Date	Teleph	one				
/	N / 2////	JUNE 21, 2016	+1 (6	09) 344-8194				
	14/11				SS 9 S SSSS			
Ì	Copy both sides of this Elevation Certificate for (		20 85 16	nce agent/compa	any, and (3) building owner.			
	Comments (including type of equipment and loc	cation, per C2(e), if	applicable)"					
		١			<u> </u>			
	PROJECT # 32975	NTS MODEL 1540	-510		<u> </u>			
		1						
		/						
		/						
		/						
		\ /						
/	1 2/1/1/1/	1 /						
(	Signature MV				Date JUNE 21, 2016			
	SECTION E - BUILDING ELEVATION INF	ORMATION (SUR)	VEY NOT RE	QUIRED) FOR Z				
	For Zones Ag and A without BFE), complete Ite	ems E1 -E5, If the	Certificate is in	ntended to suppo	ort a LOMA or LOMR-F request, complete			
	Sections A, B,and C. For Items E1 -E4, use natu	ıral grade, if availal	ble. Check the	e measurement u	used. In Puerto Rico only, enter meters.			
	Es Buille III in the state of the fallowing		anconciato hay	voo to ahou what	ther the elevation is above or helew the			
	E1. Provide elevation information for the followin			tes to show whet	THE THE EIEVATION IS ADOVE OF DELOW THE			
	highest adjacent grade (HAG) and the lowest adjacent grade (LAG).							
	<ul> <li>a) Top of bottom floor (including basement,</li> </ul>	crawlspace,	_	C feet C n	neters above or below the HAG.			
	or enclosure) is							
	b) Top of bottom floor (including basement,	crawlspace,	020	Citati Can	eters above or below the LAG.			
	or enclosure) is	(		_ Cfeet Cm	leters			
	E2. For Building Diagrams 6 -9 with permanent flood openings provided in Section A Items 8 and/or 9 (see pages 8 -9 of Instructions), the next							
	higher floor (elevation C2.b in the diagrams) of the building is Geet Gmeters above or below the HAG.							
	E3. Attached garage (top of slab) is			_ C feet C m	eters above or below the HAG.			
	E4. Top of platform of machinery and /or equipm	nent		C == 1 C	otoro D			
	servicing the building is	la company		C feet C m	eters above or below the HAG.			
	E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain							
	management ordinance? Cyes CNo CUnknown. The local official must certify this information in Section G.							
	SECTION F - PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION							
	The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or							
	The property owner or owner's authorized repres community-issued BFE) or Zone AO must sign h	sentative who comp nere. The statemen	ts in Sections	A, B, and E are	correct to the best of my knowledge.			
	Property Owner or Owner's Authorized Represe	-1-30 - 0493			•			
	1			01-1-	ZID Codo			
	Address	City		State	ZIP Code			
	Signatura	Date .	-//.	/ Telephone	1			
	Signature	Date )	14/1	refeblione	•			
	Comments	,	11					
			0.70					
- 1					Check here if attachments.			

OMB Control Number: 1660-0008 Expiration: 11/30/2018

SECTION G - COMN	IUNITY INFORMA	TION (O	PTIONAL)			
The local official who is authorized by law or ordinance to admin A, B, C (or E), and G of this Elevation Certificate. Complete the G10. In Puerto Rico only, enter meters.	nister the communit applicable item(s) a	y's flood and sign	plain manag below. Che	pement ordinanc	e can comp nent used i	olete Section n Items G8 -
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)						
G2. A community official completed Section E for a building AO.	g located in Zone A	(withou	t a FEMA-is	sued or commur	nity-issued I	BFE) or Zone
G3. The following information (Items G4 -G10) is provided	for community flood	dplain m	anagement	purposes.		
G4. Permit Number G5. Date Perr	nit Issued	G6. Dat	e Certificate	of Compliance/	Occupancy	Issued
G7. This permit has been issued for: ( New Construction (	Substantial Improv	rement				
G8. Elevation of as-built lowest floor (including basement) of the building:		C feet	○ meters	Datum		
G9. BFE or (in Zone AO) depth of flooding at the building site:		⊜ feet	C meters	Datum		
G10. Community's design flood elevation:		⊜ feet	○ meters	Datum	*****	
Local Official's Name	Title		-			
Community Name	Telephone					
Signature	Date					
Comments			7 2			
						8
						174
						9
						n
						8
						63

#### **BUILDING PHOTOGRAPHS**

See instructions for Item A6


OMB Control Number: 1660-0008 Expiration: 11/30/2018


IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 23 SOUTH ADAMS AVENUE Zip Code Company NAIC Number: State NJ MARGATE 08402 If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front view" and Rear view"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

SEE ATTACHED PHOTOS

## PHOTOS TAKEN ON 6/20/16 23 SOUTH ADAMS AVENUE, MARGATE, N.J.



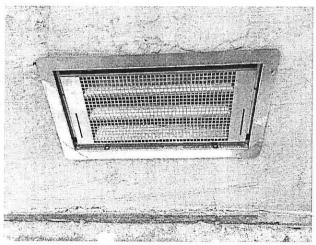

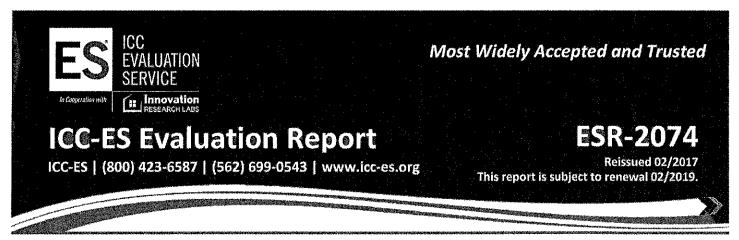

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

#### REPORT HOLDER:

## SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514




Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





## **ICC-ES Evaluation Report**

## **ESR-2074**

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

## 4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be



installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 5.0 CONDITIONS OF USE

The Smart Vent<sup>®</sup> FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

## 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

## 7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>

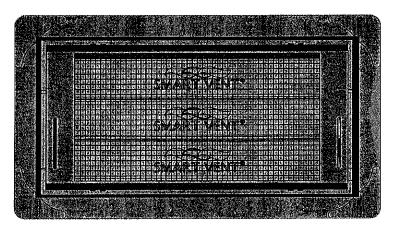


FIGURE 1—SMART VENT: MODEL 1540-510

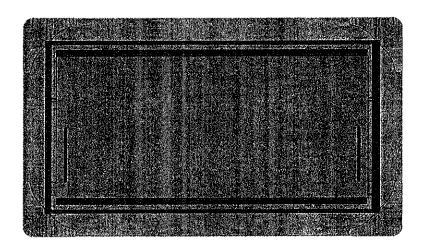


FIGURE 2-SMART VENT MODEL 1540-520

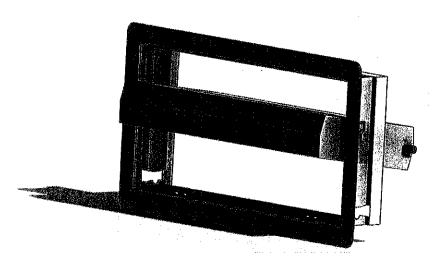


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN