# **ELEVATION CERTIFICATE**

Important: Follow the instructions on pages 1-9.

Conv al	Il pages of this Elevation Ce	ertificate and all attach	ments for (1) commun	ity official (2) insur	ance agent/company.	and (3) building owner.
JUDY al	Dades of this Lievation of	criticale and an allacin		ity official, (2) filour	anoc agono company,	and (c) building officer.

SECTION A – PROPERTY INFORMATION A1. Building Owner's Name	FOR INSURANCE COMPANY USE Policy Number:
GILBERT YANISHEVSKY	Policy Number.
<ul> <li>A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.</li> <li>307 N. VENDOME AVENUE</li> </ul>	Company NAIC Number:
City State	ZIP Code
MARGATE New Jersey	08402
A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc LOT 4, BLOCK 522	C.)
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.)RESIDEN	TIAL
A5. Latitude/Longitude: Lat. 39.32805 Long74.51472 Horizontal	l Datum: 🔲 NAD 1927 🛛 🛛 NAD 1983
A6. Attach at least 2 photographs of the building if the Certificate is being used to obtain floor	d insurance.
A7. Building Diagram Number8	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s) 1,340 sq ft	
b) Number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot	above adjacent grade 7
c) Total net area of flood openings in A8.b 1,400 sq in	
d) Engineered flood openings? X Yes No	
A9. For a building with an attached garage:	
a) Square footage of attached garage 0 sq ft	
<ul> <li>b) Number of permanent flood openings in the attached garage within 1.0 foot above adjust</li> </ul>	acent grade 0
c) Total net area of flood openings in A9.b sq in	
d) Engineered flood openings?   Yes  No	
SECTION B – FLOOD INSURANCE RATE MAP (FIRM) INFO	ORMATION 15-133
B1. NFIP Community Name & Community Number B2. County Name	B3. State
CITY OF MARGATE CITY 345304 ATLANTIC	New Jersey
B4. Map/Panel B5. Suffix B6. FIRM Index B7. FIRM Panel B8. Flood 2 Number Date Effective/	Zone(s) B9. Base Flood Elevation(s) (Zone AO, use Base
Revised Date	Flood Depth)
345304 0001 C 10/18/1983 A8	10.0
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered	in Item B9
☐ FIS Profile  FIRM	
B11. Indicate elevation datum used for BFE in Item B9: ⊠ NGVD 1929	Other/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise	e Protected Area (OPA)? 🗌 Yes 🔀 No
Designation Date: CBRS OPA	
Designation Date: CBRS OPA	

			OMB No. 1660-0008 Expiration Date: November 30, 2018	
IMPORTANT: In these spaces, copy the corre	sponding information fro	m Section A.	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Su 307 N. VENDOME AVENUE	ite, and/or Bldg. No.) or P.C	D. Route and Box No.	Policy Number:	
City MARGATE	State New Jersey	ZIP Code 08402	Company NAIC Number	
SECTION C – BUIL	DING ELEVATION INFO	RMATION (SURVEY R	EQUIRED)	
<ul> <li>C1. Building elevations are based on: C</li> <li>*A new Elevation Certificate will be require</li> <li>C2. Elevations – Zones A1–A30, AE, AH, A (w Complete Items C2.a–h below according t</li> <li>Benchmark Utilized: LOCAL BENCH</li> <li>Indicate elevation datum used for the elevation</li> </ul>	ed when construction of the vith BFE), VE, V1–V30, V (v o the building diagram spec Vertical D	building is complete. vith BFE), AR, AR/A, AR cified in Item A7. In Puer atum: <u>NGVD 1929</u>	uction* 🛛 Finished Construction VAE, AR/A1–A30, AR/AH, AR/AO. to Rico only, enter meters.	
× NGVD 1929 □ NAVD 1988	10 N. 10 N	) below.		
	t, crawlspace, or enclosure al member (V Zones only) ment servicing the building on in Comments) o building (LAG) o building (HAG) ion of deck or stairs, includi	floor) <u>6.4</u> <u>13.5</u> <u>N/A</u> <u>N/A</u> <u>13.3</u> <u>6.1</u> <u>6.4</u> ng <u>6.1</u>	X       feet       meters         X       feet       meters	
This certification is to be signed and sealed by a I certify that the information on this Certificate re statement may be punishable by fine or imprison Were latitude and longitude in Section A provide	epresents my best efforts to nment under 18 U.S. Code	interpret the data availa Section 1001.	y law to certify elevation information. <i>able. I understand that any false</i> Check here if attachments.	
Certifier's Name HOWARD A. TRANSUE	License Numbe GS33541		8	
Title PROFESSIONAL LAND SURVEYOR				
Company Name SCHAEFFER NASSAR SCHEIDEGG, CE, LLC Address 1425 CANTILLON BOULEVARD	×.	710.0.1	GS 25541 Place Seal Here Here Marcine	
City MAYS LANDING	State New Jersey	ZIP Code 08330		
Signature NIQ.C	Date 10/06/2016	Telephone (609) 625-7400		
Copy all pages of this Elevation Certificate and all	attachments for (1) commun	ity official, (2) insurance a	agent/company, and (3) building owner.	
Comments (including type of equipment and loca ITEM A8b VENTS ARE SMART VENTS, MODE ITEM C2e IS THE A.C. PAD.			0 SQ. IN. EACH.	
			From Distance of the	

ELEVATION CERTIFICATE			OMB No. 1660-0008 Expiration Date: November 30, 2018
IMPORTANT: In these spaces, copy the co	orresponding information	from Section A.	FOR INSURANCE COMPANY USE
Puilding Street Address (including Apt., Unit 307 N. VENDOME AVENUE	, Suite, and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:
City MARGATE	State New Jersey	ZIP Code 08402	Company NAIC Number
	LDING ELEVATION INFO FOR ZONE AO AND ZON		T REQUIRED)
For Zones AO and A (without BFE), complet complete Sections A, B,and C. For Items E1 enter meters.	e Items E1–E5. If the Certifi –E4, use natural grade, if a	icate is intended to support vailable. Check the measure	a LOMA or LOMR-F request, ement used. In Puerto Rico only,
<ul> <li>E1. Provide elevation information for the foll the highest adjacent grade (HAG) and the a) Top of bottom floor (including basem)</li> </ul>	he lowest adjacent grade (L		er the elevation is above or below
crawlspace, or enclosure) is b) Top of bottom floor (including basem	· · · · · · · · · · · · · · · · · · ·		
crawlspace, or enclosure) is E2. For Building Diagrams 6–9 with perman	ent flood openinas provideo	feet mete	
the next higher floor (elevation C2.b in the diagrams) of the building is		feet mete	
E3. Attached garage (top of slab) is		feet 🗌 mete	ers above or below the HAG.
E4. Top of platform of machinery and/or equ servicing the building is	lipment	feet 🗌 mete	ers above or below the HAG.
E5. Zone AO only: If no flood depth number floodplain management ordinance?	is available, is the top of the ] Yes 🗌 No 🗌 Unkno	e bottom floor elevated in a wn. The local official must	ccordance with the community's certify this information in Section G.
SECTION F – PROPE	RTY OWNER (OR OWNER	R'S REPRESENTATIVE) C	ERTIFICATION 15-153
The property owner or owner's authorized rep community-issued BFE) or Zone AO must sig	presentative who completes gn here. The statements in S	s Sections A, B, and E for Z Sections A, B, and E are co	one A (without a FEMA-issued or rrect to the best of my knowledge.
Property Owner or Owner's Authorized Repre	esentative's Name		
Address	C	City S	tate ZIP Code
Signature	C	Date Te	elephone
Comments /		1 1	
Z			
			Check here if attachments.

ELEVATION CERTIFICATE				OMB No. 1660-0008 Expiration Date: November 30, 2018
IMPORTANT: In these spaces, copy the corr	esponding information	from Section A.	1	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S 307 N VENDOME AVENUE	uite, and/or Bldg. No.) or	r P.O. Route and Box	KNO.	Policy Number:
City MARGATE	State New Jersey	ZIP Code 08402		Company NAIC Number
SECTIO	ON G - COMMUNITY IN	FORMATION (OPTI	ONAL)	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevatior used in Items G8–G10. In Puerto Rico only, er	n Certificate. Complete th			
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)				
G2. A community official completed Sect or Zone AO.	ion E for a building locat	ed in Zone A (withou	t a FEMA	-issued or community-issued BFE)
G3. The following information (Items G4-	-G10) is provided for con	nmunity floodplain m	anageme	nt purposes.
G4. Permit Number	G5. Date Permit Issue	ed		ate Certificate of ompliance/Occupancy Issued
G7. This permit has been issued for:	New Construction	Substantial Improver	ment	1. A.
G8. Elevation of as-built lowest floor (including of the building:	g basement)		🗌 feet	meters Datum
G9. BFE or (in Zone AO) depth of flooding at	the building site:		🗌 feet	meters Datum
G10. Community's design flood elevation:			🗌 feet	meters Datum
Local Official's Name JIM GALANTINO		Title CFM		
Community Name		Telephone		
CITY OF MARGATE		609-822-1§	74	
Signature		Date		
Comments (including/type of equipment and lo		8/16/20	016	
Comments (including/type of equipment and lo	cation, per C2(e), if appli	cable)		
-				
				Check here if attachments.

# **ELEVATION CERTIFICATE**

## **BUILDING PHOTOGRAPHS**

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, co	py the corresponding information	from Section A.	FOR INSURANCE COMPANY USE
uilding Street Address (including ) کن نرکر N. VENDOME AVENUE	Apt., Unit, Suite, and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
MARGATE	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

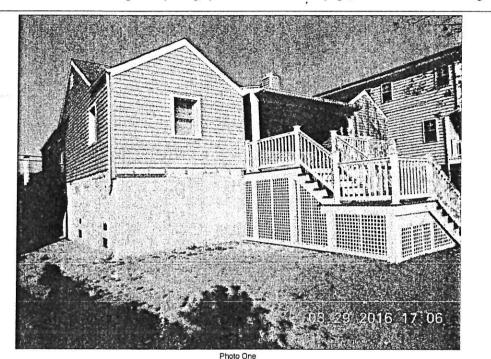


Photo One Caption FRONT VIEW AND LEFT SIDE VIEW


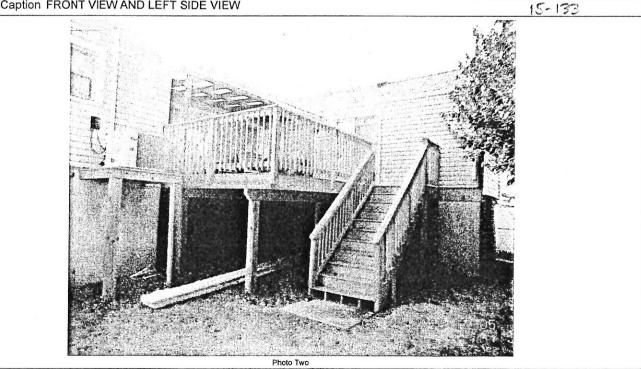


Photo Two Caption REAR VIEW



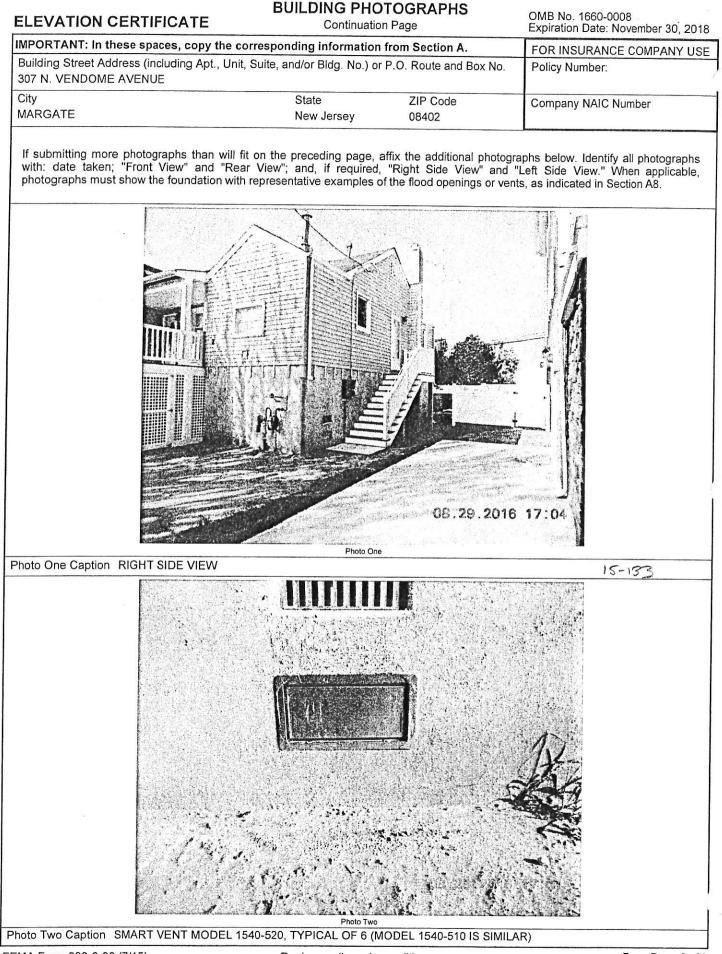

DIVISION: 08 00 00—OPENINGS SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

**REPORT HOLDER:** 

# **SMARTVENT PRODUCTS, INC.**

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

**EVALUATION SUBJECT:** 

# SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





A Subsidiary of

Copyright <sup>©</sup> 2017 ICC Evaluation Service, LLC. All rights reserved.



# **ICC-ES Evaluation Report**

Most Widely Accepted and Trusted

ESR-2074

Reissued February 2017 Revised November 2017 This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

DIVISION: 08 00 00—OPENINGS Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT<sup>®</sup> AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 *International Building Code*<sup>®</sup> (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code<sup>®</sup> (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

 $^{\dagger} \text{The ADIBC}$  is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent<sup>®</sup> units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

## 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent<sup>®</sup> FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

A Subsidiary of the International Code Council®

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent<sup>®</sup> Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT<sup>®</sup> Stacking Model #1540-511 and FloodVENT<sup>®</sup> Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT<sup>®</sup> Model #1540-510 and SmartVENT<sup>®</sup> Overhead Door Model #1540-514 both have screen covers with <sup>1</sup>/<sub>4</sub>-inch-by-<sup>1</sup>/<sub>4</sub>-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm<sup>2</sup>) of net free area to supply natural ventilation. The SmartVENT<sup>®</sup> Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm<sup>2</sup>) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

### 4.0 DESIGN AND INSTALLATION

SmartVENT<sup>®</sup> and FloodVENT<sup>®</sup> are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent<sup>®</sup> FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m<sup>2</sup>) of enclosed area, except that the SmartVENT<sup>®</sup> Stacking Model #1540-511 and FloodVENT<sup>®</sup> Stacking Model #1540-521 must be

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



installed with a minimum of one FV for every 400 square feet  $(37.2 \text{ m}^2)$  of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 5.0 CONDITIONS OF USE

The Smart Vent<sup>®</sup> FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

**5.1** The Smart Vent<sup>®</sup> FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

**5.2** The Smart Vent<sup>®</sup> FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

#### 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

## 7.0 IDENTIFICATION

The Smart VENT<sup>®</sup> models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT <sup>®</sup>	1540-520	15 <sup>3</sup> /4" X 7 <sup>3</sup> /4"	200
SmartVENT <sup>®</sup>	1540-510	15 <sup>3</sup> /4" X 7 <sup>3</sup> /4"	200
FloodVENT <sup>®</sup> Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Overhead Door	1540-514	15 <sup>3</sup> /4" X 7 <sup>3</sup> /4"	200
Wood Wall FloodVENT <sup>®</sup>	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

TABLE 1-MODEL SIZES

For SI: 1 inch = 25.4 mm; 1 square foot =  $m^2$ 

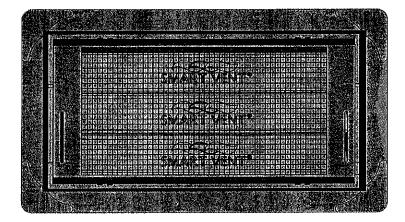


FIGURE 1-SMART VENT: MODEL 1540-510

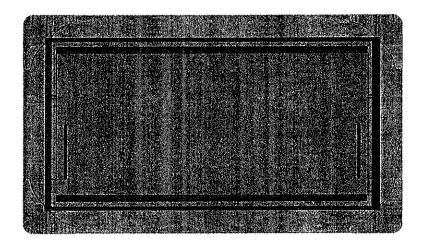


FIGURE 2-SMART VENT MODEL 1540-520

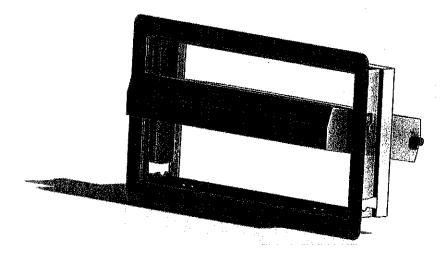


FIGURE 3-SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN