# U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

# **ELEVATION CERTIFICATE**

Important: Follow the instructions on pages 1-9.

OMB No. 1660-0008 Expiration Date: November 30, 2018

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION					FOR INSUF	RANCE COMPANY USE	
A1. Building Owner's Name  GABRIEL BUILDING GROUP  Policy Number:						ber:	
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.  439 NORTH THURLOW AVENUE  Company NAIC Number:						AIC Number:	
City MARGATE							
A3. Property Description (Lo BLOCK 520 LOT 16.02	t and Block Numbers, Tax	Parcel No	umber, Legal De	scription, etc.)			
A4. Building Use (e.g., Resid	ential, Non-Residential, Ad	ddition, A	ccessory, etc.)	RESIDENTIAL		8	
A5. Latitude/Longitude: Lat	39 19'50.1" L	ong. 74 3	0'55.2	Horizontal Datum	: NAD 1	927 × NAD 1983	
A6. Attach at least 2 photogr	aphs of the building if the (	Certificate	is being used to	obtain flood insura	nce.		
A7. Building Diagram Number	r7					ts.	
A8. For a building with a crav	vispace or enclosure(s):						
a) Square footage of cra	wlspace or enclosure(s)		sq ft				
b) Number of permanen	flood openings in the crav	vlspace o	r enclosure(s) wi	thin 1.0 foot above	adjacent gra	ade	
c) Total net area of flood	openings in A8.b	sq ir	n				
d) Engineered flood ope	nings?						
A9. For a building with an atta	ached garage:						
a) Square footage of atta	ached garage 1,474	sq	ft				
	flood openings in the attac			ot above adiacent d	rade	9	
	openings in A9.b 1,80		g in	,			
			4 ""				
a) Engineered 11000 ope	d) Engineered flood openings? X Yes No						
	SECTION B - FLOOD IN	SURANC	E RATE MAP (	FIRM) INFORMA	TION		
B1. NFIP Community Name & Community Number  MARGATE 345304  B2. County Name  ATLANTIC  B3. State  New Jersey					Entransies to-Hydroxyma		
B4. Map/Panel B5. Suffi Number	B6. FIRM Index Date	B7. FIRM Effect	/I Panel tive/ sed Date	B8. Flood Zone(s)	(Zor	e Flood Elevation(s) ne AO, use Base d Depth)	
345304/0001 C	07/21/1974	10/28/19		A-8	10.00	a Bopan,	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:  FIS Profile X FIRM Community Determined Other/Source:							
		-	_	√D 1988 □ Oth	er/Source:	,	
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No							
Designation Date:	CI	BRS 🗌	OPA				
						÷	

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Suite, and/or 439 NORTH THURLOW AVENUE	Bldg. No.) or P.O. Rout	e and Box No.	Policy Number:	
City State	Company NAIC Number			
MARGATE New				
SECTION C – BUILDING ELE	EVATION INFORMATI	ON (SURVEY RI	EQUIRED)	
C1. Building elevations are based on: Construction *A new Elevation Certificate will be required when co		ing Under Constru a is complete.	action* X Finished Construction	
C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), \			AF AR/A1_A30 AR/AH AR/AO	
Complete Items C2.a–h below according to the build Benchmark Utilized:	ing diagram specified in	Item A7. In Puert	o Rico only, enter meters.	
Indicate elevation datum used for the elevations in ite	12 (0.5 (8	<b>1.</b>		
⋈ NGVD 1929  NAVD 1988  Other/S     Datum used for building elevations must be the same.	- WALTERSON AND THE STATE OF TH	:F		
battarn used for ballaring elevations must be the same	as that according the Br		Check the measurement used.	
a) Top of bottom floor (including basement, crawlspa	ace, or enclosure floor)	6 <sub>.</sub> 61	X feet meters	
b) Top of the next higher floor		<u>14</u> . <u>40</u>	x feet meters	
c) Bottom of the lowest horizontal structural member	r (V Zones only)	N/A	x feet meters	
d) Attached garage (top of slab)		6. 61	X feet meters	
Example 2	icing the building ments)	<u> </u>	X feet meters	
f) Lowest adjacent (finished) grade next to building	(LAG)	6. 19	X feet  meters	
g) Highest adjacent (finished) grade next to building	(HAG)	6, 66	X feet  meters	
h) Lowest adjacent grade at lowest elevation of deck structural support	or stairs, including	<u>6</u> . <u>44</u>	X feet meters	
SECTION D - SURVEYOR,	ENGINEER OR ARCI	HITECT CERTIFI	CATION	
This certification is to be signed and sealed by a land surval certify that the information on this Certificate represents statement may be punishable by fine or imprisonment und	veyor, engineer, or archi	itect authorized by ret the data availa	law to certify elevation information.	
Were latitude and longitude in Section A provided by a lice		10-10-10-10-10-10-10-10-10-10-10-10-10-1		
Certifier's Name ARTHUR W. PONZIO, JR.	License Number GS28314		=	
Title LAND SURVEYOR				
Company Name ARTHUR W. PONZIO CO. & ASSOC., INC.	Place Seal			
Address 400 NORTH DOVER AVENUE			Here	
City ATLANTIC CITY		ZIP Code 08401		
Signature /		Telephone (609) 344-8194		
Copy all pages of this Elevation Certificate and all attachmen	nts for (1) community office	cial. (2) insurance a	agent/company, and (3) building owner.	
Comments (including type of equipment and location, per			2 , , , , , , , , , , , , , , , , , , ,	
PROJECT # 32616 HEATER = 14.40' AC UNIT = 13.79' SMART VENT MODEL 1540-520				
			u e	

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspon	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite, a	x No.	Policy Number:				
439 NORTH THURLOW AVENUE						
City	State	ZIP Code		Company NAIC Number		
MARGATE	New Jersey	08402				
			EX NOT	DECLUBED)		
SECTION E – BUILDING E FOR ZOI	NE AO AND ZONE			REQUIRED)		
For Zones AO and A (without BFE), complete Items E complete Sections A, B,and C. For Items E1–E4, use enter meters.						
	E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).					
crawlspace, or enclosure) is		feet	meters	above or below the HAG.		
b) Top of bottom floor (including basement, crawlspace, or enclosure) is		feet	meters	s above or below the LAG.		
For For Duilding Dispusses C. Ourith assured the d		in Continu A Hanna	0	0 ( 1 2 1 1 1		
E2. For Building Diagrams 6–9 with permanent flood the next higher floor (elevation C2.b in	openings provided	in Section A Items	8 and/or	9 (see pages 1–2 of instructions),		
the diagrams) of the building is		feet	meters	above or  below the HAG.		
E3. Attached garage (top of slab) is		feet [	meters	above or below the HAG.		
E4. Top of platform of machinery and/or equipment servicing the building is		feet [	meters	s above or below the HAG.		
E5. Zone AO only: If no flood depth number is availal floodplain management ordinance? Yes	ble, is the top of the	bottom floor eleva vn. The local offic	ted in acci	cordance with the community's certify this information in Section G.		
SECTION F - PROPERTY OV	VNER (OR OWNER	'S REPRESENTA	TIVE) CE	RTIFICATION		
The property owner or owner's authorized represental community-issued BFE) or Zone AO must sign here.	tive who completes The statements in §	Sections A, B, and E	E for Zon	ne A (without a FEMA-issued or ect to the best of my knowledge.		
Property Owner or Owner's Authorized Representative	e's Name			të.		
Address	C	ity	Sta	te ZIP Code		
Signature	D	ate /	Tel	ephone		
Comments		- /				
				Check here if attachments.		

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the cor	responding information from Section A.	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, \$ 439 N THURLOW AVENUE	Suite, and/or Bldg. No.) or P.O. Route and Bo						
City MARGATE	State ZIP Code New Jersey 08402	Company NAIC Number					
SECTI	ION G - COMMUNITY INFORMATION (OP	IONAL)					
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.							
G1. The information in Section C was ta engineer, or architect who is authoridata in the Comments area below.)	engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation						
G2. A community official completed Sec or Zone AO.	tion E for a building located in Zone A (witho	ut a FEMA-issued or community-issued BFE)					
G3.   The following information (Items G4)	-G10) is provided for community floodplain	management purposes.					
G4. Permit Number	G5. Date Permit Issued	G6. Date Certificate of Compliance/Occupancy Issued					
G7. This permit has been issued for:	New Construction Substantial Improve	ement					
G8. Elevation of as-built lowest floor (includir of the building:	ng basement)	feet meters Datum					
G9. BFE or (in Zone AO) depth of flooding at	t the building site:	feet meters Datum					
G10. Community's design flood elevation:		feet meters Datum					
Local Official's Name JIM GALANTINO	Title						
Community Name	Telephone						
CITY OF MARGATE	609-822-	974					
Signature Date 9/13/17							
Comments (including type of equipment and location, per C2(e), if applicable)							
*							
{							
		Check here if attachments.					

## **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 439 NORTH THURLOW AVENUE			Policy Number:
City	State	ZIP Code	Company NAIC Number
MARGATE	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

## Photo One Caption

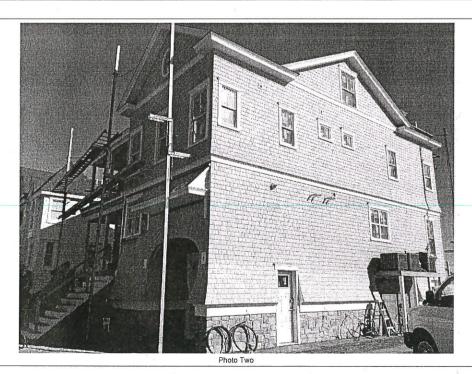


Photo Two Caption

## **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 439 NORTH THURLOW AVENUE			Policy Number:
City	State	ZIP Code	Company NAIC Number
MARGATE	New Jersey	08402	C

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.




Photo One

## Photo One Caption



Photo Two

Photo Two Caption

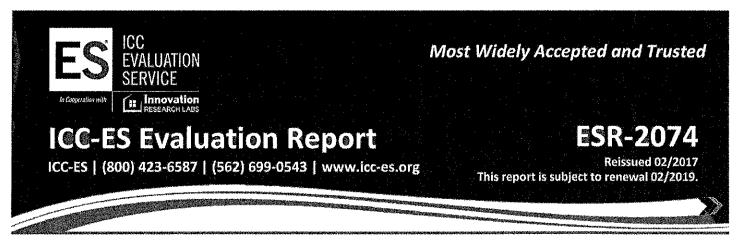

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

### **REPORT HOLDER:**

## **SMARTVENT PRODUCTS, INC.**

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



as Solice 1708s
Product Cartification Body



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



## **ICC-ES Evaluation Report**

## **ESR-2074**

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

## 4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be



installed with a minimum of one FV for every  $400 \text{ square feet } (37.2 \text{ m}^2) \text{ of enclosed area.}$ 

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

#### 5.0 CONDITIONS OF USE

The Smart Vent<sup>®</sup> FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

## 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

## 7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

**TABLE 1—MODEL SIZES** 

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT <sup>®</sup>	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT <sup>®</sup> Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>

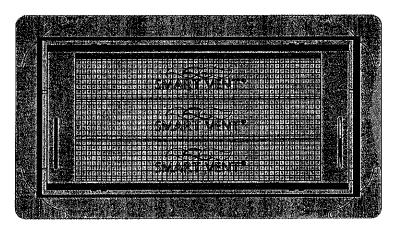


FIGURE 1—SMART VENT: MODEL 1540-510

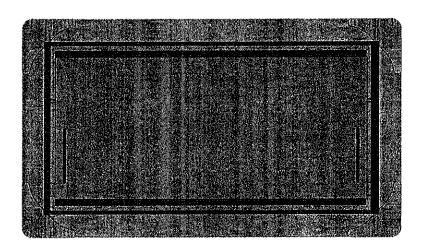


FIGURE 2-SMART VENT MODEL 1540-520

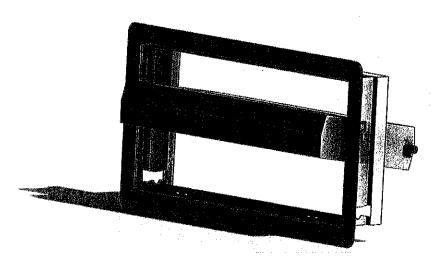


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN