U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008

Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

					FOR INSU	RANCE COMPANY USE	
A1. Building Owner's Name The Stein's				Policy Num	ber:		
A2. Building Stree Box No. #102 South Andove		luding Apt., Unit, Suite	, and/o	r Bldg. No.) or P.O.	Route and	Company I	NAIC Number:
City CITY OF MAR	GATE			State New Jersey		ZIP Code 08402	
A3. Property Desc Block 1.02 Lot 9	ription (Lot an	d Block Numbers, Tax	Parce	l Number, Legal De	scription, etc.)		
A4. Building Use (e.g., Resident	ial, Non-Residential, A	ddition	, Accessory, etc.)	RESIDENTIAL		
A5. Latitude/Longi	tude: Lat. 39	.3313	ong	- 74.4921	Horizontal Datur	n: NAD	1927 🗙 NAD 1983
A6. Attach at least	2 photograph	s of the building if the	Certific	cate is being used to	o obtain flood insur	ancė.	- .
A7. Building Diagra	am Number	8					
A8. For a building	with a crawlsp	pace or enclosure(s):					
a) Square foo	tage of crawls	pace or enclosure(s)		1,162 sq ft			
b) Number of	permanent flo	od openings in the cra	wlspac	e or enclosure(s) w	ithin 1.0 foot above	e adjacent g	rade 6
c) Total net ar	ea of flood op	enings in A8.b1,2	00 s	sq in			
d) Engineered	l flood opening	gs? 🛛 Yes 🗌 No					
A9. For a building with an attached garage:							
a) Square footage of attached garage 0 sq ft							
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 0							
,		enings in A9.b		sq in	or above adjacom		
				_ 34 111			
d) Engineered flood openings? ☐ Yes ☒ No							
	SE	CTION B - FLOOD IN	SURA	ANCE RATE MAP	(FIRM) INFORMA	ATION	
B1. NFIP Commun CITY OF MARGAT	-	-		B2. County Name ATLANTIC COUN			B3. State New Jersey
B4. Map/Panel Number 34001C00453	B5. Suffix	B6. FIRM Index Date 08/28/2018	F	FIRM Panel Effective/ Revised Date 8/2018	B8. Flood Zone(s) (Z	ase Flood Elevation(s) one AO, use Base ood Depth)
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: ☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:							
B11. Indicate elev	ation datum u	sed for BFE in Item B9):	NGVD 1929 X NA	AVD 1988 🔲 O	ther/Source	:
B12. Is the buildin	g located in a	Coastal Barrier Resou	ırces S	ystem (CBRS) area	or Otherwise Prot	ected Area	(OPA)? ☐ Yes ☒ No
Designation Date: CBRS OPA							
	HALL TO A STATE OF THE STATE OF						

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

			FOR INSURANCE COMPANY USE	
102 South Andover Avenue			Policy Number:	
CITY OF MARGATE	State ZIP (. New Jersey 0840		Company NAIC Number	
SECTION C – BU	ILDING ELEVATION INFORMAT	ION (SURVEY RI	EQUIRED)	
C1. Building elevations are based on: *A new Elevation Certificate will be requ	Construction Drawings*		uction* X Finished Construction	
C2. Elevations – Zones A1–A30, AE, AH, A Complete Items C2.a–h below according Benchmark Utilized: private Indicate elevation datum used for the ele NGVD 1929 NAVD 1988	(with BFE), VE, V1–V30, V (with BFg to the building diagram specified in Vertical Datum: evations in items a) through h) below Other/Source:	E), AR, AR/A, AR/ Item A7. In Puert NAVD88	/AE, AR/A1–A30, AR/AH, AR/AO. o Rico only, enter meters.	
Datum used for building elevations must	t be the same as that used for the Bi	r c.	Check the measurement used.	
 a) Top of bottom floor (including basem 	ent, crawlspace, or enclosure floor)	<u>9</u> . <u>9</u>	X feet meters	
b) Top of the next higher floor		13. 6	X feet meters	
c) Bottom of the lowest horizontal struc	tural member (V Zones only)	N/A	X feet meters	
d) Attached garage (top of slab)		N/A	X feet meters	
e) Lowest elevation of machinery or equal (Describe type of equipment and local	uipment servicing the building ation in Comments)	11.0	x feet meters	
f) Lowest adjacent (finished) grade nex	kt to building (LAG)	9.5	X feet meters	
g) Highest adjacent (finished) grade ne	xt to building (HAG)	10. 0	X feet meters	
h) Lowest adjacent grade at lowest elev structural support	vation of deck or stairs, including	N/A	X feet meters	
SECTION D - SI	URVEYOR, ENGINEER, OR ARC	HITECT CERTIF	ICATION	
This certification is to be signed and sealed to I certify that the information on this Certificate statement may be punishable by fine or impr	e represents my best efforts to inter	oret the data availa	y law to certify elevation information. able. I understand that any false	
Were latitude and longitude in Section A pro-	vided by a licensed land surveyor?	⊠Yes □No		
Certifier's Name Paul M. Koelling, PLS, CFM	License Number NJ24GS 04328800			
Title Licensed Land Surveyor				
Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300			Place Seal Here	
Address 2161 Shore Road				
City Linwood	State New Jersey	ZIP Code 08221		
Signature Taul See	Date 10-30-18	Telephone (609) 927-0279		
Copy all pages of this Elevation Certificate and	all attachments for (1) community of	ficial, (2) insurance	agent/company, and (3) building owner.	
Comments (including type of equipment and *A8b.) Smart Vents Model #1540-510 engine		rea each		
***C2a.) crawlspace				
****C2e.) exterior air unit (elev 13.3)ductw	ork (elev 11.0)furnace (elev 13.6	6)water heater (elev 16.0)elev pit (elev 8.8)	
			·	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

					NSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, an #102 South Andover Avenue	d/or Bldg. No.) o	r P.O. Route	e and Box No	Policy	Number:
•	State New Jersey	ZIP C 08402		Comp	any NAIC Number
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)					
For Zones AO and A (without BFE), complete Items E complete Sections A, B, and C. For Items E1–E4, use enter meters.					
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement,					
crawlspace, or enclosure) is b) Top of bottom floor (including basement,			feet l	meters	above or below the HAG.
crawlspace, or enclosure) is E2. For Building Diagrams 6–9 with permanent flood of					above or below the LAG.
the next higher floor (elevation C2.b in the diagrams) of the building is	openings provide		feet []		above orbelow the HAG.
E3. Attached garage (top of slab) is			feet	meters 🔲	above or below the HAG.
E4. Top of platform of machinery and/or equipment servicing the building is			feet :	meters	above or below the HAG.
E5. Zone AO only: If no flood depth number is availabed floodplain management ordinance? Yes	le, is the top of t No Dunkr	he bottom fl nown. The	oor elevated local official r	in accordang must certify t	ce with the community's his information in Section G.
SECTION F – PROPERTY OW	NER (OR OWN	ER'S REPR	ESENTATIV	E) CERTIFIC	CATION
The property owner or owner's authorized representat community-issued BFE) or Zone AO must sign here. T	ive who complet he statements in	es Sections n Sections A	A, B, and E to A, B, and E ar	for Zone A (v	vithout a FEMA-issued or the best of my knowledge.
Property Owner or Owner's Authorized Representative's Name					
Address		City		State	ZIP Code
Signature		Date		Telephon	e
Comments	·				
	· .				
					•
					Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box #102 South Andover Avenue	No. Policy Number:				
City State ZIP Code CITY OF MARGATE New Jersey 08402	Company NAIC Number				
SECTION G – COMMUNITY INFORMATION (OPTI	ONAL)				
The local official who is authorized by law or ordinance to administer the community's flood Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) used in Items G8–G10. In Puerto Rico only, enter meters.					
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)					
G2. A community official completed Section E for a building located in Zone A (without a FEMA-issued or community-issued BFE) or Zone AO.					
G3. The following information (Items G4–G10) is provided for community floodplain m	nanagement purposes.				
G4. Permit Number G5. Date Permit Issued	G6. Date Certificate of Compliance/Occupancy Issued				
G7. This permit has been issued for: New Construction Substantial Improve	ment				
G8. Elevation of as-built lowest floor (including basement) of the building:	feet meters Datum				
G9. BFE or (in Zone AO) depth of flooding at the building site:	feet meters Datum				
G10. Community's design flood elevation:	feet meters Datum				
Local Official's Name Title	CFM				
Community Name MANGGTE Telephone 60	15.822-1914				
Signature Date	11/1/18				
Comments (including type of equipment and location, per C2(e), if applicable)					
	,				
	Check here if attachments.				

Building Photographs

	For Insurance Company Use:		
Building Street Address (including #102 South Andover Ave	Policy Number		
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least two building photographs below according to the instructions for Item A6. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." If submitting more photographs than will fit on this page, use the Continuation Page on the reverse.





Front View – Date of Photograph: (See Photo Stamp)


Rear View – Date of Photograph: (See Photo Stamp)





Right Side View – Date of Photograph: (See Photo Stamp)

Left Side View – Date of Photograph: (See Photo Stamp)

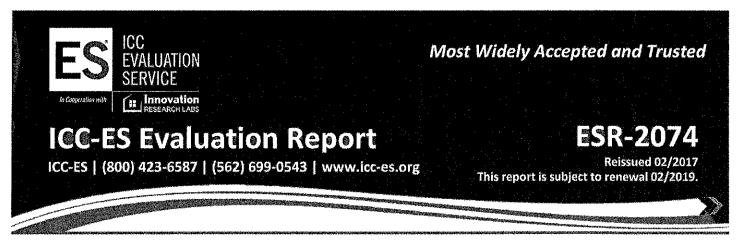

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071


EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent[®] Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT[®] Stacking Model #1540-511 and FloodVENT[®] Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be



installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent[®] FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®]	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT [®] Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT [®] Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

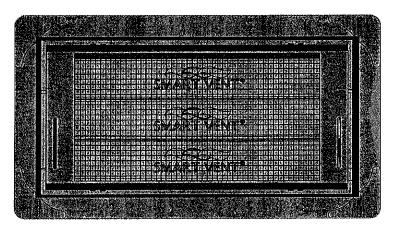


FIGURE 1—SMART VENT: MODEL 1540-510

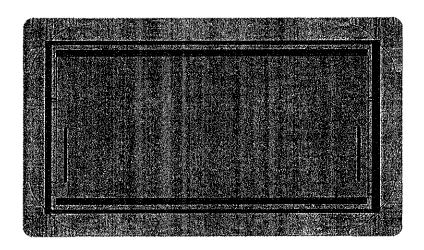


FIGURE 2-SMART VENT MODEL 1540-520

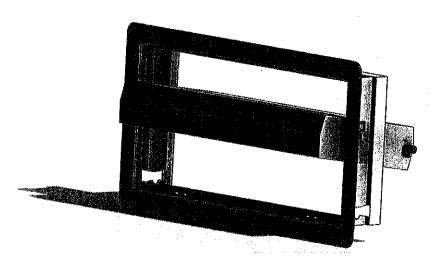


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN