U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official. (2) insurance agent/company, and (3) building

					anney Onne	mai, (2) 11130	mance agenticomp	any, and (3) building owne
SECTION A - PROPERTY INFORMATION A1. Building Owner's Name				FOR INS	URANCE COMPANY USI			
JJCC LONGPORT, L.L.C.				Policy Nu	mber:			
	eet Address (including Apt., Unit, S	uite, and	/or Bldg. No.)	or P.O.	Route and	Company	NAIC Number:
City	AVENUE			State				CASE
MARGATE				New J	ersey		ZIP Code 08402	
A3. Property De LOT 4, BLOCK 3	scription (Lot 02.02	and Block Numbers,	Tax Parc	el Number, L	egal De	scription, e		
A4. Building Use	(e.g., Reside	ential, Non-Residentia	I. Additio	n. Accessorv	efc.)	RESIDEN	JTIAI	XXX
A5. Latitude/Lon				-74.49645			- monuply - manufacture - manu	1927 × NAD 1983
	•	phs of the building if t			used to			1927 X NAD 1983
A7. Building Diag			10 001	odio ia bellig	useu to	obtain not	ou insurance.	
		space or enclosure(s)						
		/Ispace or enclosure(s			000.00	3 na #		
			-	o or on elemen	888.90	-		
		lood openings in the openings in A8.b				nin 1.0 too	t above adjacent g	rade 5
				1000.00 sq	In			
d) Engineere			No					
A9. For a building	with an attac	hed garage:						
a) Square foo	tage of attac	hed garage		N/A sq	ft			
b) Number of	permanent fl	ood openings in the a	ttached g	jarage within	1.0 foot	above adi	acent grade N/A	
		penings in A9.b		N/A so		•		The second of th
d) Engineered		***************************************	No.	1177	1 "'			
-,g	. nood oponii	igo. [] les [A] l	10					
	SE	CTION B - FLOOD	INSURA	NCE RATE	MAP (F	IRM) INF	ORMATION	17-319
B1. NFIP Commun	ity Name & C	community Number		B2. County				B3. State
CITY OF MARGAT	E 345304 .	•		ATLANTIC				New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. Fle Zone(s		B9. Base Flood E (Zone AO, us	I Elevation(s) e Base Flood Depth)
34001C0453	F	08-28-2018	08-28-2		AE		8.0	
		Base Flood Elevation Community Deterr				th entered	in Item B9:	
B11. Indicate eleva	ition datum u	sed for BFE in Item B	9: 🔲 N	GVD 1929	× NAV	D 1988 [Other/Source:	
B12. Is the building	located in a	Coastal Barrier Resor	urces Sy	stem (CBRS) area or	Otherwise	Protected Area (DPA)? ☐ Yes ☒ No
Designation D				□ OPA			The state of the s	[169 [V] MO
-								
	· · · · · · · · · · · · · · · · · · ·							

ELEVATION CERTIFICATE OMB No. 1660-0008 Expiration Date: November 30, 2018 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 105 N. BARCLAY AVENUE City State ZIP Code Company NAIC Number MARGATE New Jersey 08402 SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) C1. Building elevations are based on: ☐ Construction Drawings* ☐ Building Under Construction* X Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations -- Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO. Complete Items C2.a-h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: LOCAL BENCH Vertical Datum: NAVD 1988 Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ☒ NAVD 1988 ☐ Other/Source: Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. a) Top of bottom floor (including basement, crawlspace, or enclosure floor) 6.46 ⊠ feet meters b) Top of the next higher floor 11.13 X feet meters c) Bottom of the lowest horizontal structural member (V Zones only) N/A ☐ feet ☐ meters d) Attached garage (top of slab) N/A feet meters e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments) 11.46 X feet meters f) Lowest adjacent (finished) grade next to building (LAG) 6.06 X feet meters 'g) Highest adjacent (finished) grade next to building (HAG) 6.40 X feet meters Lowest adjacent grade at lowest elevation of deck or stairs, including structural support 5.92 × feet meters SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor? ⊠ Yes □ No ○ Check here if attachments. Certifier's Name License Number HOWARD A. TRANSUE GS33541 9533541 PROFESSIONAL LAND SURVEYOR Company Name SCHAEFFER NASSAR SCHEIDEGG, CE, LLC Address 1425 CANTILLON BOULEVARD State ZIP Code MAYS LANDING New Jersey 08330 Signature Date Telephone Ext. 09-11-2018 (609) 625-7400 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

Comments (including type of equipment and location, per C2(e), if applicable)

ITEM A8b VENTS ARE SMART VENTS MODEL 1540-570 RATED AT 200 SQ. IN. EACH.

ITEM C2e IS THE HEATING SYSTEM.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

	py the corresponding information	Trom Section A.	FOR INSURANCE COMPANY USE		
Bullding Street Address (including 105 N. BARCLAY AVENUE	Apt., Unit, Suite, and/or Bldg. No.) or	r P.O. Route and Box No.	Policy Number:		
City MARGATE	State New Jersey	ZIP Code 08402	Company NAIC Number		
SECTION	E – BUILDING ELEVATION INFO FOR ZONE AO AND ZON		REQUIRED)		
For Zones AO and A (without BFE) complete Sections A, B,and C. For enter meters.	, complete Items E1–E5. If the Certi Items E1–E4, use natural grade, if a	ficate is intended to support a evailable. Check the measure	LOMA or LOMR-F request, ment used. In Puerto Rico only,		
E1. Provide elevation information f the highest adjacent grade (H/ a) Top of bottom floor (includi crawlspace, or enclosure)		priate boxes to show whethe LAG).			
b) Top of bottom floor (including crawlspace, or enclosure) i	ng basement,				
the next higher floor (elevation					
the diagrams) of the building is E3. Attached garage (top of slab) is					
E4. Top of platform of machinery a servicing the building is	nd/or equipment		s above or below the HAG.		
E5. Zone AO only: If no flood depth floodplain management ordinal	n number is available, is the top of th nce?		cordance with the community's certify this information in Section G.		
SECTION F	- PROPERTY OWNER (OR OWNE	R'S REPRESENTATIVE) CE	RTIFICATION 17-319		
The property owner or owner's auth	orized representative who complete	s Sections A. B. and E for Zo	ne A (without a FEMA-issued or		
community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge. Property Owner or Owner's Authorized Representative's Name					
Property Owner or Owner's Authoriz	zed Representative's Name		, , , , , , , , , , , , , , , , , , , ,		
Property Owner or Owner's Authoriz Address		Dity Sta			
	. (Oity Ste			
Address	. (Oity Ste	ite ZIP Code		
Address Signature	. (Oity Ste	ite ZIP Code		
Address Signature	. (Oity Ste	ite ZIP Code		
Address Signature	. (Oity Ste	ite ZIP Code		
Address Signature	. (Oity Ste	ite ZIP Code		
Address Signature	. (Oity Ste	ite ZIP Code		
Address Signature	. (Oity Ste	ite ZIP Code		
Address Signature	. (Oity Ste	ite ZIP Code		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section	A. FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route an 105 N. BARCLAY AVENUE	d Box No. Policy Number:
City State ZIP Code MARGATE New Jersey 08402	Company NAIC Number
SECTION G - COMMUNITY INFORMATION (OPTIONAL) 17-319
The local official who is authorized by law or ordinance to administer the community's Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable ite used in Items G8–G10. In Puerto Rico only, enter meters.	landalain and li
G1. The information in Section C was taken from other documentation that has be engineer, or architect who is authorized by law to certify elevation information data in the Comments area below.)	een signed and sealed by a licensed surveyor, 1. (Indicate the source and date of the elevation
G2. A community official completed Section E for a building located in Zone A (w or Zone AO.	thout a FEMA-issued or community-issued BFE)
G3. The following information (Items G4–G10) is provided for community floodpla	in management purposes.
G4. Permit Number G5. Date Permit Issued	G6. Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for: New Construction Substantial Impr	ovement
G8. Elevation of as-built lowest floor (including basement) of the building:	feet meters Datum
G9. BFE or (in Zone AO) depth of flooding at the building site:	feet meters Datum
G10. Community's design flood elevation:	feet meters Datum
Local Official's Name Jen Calent: no Cr	M
Community Name AFR6575 Telephone	19-822-1976
Signature Date	79-822-1976
Comments (including type of equipment and location, per C2(e), if applicable)	7 - 7 - 0
	Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

MPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including 105 N. BARCLAY AVENUE	Apt., Unit, Suite, and/or Bldg. No.) or	P.O. Route and Box No	
City MARGATE	State New Jersey	ZIP Code 08402	Company NAIC Number

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption FRONT VIEW AND RIGHT SIDE VIEW

17-319

Clear Photo One



Photo Two

Photo Two Caption FRONT VIEW AND LEFT SIDE VIEW

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these species	**		1 10 10 10 10 10 10 10 10 10 10 10 10 10
IMPORTANT: In these spaces, copy th	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., I 105 N. BARCLAY AVENUE	Policy Number:		
City MARGATE	State New Jersey	ZIP Code 08402	Company NAIC Number

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption REAR VIEW

17-319

Clear Photo Three

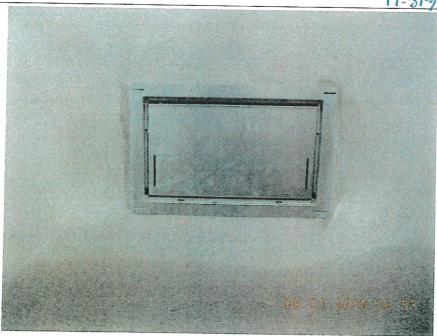


Photo Four

Photo Four Caption SMART VENT MODEL 1540-570 TYPICAL OF 5

Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2017
This report is subject to renewal 02/2019.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.







ICC-ES Evaluation Report

ESR-2074

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

 $^{\dagger}\text{The ADIBC}$ is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent[®] units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be

installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT [®] Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®] Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT [®] Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

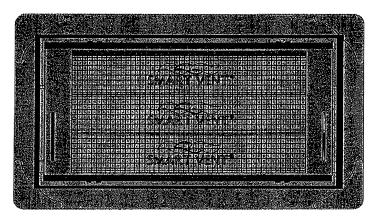


FIGURE 1-SMART VENT: MODEL 1540-510

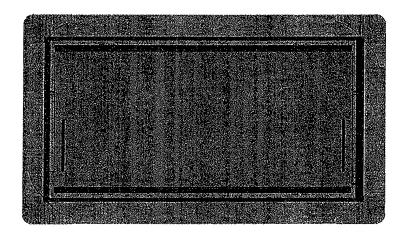


FIGURE 2-SMART VENT MODEL 1540-520

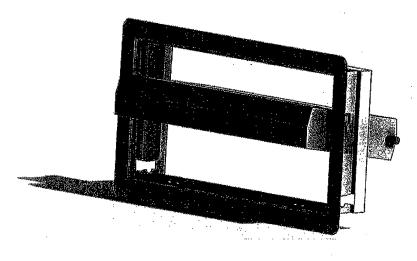


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN