## U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

# **ELEVATION CERTIFICATE**

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A – PROPERTY INFORMATION				FOR INSUF	RANCE COMPANY USE			
A1. Building Owner Alexandria Builder							Policy Num	ber:
A2. Building Stree Box No. 12 S. Mansfield Av	·	cluding Apt., Unit, Sui	ite, and/c	or Bldg. No.) o	or P.O. I	Route and	Company N	AIC Number:
City Margate	State ZIP Code New Jersey 08402							
A3. Property Desc Block 114 Lot 14	cription (Lot a	and Block Numbers, T	ax Parce	l Number, Le	gal Des	cription, etc	.)	
A4. Building Use (	e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.)	Residential		
A5. Latitude/Longi	tude: Lat. <u>N</u>	I 39d19'34.7"	Long. <u>V</u>	V 74d30'19.7'		Horizontal	Datum: 🔲 NAD 1	927 🔀 NAD 1983
A6. Attach at least	2 photograp	hs of the building if th	e Certific	ate is being ι	used to	obtain flood	insurance.	
A7. Building Diagr	am Number	8						
A8. For a building	with a crawls	space or enclosure(s):						
a) Square foo	tage of craw	lspace or enclosure(s)	)	***	1250.00	sq ft		
b) Number of	oermanent fl	ood openings in the c	awIspac	e or enclosur	e(s) with	hin 1.0 foot	above adjacent gra	de <u>12</u>
c) Total net ar	ea of flood o	penings in A8.b	2	2400.00 sq ir	1			
d) Engineered	l flood openir	ngs? 🗵 Yes 🗌 I	Vo					**
A9. For a building v	vith an attacl	ned garage:						
a) Square foot	age of attach	ned garage		sq ft				
b) Number of p	permanent flo	ood openings in the at	tached g	arage within	1.0 foot	above adja	cent grade	
c) Total net ar	ea of flood o <sub>l</sub>	penings in A9.b		sq	in			
d) Engineered flood openings?   Yes   No								
	0.5	TOTION D. FLOOD	INOLIDA	NOE DATE	344 D //		DMATION.	
R1 NEID Commun		Community Number	INSURA	B2. County	<u>`</u>	FIRM) INFO	RIVIATION	B3. State
Margate 345304		community Number		Atlantic	IName			New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. FI Zone(		B9. Base Flood E (Zone AO, use	evation(s) e Base Flood Depth)
34001C434	F	08-28-2018	08-28-2		AE		9.00	
		Base Flood Elevation				oth entered i	n Item B9:	
☐ FIS Profile	FIRM	Community Deter	mined [	Other/Sou	rce:			
B11. Indicate eleva	ation datum ι	used for BFE in Item B	9: 🗌 N	GVD 1929	⊠ NA\	/D 1988 [	Other/Source:	
B12. Is the building	g located in a	Coastal Barrier Resc	urces Sy	stem (CBRS	) area c	or Otherwise	Protected Area (C	PA)? ☐ Yes ⊠ No
Designation [	Date:		CBRS	☐ OPA				

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 12 S. Mansfield Avenue City State ZIP Code Company NAIC Number Margate **New Jersey** 08402 SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) C1. Building elevations are based on: Construction Drawings\* Building Under Construction\* Finished Construction \*A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a-h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: RM#1 Vertical Datum: NAVD 1988 Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ☒ NAVD 1988 ☐ Other/Source: Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. a) Top of bottom floor (including basement, crawlspace, or enclosure floor) 8.0 X feet meters b) Top of the next higher floor 13.1 meters N/A feet c) Bottom of the lowest horizontal structural member (V Zones only) meters N/A T feet meters d) Attached garage (top of slab) e) Lowest elevation of machinery or equipment servicing the building 13.1 meters (Describe type of equipment and location in Comments) 8.0 X feet f) Lowest adjacent (finished) grade next to building (LAG) meters 8.6 X feet meters g) Highest adjacent (finished) grade next to building (HAG) h) Lowest adjacent grade at lowest elevation of deck or stairs, including 8.0 |X | feet meters structural support SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor? 

Yes 
No Check here if attachments. Certifier's Name License Number 24GS03126400 James R. Boney, PLS Title Professional Land Surveyor Place Company Name James R. Boney & Assoc. Address 13 Stone Mill Court ZIP Code State Egg Harbor Township **New Jersey** 08234 Date Telephone Signature Ext. 03-11-2020 (609) 788-8013 Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) 2.5 Story dwelling on crawlspace. All mechanicals are above the FF elevation (C2b)

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 12 S. Mansfield Avenue City State ZIP Code Company NAIC Number Margate **New Jersey** 08402 SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE) For Zones AO and A (without BFE), complete Items E1-E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1-E4, use natural grade, if available. Check the measurement used. In Puerto Rico only. E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement, crawlspace, or enclosure) is b) Top of bottom floor (including basement, crawlspace, or enclosure) is feet meters above or below the LAG. E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/or 9 (see pages 1–2 of Instructions), the next higher floor (elevation C2.b in the diagrams) of the building is feet meters above or below the HAG. E3. Attached garage (top of slab) is ☐ feet ☐ meters above or below the HAG. E4. Top of platform of machinery and/or equipment servicing the building is E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance? Yes No Unknown. The local official must certify this information in Section G. SECTION F - PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge. Property Owner or Owner's Authorized Representative's Name Address City State ZIP Code Signature Date Telephone Comments Check here if attachments.

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 12 S. Mansfield Avenue	Policy Number:			
City State ZIP Code Margate New Jersey 08402	Company NAIC Number			
SECTION G - COMMUNITY INFORMATION (OPTIONAL)				
The local official who is authorized by law or ordinance to administer the community's floodplain m Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and signsed in Items G8–G10. In Puerto Rico only, enter meters.	anagement ordinance can complete in below. Check the measurement			
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)				
G2. A community official completed Section E for a building located in Zone A (without a FEN or Zone AO.	MA-issued or community-issued BFE)			
G3. The following information (Items G4–G10) is provided for community floodplain manager	nent purposes.			
G4. Permit Number G5. Date Permit Issued G6.	Date Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for: New Construction Substantial Improvement				
G8. Elevation of as-built lowest floor (including basement) of the building:	et  meters Datum			
G9. BFE or (in Zone AO) depth of flooding at the building site:	t meters Datum			
G10. Community's design flood elevation:	et meters Datum			
Local Official's Name Title	4			
Community Name  CFI  Community Name  Telephone  MANATE  608-	522-1978			
Signature	113 /2020			
Comments (including type of equipment and location, per C2(e), if applicable)				
	Check here if attachments.			

## **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., U 12 S. Mansfield Avenue	Policy Number:		
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption Front 03-10-20

Clear Photo One



Photo Two

Photo Two Caption Rear 03-10-20

Clear Photo Two
Form Page 5 of 6

## **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Ap 12 S. Mansfield Avenue	Policy Number:		
City Margate	State New Jersey	ZIP Code 08402	Company NAIC Number
ivialgate	New Jersey	00402	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption Smart Vent (typical, one of twelve) 03-10-20


Clear Photo Three

Photo Four

Photo Four

Photo Four Caption

Clear Photo Four Form Page 6 of 6

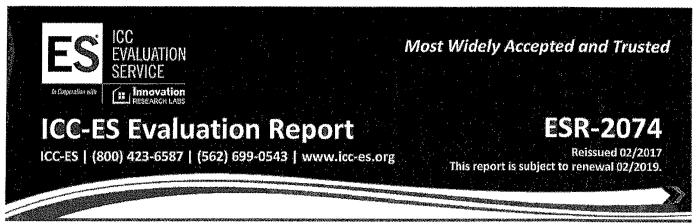

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

## REPORT HOLDER:

## **SMARTVENT PRODUCTS, INC.**

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

## **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.







## **ICC-ES Evaluation Report**

ESR-2074

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### **2.0 USES**

The Smart Vent<sup>®</sup> units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

## 3.0 DESCRIPTION

### 3.1 General:

When subjected to rising water, the Smart Vent<sup>®</sup> FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square Inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

## 4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-04 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be



installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

## 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent<sup>®</sup> FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

## **6.0 EVIDENCE SUBMITTED**

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

#### 7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

**TABLE 1-MODEL SIZES** 

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT <sup>®</sup>	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT <sup>®</sup> Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>

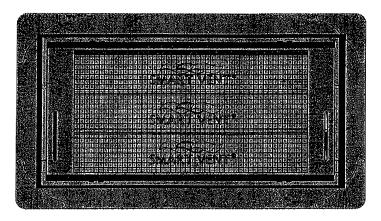


FIGURE 1-SMART VENT: MODEL 1540-510

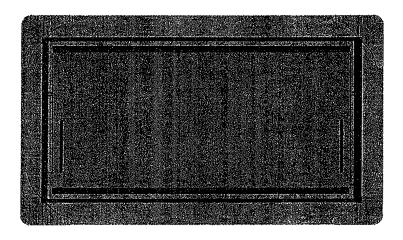


FIGURE 2-SMART VENT MODEL 1540-520

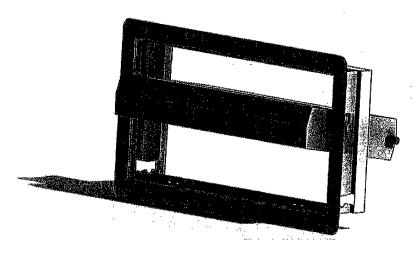


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN