*U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY	INFORMATION	F	OR INSUR	ANCE COMPANY USE		
A1. Building Owner's Name The Cohen's Policy Number:						
A2. Building Street Address (including Apt., Unit, Suite Box No. #21 North Douglass Avenue	, and/or Bldg. No.) or P.O.	Route and C	Company NA	AIC Number:		
City CITY OF MARGATE	State New Jersey		IP Code 8402			
A3. Property Description (Lot and Block Numbers, Tax Block 204.03 Lot 1	Parcel Number, Legal De	scription, etc.)				
A4. Building Use (e.g., Residential, Non-Residential, A	addition, Accessory, etc.)	RESIDENTIAL				
A5. Latitude/Longitude: Lat. 39.3322	Long. <u>-74.4978</u>	Horizontal Datum:	☐ NAD 1	927 🗵 NAD 1983		
A6. Attach at least 2 photographs of the building if the	Certificate is being used to	o obtain flood insurar	ice.			
A7. Building Diagram Number 7						
A8. For a building with a crawlspace or enclosure(s):	,					
a) Square footage of crawlspace or enclosure(s)	648 sq ft					
b) Number of permanent flood openings in the cra	wlspace or enclosure(s) w	rithin 1.0 foot above a	adjacent gra	de5		
c) Total net area of flood openings in A8.b 1,0	00 sq in					
d) Engineered flood openings? X Yes N						
A9. For a building with an attached garage:						
a) Square footage of attached garage0	sq ft					
b) Number of permanent flood openings in the att	ached garage within 1.0 fc	ot above adjacent gr	ade	0		
c) Total net area of flood openings in A9.b						
d) Engineered flood openings? Yes X N						
d) Engineered nood openinger.	•					
SECTION B - FLOOD II	NSURANCE RATE MAP	(FIRM) INFORMAT	ION			
B1. NFIP Community Name & Community Number CITY OF MARGATE & 345304	B2. County Name ATLANTIC COUN			B3. State New Jersey		
D4 May (David D5 Coffin D6 FIRM Index	DZ FIDM Denel	B8. Flood Zone(s)	PO Poo	e Flood Elevation(s)		
B4. Map/Panel B5. Suffix B6. FIRM Index Date	B7. FIRM Panel Effective/	Bo. Flood Zone(s)	(Zor	ne AO, use Base		
34001C0453 F 08/28/2018	Revised Date 08/28/2018	AE	9	d Depth)		
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:						
☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:						
B11. Indicate elevation datum used for BFE in Item B9	9: 🗌 NGVD 1929 🔀 N	AVD 1988 Oth	er/Source: _			
B12. Is the building located in a Coastal Barrier Resou	urces System (CBRS) area	or Otherwise Protec	ted Area (C	PA)? ☐ Yes ⊠ No		
Designation Date:	CBRS OPA					
						

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE			
			Policy Number:			
City CITY	Sta OF MARGATE Ne	ite w Jersey	ZIP Code 08402		Company NAIC Number	
	SECTION C – BUILDING EL	EVATION INFOR	MATION (SUI	RVEY RI	EQUIRED)	٦
C1.	Building elevations are based on: Construction	on Drawings*	Building Unde	Constru	ruction*	
	*A new Elevation Certificate will be required when c		•			
C2.	Elevations – Zones A1–A30, AE, AH, A (with BFE), Complete Items C2.a–h below according to the buil	ding diagram speci	fied in Item A7.	R/A, AR/ In Puert	t/AE, AR/A1–A30, AR/AH, AR/AO. rto Rico only, enter meters.	
	Benchmark Utilized: private	-	tum: <u>NAVD88</u>			
	Indicate elevation datum used for the elevations in i ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other/		below.			
	Datum used for building elevations must be the same	ne as that used for t	he BFE.		Check the measurement used.	
	a) Top of bottom floor (including basement, crawlsp	pace, or enclosure t	floor)	6. 4		
	b) Top of the next higher floor			5.6	X feet meters	
	c) Bottom of the lowest horizontal structural member	er (V Zones only)	N	<u>′A</u>	X feet meters	
	d) Attached garage (top of slab)		N.	<u>′A</u>	x feet meters	
	e) Lowest elevation of machinery or equipment ser (Describe type of equipment and location in Con	rvicing the building nments)	Bernali verblen benannsken riksskenske	1. 3	X feet meters	
	f) Lowest adjacent (finished) grade next to building	(LAG)	•	<u>6</u> . <u>1</u>	X feet meters	
	g) Highest adjacent (finished) grade next to building	g (HAG)		<u>6</u> . <u>5</u>	X feet meters	
	h) Lowest adjacent grade at lowest elevation of destructural support	ck or stairs, includir	ng	<u>6</u> . <u>5</u>	X feet meters	
	SECTION D – SURVEYOR	, ENGINEER, OR	ARCHITECT	CERTIF	FICATION	
I cei	certification is to be signed and sealed by a land su tify that the information on this Certificate represents ement may be punishable by fine or imprisonment un	s my best efforts to	interpret the da	orized by ata availa	y law to certify elevation information. lable. I understand that any false	
	e latitude and longitude in Section A provided by a li			□No	Check here if attachments.	
	ifier's Name I M. Koelling, PLS, CFM	License Number NJ24GS 043288				
Title		1402400 040200			_	
	nsed Land Surveyor					
	npany Name I Koelling & Associates, LLC NJ C.O.A. No. 24GA2	28256300			Place Seal	
Add		****			—— Here	
	1 Shore Road					
City Linw	vood .	State New Jersey	ZIP Cod 08221	€		
Sigr	ature Taul velle	Date //-5-/9	Telepho (609) 92			
Copy	all pages of this Elevation Certificate and all attachme	ents for (1) commun	ity official, (2) ir	surance	agent/company, and (3) building owne	r.
	ments (including type of equipment and location, pe b.) Five (5) Smart Vents Model #1540-1520 engineer			ea each	1	
**C2	a.) enclosure with garage, storage, stairs, and, utility	y room				
***C	2e.) furnace (elev 12.3)ductwork (elev 12.4)wa	ater heater (elev 11	.3)			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the correspon	FOR INSURA	NCE COMPANY USE				
Building Street Address (including Apt., Unit, Suite, ar #21 North Douglass Avenue	nd/or Bldg. No.) or P.	O. Route and Box No.	Policy Numbe	r:		
CITY OF MARGATE	State New Jersey	ZIP Code 08402	Company NAI	C Number		
SECTION E – BUILDING E FOR ZON	LEVATION INFORM NE AO AND ZONE	MATION (SURVEY NO A (WITHOUT BFE)	OT REQUIRED)			
For Zones AO and A (without BFE), complete Items E complete Sections A, B,and C. For Items E1–E4, use enter meters.	:1–E5. If the Certifica natural grade, if avai	te is intended to suppo lable. Check the meas	rt a LOMA or LOM urement used. In F	R-F request, Puerto Rico only,		
E1. Provide elevation information for the following anthe highest adjacent grade (HAG) and the lowesta) Top of bottom floor (including basement,	d check the appropriated the control of the control	ate boxes to show whe G).	ther the elevation i	s above or below		
crawlspace, or enclosure) is b) Top of bottom floor (including basement,				below the HAG.		
crawlspace, or enclosure) is E2. For Building Diagrams 6–9 with permanent flood	openings provided ir			r ☐ below the LAG. -2 of Instructions),		
the next higher floor (elevation C2.b in the diagrams) of the building is		feet me	eters	r below the HAG.		
E3. Attached garage (top of slab) isE4. Top of platform of machinery and/or equipment		feet me	eters 🔲 above o	r Delow the HAG.		
servicing the building is	hie is the top of the h			be community's		
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance? Yes No Unknown. The local official must certify this information in Section G.						
SECTION F - PROPERTY OW	NER (OR OWNER'S	S REPRESENTATIVE)	CERTIFICATION			
The property owner or owner's authorized represental community-issued BFE) or Zone AO must sign here.	tive who completes S The statements in Se	Sections A, B, and E for ections A, B, and E are	Zone A (without a correct to the best	FEMA-issued or of my knowledge.		
Property Owner or Owner's Authorized Representative	e's Name			1,000,000,000,000,000,000,000,000,000,0		
Address	City	у	State	ZIP Code		
Signature	Da	te	Telephone			
Comments						
	•					
•						
			☐ Check	here if attachments.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from S	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. #21 North Douglass Avenue Policy Number:				
	IP Code 8402	Company NAIC Number		
SECTION G - COMMUNITY INFORMA				
The local official who is authorized by law or ordinance to administer the comm Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applic	nunity's floodplain mai	nagement ordinance can complete below. Check the measurement		
used in Items G8–G10. In Puerto Rico only, enter meters. G1. The information in Section C was taken from other documentation the engineer, or architect who is authorized by law to certify elevation information.	at has been signed ar	nd sealed by a licensed surveyor,		
data in the Comments area below.)	offiation. (Indicate th	e source and date of the elevation		
G2. A community official completed Section E for a building located in Zo or Zone AO.	one A (without a FEM/	A-issued or community-issued BFE)		
G3. The following information (Items G4–G10) is provided for community	floodplain manageme	ent purposes.		
G4. Permit Number G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued		
G7. This permit has been issued for: New Construction Substant	ntial Improvement			
G8. Elevation of as-built lowest floor (including basement) of the building:	feet	meters Datum		
G9. BFE or (in Zone AO) depth of flooding at the building site:	feet	meters Datum		
G10. Community's design flood elevation:	feet	meters Datum		
Local Official's Name J. a Colartino	(F	М		
Community Name Toleph MANGATE	609	-812-1974		
Signature Date		11/6/15		
Comments (including type of equipment and location, per C2(e), if applicable)				
		Check here if attachments.		



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2019
This report is subject to renewal 02/2021.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS:

MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574;

#1540-524; #1540-514

FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2019 This report is subject to renewal February 2021.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square

feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- **6.2** Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT[®] models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1—MODEL SIZES	TABL	E 1-	COM-	EL	SIZES
---------------------	------	------	------	----	-------

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®]	1540-510	15 ³ / ₄ " × 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " × 7 ³ / ₄ "	. 200
Wood Wall FloodVENT [®]	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

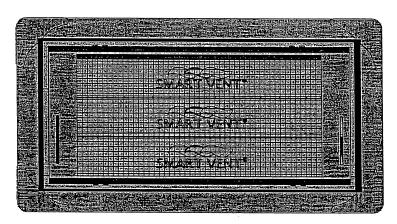


FIGURE 1-SMART VENT: MODEL 1540-510

Building Photographs

	For Insurance Company Use:		
Building Street Address (including Apt., Unit, Suite, and/or Bldg.) No. or P.O. Route and Box No. #21 North Douglass Avenue			Policy Number
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least two building photographs below according to the instructions for Item A6. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." If submitting more photographs than will fit on this page, use the Continuation Page on the reverse.





Front View – Date of Photograph: (11/05/2019)

Rear View – Date of Photograph: (11/05/2019)





Right Side View – Date of Photograph: (11/05/2019)

Left Side View – Date of Photograph: (11/05/2019)