U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATEImportant: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFOR	MATION		FOR INSUR	RANCE COMPANY USE
A1. Building Owner's Name CARMEN & JUNE PINTO			Policy Numb	per:
 A2. Building Street Address (including Apt., Unit, Suite, and/o Box No. 212 N. PEMBROKE AVENUE 	or Bldg. No.) or P.	O. Route and	Company N	AIC Number:
City MARGATE	State New Jersey		ZIP Code 08402	
A3. Property Description (Lot and Block Numbers, Tax Parce LOT 14, BLOCK 417	l Number, Legal	Description, etc.)		
A4. Building Use (e.g., Residential, Non-Residential, Addition	, Accessory, etc.) RESIDENTIAL		
A5. Latitude/Longitude: Lat. 32.32914 Long	74.51061	Horizontal Date	ım: NAD 1	927 × NAD 1983
A6. Attach at least 2 photographs of the building if the Certific	cate is being used	to obtain flood insu	ırançe.	
A7. Building Diagram Number7_				
A8. For a building with a crawlspace or enclosure(s):				
a) Square footage of crawlspace or enclosure(s)	94	6.50 sq ft		
b) Number of permanent flood openings in the crawlspace	e or enclosure(s)	within 1.0 foot abov	e adjacent gra	de 6
c) Total net area of flood openings in A8.b	1200.00 sq in			
d) Engineered flood openings? X Yes No				
A9. For a building with an attached garage:				
a) Square footage of attached garage	N/A sq ft			
b) Number of permanent flood openings in the attached of	garage within 1.0	foot above adjacent	grade N/A	
c) Total net area of flood openings in A9.b	N/A sq in			
d) Engineered flood openings? Yes X No				
SECTION B - FLOOD INSURA	1		IATION Z	1-207
B1. NFIP Community Name & Community Number CITY OF MARGATE 345304	B2. County Nar	ne		B3. State New Jersey
Number Date Eff		B. Flood B9.	Base Flood El (Zone AO, use	evation(s) e Base Flood Depth)
34001C0434 F 08-28-2018 08-28-		€ 8.0		
B10. Indicate the source of the Base Flood Elevation (BFE) d	ata or base flood	denth entered in Its	am RO	- 11 11 11 11
☐ FIS Profile ☑ FIRM ☐ Community Determined				
B11. Indicate elevation datum used for BFE in Item B9: N	IGVD 1929 🔀	NAVD 1988 🔲 (Other/Source:	
B12. Is the building located in a Coastal Barrier Resources S	ystem (CBRS) ar	ea or Otherwise Pro	tected Area (C	PA)? ☐ Yes ⊠ No
Designation Date: CBRS	ОРА			1 7 7 7 7

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corres	ponding information fr	om Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suit 212 N. PEMBROKE AVENUE	e, and/or Bldg. No.) or P	O. Route and Box No.	Policy Number:
City MARGATE	State New Jersey	ZIP Code 08402	Company NAIC Number
SECTION C – BUILI	DING ELEVATION INF	ORMATION (SURVEY RI	EQUIRED)
*A new Elevation Certificate will be required C2. Elevations – Zones A1–A30, AE, AH, A (which complete Items C2.a–h below according to Benchmark Utilized: LOCAL BENCH Indicate elevation datum used for the elevation	d when construction of the lith BFE), VE, V1–V30, Voor the building diagram sport vertical titions in items a) through	(with BFE), AR, AR/A, AR/ ecified in Item A7. In Puert Datum: NAVD 1988	'AE, AR/A1–A30, AR/AH, AR/AO.
		for the BFF	
a) Top of bottom floor (including basements) b) Top of the next higher floor c) Bottom of the lowest horizontal structural d) Attached garage (top of slab) e) Lowest elevation of machinery or equip (Describe type of equipment and location f) Lowest adjacent (finished) grade next to g) Highest adjacent (finished) grade next to h) Lowest adjacent grade at lowest elevate structural support SECTION D – SUR This certification is to be signed and sealed by a locatify that the information on this Certificate restatement may be punishable by fine or imprison. Were latitude and longitude in Section A provide	t, crawlspace, or enclosural member (V Zones only ment servicing the building in Comments) building (LAG) to building (HAG) to building (HAG) ton of deck or stairs, inclusive veryor, enginee to be served by a licensed land surveyor, end by a licensed land surveyor and by a licensed lan	uding DR ARCHITECT CERTIFIER or, or architect authorized by to interpret the data available, Section 1001. reveyor? Yes No	law to certify elevation information.
Certifier's Name HOWARD A. TRANSUE	License Num GS33451	ber	
Company Name SCHAEFFER NASSAR SCHEIDEGG, CE, LLC Address 1425 CANTILLON BOULEVARD City MAYS LANDING Signature Copy all pages of this Elevation Certificate and all Comments (including type of equipment and loc ITEM A8c VENTS ARE SMART VENTS MODE ITEM C2e IS THE A.C. PAD. PICTURES TAKEN 03/21/2022.	State New Jersey Date MARCH ZI, 20: attachments for (1) comme	nunity official, (2) insurance cable)	Place Seal Here 3/21/2022 Ext. agent/company, and (3) building owner.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/ 212 N. PEMBROKE AVENUE	or Bldg. No.) or P.O.	Route and Box No.	Policy Number:
	tate ew Jersey	ZIP Code 08402	Company NAIC Number
SECTION E – BUILDING ELE FOR ZONE	VATION INFORMA AO AND ZONE A	ATION (SURVEY NOT (WITHOUT BFE)	REQUIRED)
For Zones AO and A (without BFE), complete Items E1-complete Sections A, B, and C. For Items E1-E4, use na enter meters. E1. Provide elevation information for the following and of the highest adjacent grade (HAG) and the lowest ad a). Top of bottom floor (including basement, crawlspace, or enclosure) is b) Top of bottom floor (including basement, crawlspace, or enclosure) is E2. For Building Diagrams 6–9 with permanent flood op the next higher floor (elevation C2.b in the diagrams) of the building is E3. Attached garage (top of slab) is E4. Top of platform of machinery and/or equipment servicing the building is E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes SECTION F – PROPERTY OWN The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	the top of the bot No Unknown. ER (OR OWNER'S Fee who completes Sec.	ble. Check the measure ble boxes to show whether ble boxes to show whether feet mete bection A Items 8 and/or feet mete feet mete feet mete feet mete ttom floor elevated in act The local official must REPRESENTATIVE) Certions A B and F for 70	er the elevation is above or below ers
Property Owner or Owner's Authorized Representative's		Olis A, D, and E are co.	
Address	City	Si	tate ZIP Code
Signature	Date	Te	elephone
Comments			
			Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	esponding information f	rom Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, St 212 N. PEMBROKE AVENUE	uite, and/or Bldg. No.) or F	P.O. Route and Box No.	Policy Number:
City MARGATE	State New Jersey	ZIP Code 08402	Company NAIC Number
SECTIO	N G - COMMUNITY INF	ORMATION (OPTIONAL	1) 21-207
The local official who is authorized by law or on Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	Certificate. Complete the		nanagement ordinance can complete
G1. The information in Section C was take engineer, or architect who is authoriz data in the Comments area below.)			
G2. A community official completed Section Zone AO.	on E for a building located	d in Zone A (without a FE	MA-issued or community-issued BFE)
G3. The following information (Items G4–	G10) is provided for comr	munity floodplain manage	ement purposes.
G4. Permit Number	G5. Date Permit Issued	G6	Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:	New Construction S	ubstantial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	g basement)	fe	eet meters
G9. BFE or (in Zone AO) depth of flooding at t	the building site:	fe	eet meters Datum
G10. Community's design flood elevation:		fe	eet 🗌 meters Datum
Local Official's Name	Enlar time	Title (F)	L
Community Name MARCH 7	En (me fine	Telephone	622-1574
Signature <i>Q-Q</i>		Oate	3/23/22
Comments (including type of equipment and loc	cation, per C2(e), if application	able)	
			Check here if attachments.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.					FOR INSURANCE COMPANY US	SE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 212 N. PEMBROKE AVENUE					Policy Number:	
City		1	State	ZIP Code	Company NAIC Number	
MARGATE			New Jersey	08402		

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

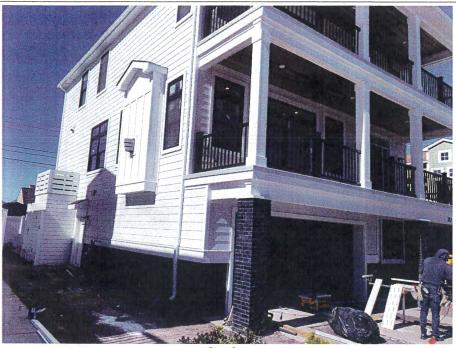


Photo One

Photo One Caption FRONT VIEW AND LEFT SIDE VIEW

21-207

Clear Photo One



Photo Two

Photo Two Caption FRONT VIEW AND RIGHT SIDE VIEW

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 212 N. PEMBROKE AVENUE			FOR INSURANCE COMPANY USE Policy Number:
MARGATE	New Jersey	08402	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption REAR VIEW

21-207

Clear Photo Three



Photo Four

Photo Four Caption SMART VENT MODEL 1540-520 TYPICAL OF 6

Clear Photo Four



ICC-ES Evaluation Report

ESR-2074

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2018, 2015, 2012, 2009 and 2006 International Residential Code[®] (IRC)
- 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

 † The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces.

Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square



feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent[®] FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. **5.2** The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised October 2017).
- **6.2** Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT[®] models and the Flood Vent Sealing Kit recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- **7.2** The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT [®]	1540-520	$15^3/_4$ " $\times 7^3/_4$ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

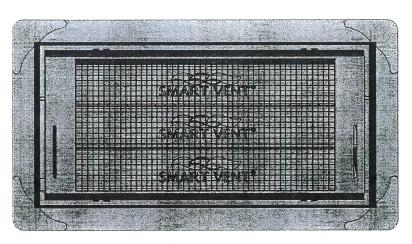


FIGURE 1-SMART VENT: MODEL 1540-510

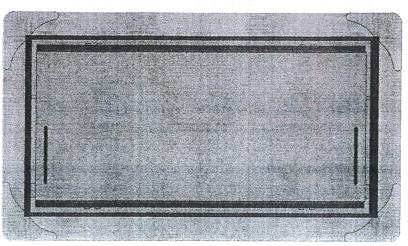


FIGURE 2—SMART VENT MODEL 1540-520

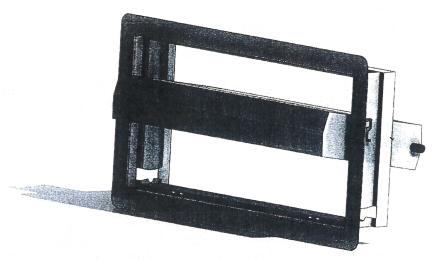


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

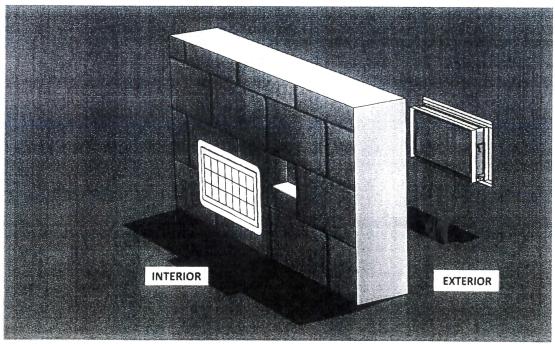


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code edition:

- 2016 California Building Code (CBC)
- 2016 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2016 CBC Chapter 12, provided the design and installation are in accordance with the 2015 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12, 16 and 16A, as applicable.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2016 CRC, provided the design and installation are in accordance with the 2015 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021.

