JU.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION			FOR INSUR	ANCE COMPANY USE	
A1. Building Owner's Name				Policy Numb	per:
The Keelan's					
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. #217 N. Brunswick Avenue				Company N	AIC Number:
City City of Margate		State New Jers	еу	ZIP Code 08402	
A3. Property Description (Lot and Block Numbers, Block 502.03 Lot 69	Tax Parce	l Number, Leg	al Description, et	c.)	
A4. Building Use (e.g., Residential, Non-Residentia	al, Addition	, Accessory, e	etc.) Residentia	al	
A5. Latitude/Longitude: Lat. 39.3369	Long. <u>-7</u>	74.4989	Horizonta	I Datum: 🔲 NAD 1	927 🗵 NAD 1983
A6. Attach at least 2 photographs of the building if	the Certific	ate is being u	sed to obtain floo	d insurance.	
A7. Building Diagram Number8_					
A8. For a building with a crawlspace or enclosure(s	s):				
a) Square footage of crawlspace or enclosure((s)		985.00 sq ft		
b) Number of permanent flood openings in the	crawlspace	e or enclosure	(s) within 1.0 foot	above adjacent gra	de <u>5</u>
c) Total net area of flood openings in A8.b	1	1000.00 sq in			
d) Engineered flood openings? 🛛 Yes] No				
A9. For a building with an attached garage:					
a) Square footage of attached garage0.00 sq ft					
b) Number of permanent flood openings in the	attached g	arage within	.0 foot above adj	acent grade 0	·
c) Total net area of flood openings in A9.b 0.00 sq in					
d) Engineered flood openings?] No				
SECTION B - FLOOI	DINSURA	NCE RATE	MAP (FIRM) INF	ORMATION	_
B1. NFIP Community Name & Community Number CITY OF MARGATE & 345304		B2. County			B3. State New Jersey
B4. Map/Panel B5. Suffix B6. FIRM Index Date	Eff	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)
34001C0453 F 08-28-2018	08-28-		AE	8	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:					
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:					
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:					
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🔲 Yes 🗵 No					
Designation Date: CBRS OPA					

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. #217 N. Brunswick Avenue	p. Policy Number:			
City State ZIP Code City of Margate New Jersey 08402	Company NAIC Number			
SECTION C - BUILDING ELEVATION INFORMATION (SURV	EY REQUIRED)			
C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete.				
C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a–h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: private Vertical Datum: NAVD88				
Indicate elevation datum used for the elevations in items a) through h) below.				
☐ NGVD 1929 🔀 NAVD 1988 ☐ Other/Source:				
Datum used for building elevations must be the same as that used for the BFE.	Check the measurement used.			
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	8.1 X feet meters			
b) Top of the next higher floor	12.1 X feet meters			
c) Bottom of the lowest horizontal structural member (V Zones only)	N/A X feet meters			
d) Attached garage (top of slab)	N/A			
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)	12.7 🔀 feet 🗌 meters			
f) Lowest adjacent (finished) grade next to building (LAG)	7.6 X feet meters			
g) Highest adjacent (finished) grade next to building (HAG)	8.1 X feet meters			
h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support	7.9 X feet meters			
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION				
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.				
Were latitude and longitude in Section A provided by a licensed land surveyor?	No X Check here if attachments.			
Certifier's Name License Number Paul M. Koelling, PLS, CFM NJ24GS 04328800				
Paul M. Koelling, PLS, CFM NJ24GS 04328800				
Professional Land Surveyor	Place			
Company Name Paul Koelling & Associates NJ C.O.A. 24GA28256300	Seal			
Address 2161 Shore Road sox-PHKsurvey@comcast.net	Here			
City State ZIP Code				
Linwood New Jersey 08221	· ·			
Signature Date Telephone (609) 927-0	Ext. 279			
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.				
Comments (including type of equipment and location, per C2(e), if applicable)				
*A8b.) Smart Vents Model #1540-510 engineered for 200 square inches of net area each				
***C2a.) crawlspace				
****C2e.) furnace (elev 12.7)water heater (elev 13.3)				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

MPORTANT: In these spaces, copy the corresponding information from Section A.		OR INSURANC	CE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and I #217 N. Brunswick Avenue	Box No. F	Policy Number:		
City State ZIP Code City of Margate New Jersey 08402	C	Company NAIC	Number	
SECTION E – BUILDING ELEVATION INFORMATION (SUF FOR ZONE AO AND ZONE A (WITHOUT		EQUIRED)		
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B,and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.				
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement,				
crawlspace, or enclosure) is fee b) Top of bottom floor (including basement,	et meters	above or	below the HAG.	
crawlspace, or enclosure) is fee E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Iter		<u></u>	below the LAG.	
the next higher floor (elevation C2.b in the diagrams) of the building is			below the HAG.	
E3. Attached garage (top of slab) is	et meters	above or	below the HAG.	
E4. Top of platform of machinery and/or equipment servicing the building is	et meters	above or	below the HAG.	
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance? Yes No Unknown. The local official must certify this information in Section G.				
SECTION F - PROPERTY OWNER (OR OWNER'S REPRESEN'	TATIVE) CER	TIFICATION		
The property owner or owner's authorized representative who completes Sections A, B, a	and E for Zone	A (without a F	EMA-issued or	
community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, ar Property Owner or Owner's Authorized Representative's Name	are corre		my knowledge.	
Topolity Cwitor of Cwitor of Authorized Representative's Name		•		
Address City	State	9	ZIP Code	
Signature Date	Tele	phone		
Comments				
		. .		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. #217 N. Brunswick Avenue			Policy Number:	
City	State	ZIP Code	Company NAIC Number	
City of Margate	New Jersey	08402	Simparity in the Hamber	
SECTION G - COMMUNITY INFORMATION (OPTIONAL)				
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.				
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)				
G2. A community official completed Section or Zone AO.	on E for a building located	d in Zone A (without a FEN	MA-issued or community-issued BFE)	
G3. The following information (Items G4–	G10) is provided for com	munity floodplain manager	ment purposes.	
G4. Permit Number	G5. Date Permit Issued	G6.	Date Certificate of Compliance/Occupancy Issued	
G7. This permit has been issued for: New Construction Substantial Improvement				
G8. Elevation of as-built lowest floor (including basement) of the building:				
G9. BFE or (in Zone AO) depth of flooding at t	G9. BFE or (in Zone AO) depth of flooding at the building site: feet meters			
G10. Community's design flood elevation: Local Official's Name Title Community Name Telephone Mallaga Date 11/ E/21				
Local Official's Name	in Calipatine	Title	CFM	
Community Name MANGA	[R	Telephone	609-822-1974	
Signature /		Date	609-822-1974	
Comments (including type of equipment and loc	cation, per C2(e), if applic	cable)	. ,	
			Check here if attachments.	



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2021 Revised 04/2021 This report is subject to renewal 02/2023.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:


SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

A Subsidiary of









ICC-ES Evaluation Report

ESR-2074

Reissued February 2021 Revised April 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021, 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

■ With a minimum of two openings on different sides of each enclosed area.



- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- **6.1** Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " × 7 ³ / ₄ "	- 200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
'Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

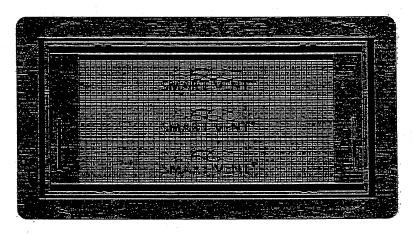


FIGURE 1-SMART VENT: MODEL 1540-510

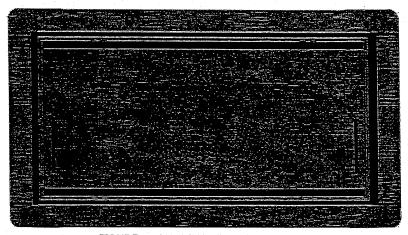


FIGURE 2—SMART VENT MODEL 1540-520

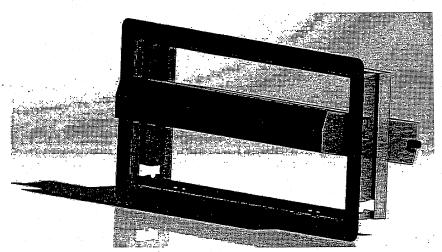


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

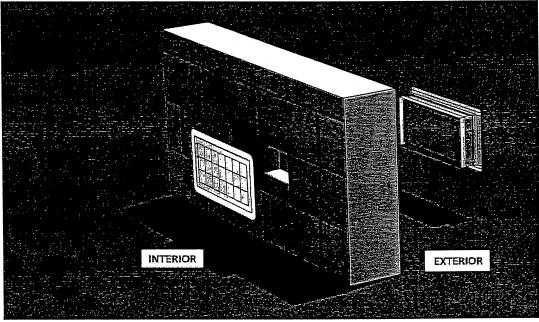


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2021 Revised April 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2021 and revised April 2021.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2021 Revised April 2021 This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the Florida Building Code—Building and the Florida Building Code-Residential, provided the design requirements are determined in accordance with the Florida Building Code-Building or the Florida Building Code-Residential, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 International Building Code® meet the requirements of the Florida Building Code-Building or the Florida Building Code-Residential, as applicable.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the Florida Building Code—Building and the Florida Building Code—Residential.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2021 and revised April 2021.



Building Photographs

	For Insurance Company Use:		
Building Street Address (including Apt., Unit, Suite, and/or Bldg.) No. or P.O. Route and Box No. #217 N. Brunswick Avenue			Policy Number
City	State	ZIP Code	Company NAIC Number
Margate	NJ	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least two building photographs below according to the instructions for Item A6. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." If submitting more photographs than will fit on this page, use the Continuation Page on the reverse.





Front View – Date of Photograph: (See Photo Stamp)

Rear View – Date of Photograph: (See Photo Stamp)





Vent View – Date of Photograph: (See Photo Stamp)

Left Side View – Date of Photograph: (See Photo Stamp)