U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION					FOR INSUF	RANCE COMPANY USE	
A1. Building Owner's Name					Policy Num	oer:	
	Ben Chapman						
Box No.	A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company Box No. 6 N Clermont Avenue					Company N	AIC Number:
City Margate City					ZIP Code 08402		
	A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) Block 204.02 Lot 21						
A4. Building Use (e	A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) Residential						
A5. Latitude/Longitu	ude: Lat. <u>N</u>	39°20'09.7"	Long. V	V 74°30'06.3"	Horizonta	l Datum: 🔲 NAD 1	927 🔀 NAD 1983
A6. Attach at least	2 photograp	hs of the building if the	e Certific	ate is being ι	used to obtain floo	d insurance.	
A7. Building Diagra	m Number						
A8. For a building w	vith a crawls	pace or enclosure(s):					
a) Square foota	age of crawl	space or enclosure(s)			562.00 sq ft		
b) Number of po	ermanent flo	ood openings in the cr	awlspace	e or enclosure	e(s) within 1.0 foot	above adjacent gra	de 5
c) Total net are	a of flood op	enings in A8.b	1	000.00 sq in	l		
d) Engineered	flood openin	gs? ⊠Yes □N	10		,		
A9. For a building wi	ith an attach	ed garage:					
a) Square foota	a) Square footage of attached garage N/A sq ft						
b) Number of pe	ermanent flo	od openings in the att	tached g	arage within	1.0 foot above adj	acent grade N/A	
		enings in A9.b	Ū	N/A sq			
			lo.				
d) Engineered flood openings? Yes No							
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION							
B1. NFIP Community Margate City 34530		ommunity Number		B2. County Atlantic	Name		B3. State New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood El (Zone AO, use	evation(s) Base Flood Depth)
34001C 0453	F	08-28-2018	08-28-2		AE	10.00	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:							
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No							
Designation Date: CBRS DPA							

OMB No. 1660-0008 **ELEVATION CERTIFICATE** Expiration Date: November 30, 2022 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 6 N Clermont Avenue State ZIP Code Company NAIC Number Margate City **New Jersey** 08402 SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED) C1. Building elevations are based on: Construction Drawings* ☐ Building Under Construction* X Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations - Zones A1-A30, AE, AH, A (with BFE), VE, V1-V30, V (with BFE), AR, AR/A, AR/AE, AR/A1-A30, AR/AH, AR/AO. Complete Items C2.a-h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: Local Vertical Datum: NAVD 1988 Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929
☐ NAVD 1988
☐ Other/Source: Datum used for building elevations must be the same as that used for the BFE. Check the measurement used. 7.0 X feet a) Top of bottom floor (including basement, crawlspace, or enclosure floor) meters 16.0 X feet b) Top of the next higher floor meters N/A feet c) Bottom of the lowest horizontal structural member (V Zones only) meters N/A feet d) Attached garage (top of slab) meters e) Lowest elevation of machinery or equipment servicing the building 16.0 meters (Describe type of equipment and location in Comments) 6.8 ☐ meters f) Lowest adjacent (finished) grade next to building (LAG) 6.9 X feet g) Highest adjacent (finished) grade next to building (HAG) meters h) Lowest adjacent grade at lowest elevation of deck or stairs, including 6.8 X feet structural support meters SECTION D - SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor? Check here if attachments. Certifier's Name License Number James R. Boney, PLS 24GS03126400 Title Professional Land Surveyor Place Company Name Seal James R. Boney & Associates Address Here 13 Stone Mill Court City State ZIP Code Egg Harbor Twp New Jersey 08234 Signature Date Telephone Fxt. 06-05-2022 (609) 788-8013 Copy all pages of this Elevation n Certificate(and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner. Comments (including type of equipment and location, per C2(e), if applicable) Two story dwelling. A/C units outside on platform. All other mechanicals inside at or above C2b.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the correspondi	FOR INSURANCE COMPANY USE				
Building Street Address (including Apt., Unit, Suite, and 6 N Clermont Avenue	/or Bldg. No.) or P.O.	Route and Box No.	Policy Number:		
	State New Jersey	ZIP Code 08402	Company NAIC Number		
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)					
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters. E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement,					
crawlspace, or enclosure) is b) Top of bottom floor (including basement, crawlspace, or enclosure) is					
 E2. For Building Diagrams 6–9 with permanent flood of the next higher floor (elevation C2.b in the diagrams) of the building is E3. Attached garage (top of slab) is E4. Top of platform of machinery and/or equipment servicing the building is 			s above or below the HAG. s above or below the HAG. s above or below the HAG.		
E5. Zone AO only: If no flood depth number is available floodplain management ordinance? Yes			cordance with the community's certify this information in Section G.		
SECTION F - PROPERTY OWN	ER (OR OWNER'S F	REPRESENTATIVE) CE	RTIFICATION		
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	e who completes Sec e statements in Secti	tions A, B, and E for Zo ons A. B. and E are con	ne A (without a FEMA-issued or rect to the best of my knowledge.		
Property Owner or Owner's Authorized Representative's					
Address	City	Sta	ate ZIP Code		
Signature	Date	Tel	ephone		
Comments					
			Chook hows if the thrown it		
			Check here if attachments.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corre	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 6 N Clermont Avenue				
		777 0 1	<u> </u>	
City Margate City	State New Jersey	ZIP Code 08402	Company NAIC Number	
SECTIO	ON G - COMMUNITY INF	FORMATION (OPTIONAL	_)	
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.				
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)				
G2. A community official completed Section Zone AO.	on E for a building locate	d in Zone A (without a FE	MA-issued or community-issued BFE)	
G3. The following information (Items G4–	G10) is provided for com	munity floodplain manage	ment purposes.	
G4. Permit Number	G5. Date Permit Issued	d G6.	. Date Certificate of Compliance/Occupancy Issued	
G7. This permit has been issued for:	New Construction S	Substantial Improvement		
G8. Elevation of as-built lowest floor (including of the building:	j basement)		eet meters Datum	
G9. BFE or (in Zone AO) depth of flooding at t	he building site:		eet meters Datum	
G10. Community's design flood elevation:			eet meters Datum	
Local Official's Name	Er lactin	Title C /	-m	
Community Name	in landing	Telephone 60	05822-199×	
Signature	a	Date	6/13/2	
Comments (including type of equipment and loc	ation, per C2(e), if applic	able)		
			☐ Check here if attachments.	

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, cop	FOR INSURANCE COMPANY USE		
Building Street Address (including A	Policy Number:		
6 N Clermont Avenue			
City	State	ZIP Code	Company NAIC Number
Margate City	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption Front 06-01-22

Clear Photo One



Photo Two Caption Rear 06-01-22

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including 6 N Clermont Avenue	Policy Number:		
City	State	ZIP Code	Company NAIC Number
Margate City	New Jersey	08402	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three Caption Smart Vent Model 1540-510 (one of five) 06-01-22

Clear Photo Three

Photo Four

Photo Four Caption

Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2021 Revised 04/2021 This report is subject to renewal 02/2023.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



fically

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.



Copyright © 2021 ICC Evaluation Service, LLC. All rights reserved.



ICC-ES Evaluation Report

ESR-2074

Reissued February 2021 Revised April 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- **2021**, 2018, 2015, 2012, 2009 and 2006 *International* Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021, 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with $\frac{1}{4}$ -inch-by- $\frac{1}{4}$ -inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

With a minimum of two openings on different sides of each enclosed area.

- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM F283

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- **7.2** The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

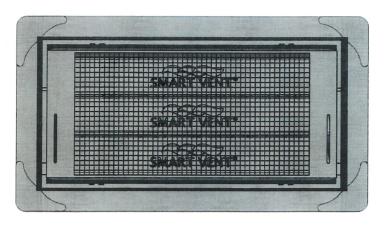


FIGURE 1-SMART VENT: MODEL 1540-510

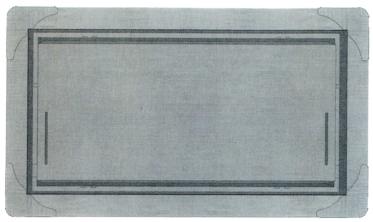


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

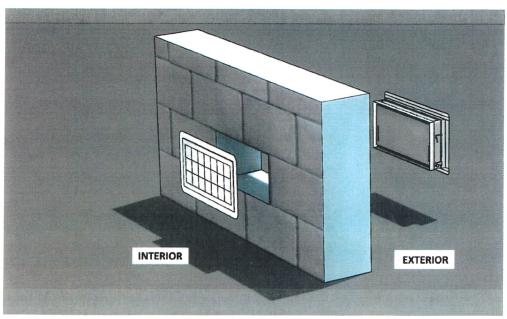


FIGURE 4—FLOOD VENT SEALING KIT