## U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008

Expiration Date: November 30, 2018

# **ELEVATION CERTIFICATE**

**Important:** Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

					RANCE COMPANY USE		
A1. Building Owner's Name						Policy Numl	ber:
Lewis Roden and D				- DI-L - N- ) D O	D1		
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.					Company N	AIC Number:	
#8 North Brunswick	Avenue						
City CITY OF MARG	SATE			State New Jersey		ZIP Code 08402	
		nd Block Numbers, Tax	Parce		scription etc.)		
Block 203 Lot 22		a block Numbers, Tax					
A4. Building Use (	A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.) RESIDENTIAL						
A5. Latitude/Longit	ude: Lat. 39	.3326	_ong. <u>-</u> 7	74.4953	Horizontal Datur	n: 🗌 NAD 1	927 X NAD 1983
A6. Attach at least	2 photograph	ns of the building if the	Certific	ate is being used to	o obtain flood insur	ance.	
A7. Building Diagra	m Number _	7					
A8. For a building v	with a crawlsp	pace or enclosure(s):					
a) Square foot	age of crawls	space or enclosure(s)		928 sq ft			
b) Number of p	permanent flo	od openings in the cra	wlspac	e or enclosure(s) w	ithin 1.0 foot above	adjacent gr	ade5
c) Total net are	ea of flood op	enings in A8.b1,0	00 s	q in			
d) Engineered	d) Engineered flood openings? 🗵 Yes 🗌 No						
A9. For a building with an attached garage:							
a) Square footage of attached garage sq ft							
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 0							
c) Total net are	c) Total net area of flood openings in A9.b 0 sq in						
d) Engineered	flood opening	gs? ☐ Yes ☒ N	o '	•			
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION							
B1. NFIP Communi	•	*		B2. County Name			B3. State
CITY OF MARGATE & 345304 ATLANTIC COUNTY New Jersey							
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date		IRM Panel ffective/	B8. Flood Zone(s	) B9. Bas (Zo	se Flood Elevation(s) ne AO, use Base
345304/0001	C	10/18/1983		evised Date //1983	A8**		od Depth)
			<u> </u>				
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:							
B11. Indicate elevation datum used for BFE in Item B9: X NGVD 1929 NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)?   Yes  No							
Designation Date: CBRS OPA							
	-			_			
1							

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. #8 North Brunswick Avenue	Policy Number:	
City State ZIP Code CITY OF MARGATE New Jersey 08402	Company NAIC Number	
SECTION C – BUILDING ELEVATION INFORMATION (SURVEY	REQUIRED)	
C1. Building elevations are based on: Construction Drawings* Building Under Cons	truction* X Finished Construction	
*A new Elevation Certificate will be required when construction of the building is complete.	_	
C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, A Complete Items C2.a–h below according to the building diagram specified in Item A7. In Pu	R/AE, AR/A1–A30, AR/AH, AR/AO. erto Rico only, enter meters.	
Benchmark Utilized: private Vertical Datum: NGVD29	<del></del>	
Indicate elevation datum used for the elevations in items a) through h) below.		
■ NGVD 1929       ■ NAVD 1988       ■ Other/Source:		
Datum used for building elevations must be the same as that used for the BFE.	Check the measurement used.	
a) Top of bottom floor (including basement, crawlspace, or enclosure floor)8. 1		
	X feet meters	
c) Bottom of the lowest horizontal structural member (V Zones only)  M/A  N/A  N/A		
14.2		
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)		
f) Lowest adjacent (finished) grade next to building (LAG)7. 7	X feet  meters	
g) Highest adjacent (finished) grade next to building (HAG)8. 1_	🔀 feet 🗌 meters	
h) Lowest adjacent grade at lowest elevation of deck or stairs, including7. 4_structural support	X feet meters	
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERT	FICATION	
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized I certify that the information on this Certificate represents my best efforts to interpret the data avestatement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.	by law to certify elevation information.	
Were latitude and longitude in Section A provided by a licensed land surveyor? ⊠Yes ☐ No	★ Check here if attachments.	
Certifier's Name License Number		
Paul M. Koelling, PLS, CFM NJ24GS 04328800		
Paul M. Koelling, PLS, CFM NJ24GS 04328800  Title Licensed Land Surveyor		
Title Licensed Land Surveyor Company Name	Place Seal	
Title Licensed Land Surveyor  Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300	Place Seal Here	
Title Licensed Land Surveyor Company Name	Seal	
Title Licensed Land Surveyor  Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300  Address	Seal	
Title Licensed Land Surveyor  Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300  Address 2161 Shore Road  City State ZIP Code	Seal Here	
Title Licensed Land Surveyor  Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300  Address 2161 Shore Road  City State ZIP Code Linwood New Jersey 08221  Signature Date Telephone	Seal Here	
Title Licensed Land Surveyor  Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300  Address 2161 Shore Road  City Linwood  Signature  Signature  Signature  Signature  Signature  Date  Telephone (609) 927-0275	Seal Here	
Title Licensed Land Surveyor  Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300  Address 2161 Shore Road  City State ZIP Code Linwood New Jersey 08221  Signature Date Telephone (609) 927-0279  Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance Comments (including type of equipment and location, per C2(e), if applicable)	Seal Here  Here	
Title Licensed Land Surveyor  Company Name Paul Koelling & Associates, LLC NJ C.O.A. No. 24GA28256300  Address 2161 Shore Road  City State ZIP Code Linwood New Jersey 08221  Signature Date Telephone (609) 927-0279  Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance Comments (including type of equipment and location, per C2(e), if applicable) *A8b.) Smart Vents Model #1540-510 engineered for 200 square inches of net area each	Seal Here	

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008

Expiration Date: November 30, 2018 IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: #8 North Brunswick Avenue City State ZIP Code Company NAIC Number CITY OF MARGATE New Jersey 08402 SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE) For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters. E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement. crawlspace, or enclosure) is feet meters above or below the HAG. b) Top of bottom floor (including basement, crawlspace, or enclosure) is feet meters above or below the LAG. E2. For Building Diagrams 6-9 with permanent flood openings provided in Section A Items 8 and/or 9 (see pages 1-2 of Instructions), the next higher floor (elevation C2.b in the diagrams) of the building is feet meters above or below the HAG. E3. Attached garage (top of slab) is feet meters above or below the HAG. E4. Top of platform of machinery and/or equipment servicing the building is \_ ☐ feet ☐ meters ☐ above or ☐ below the HAG. E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's SECTION F - PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge. Property Owner or Owner's Authorized Representative's Name Address City State ZIP Code Signature Date Telephone Comments Check here if attachments.

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corr				FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S #8 North Brunswick Avenue	uite, and/or Bldg. No.)	or P.O. Route and Box		Policy Number:
CITY OF MARGATE	State New Jersey	ZIP Code 08402		Company NAIC Number
SECTION	ON G - COMMUNITY	INFORMATION (OPTIC	DNAL)	
The local official who is authorized by law or or Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, en	L'UERTITICATE COMPLETE	the community's floodpl the applicable item(s) a	lain mana and sign t	agement ordinance can complete pelow. Check the measurement
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)	en from other docume ed by law to certify ele	ntation that has been signation information. (Indi	gned and icate the	sealed by a licensed surveyor, source and date of the elevation
G2. A community official completed Secti or Zone AO.				
G3. The following information (Items G4–	G10) is provided for c	ommunity floodplain ma	ınagemer	nt purposes.
G4. Permit Number	G5. Date Permit Iss	ued	G6. Da	ate Certificate of mpliance/Occupancy Issued
G7. This permit has been issued for:	New Construction	] Substantial Improvem	ent	
G8. Elevation of as-built lowest floor (including of the building:	g basement)	[	feet [	meters Datum
G9. BFE or (in Zone AO) depth of flooding at t	he building site:	[	feet [	meters Datum
G10. Community's design flood elevation:		[	feet [	meters Datum
Local Official's Name	lartin	Title	FM	
Community Name  Mana	MIC	Telephone	09.	822.1974
Signature		Date	130/	,
Comments (including type of equipment and loc	ation, per C2(e), if app	plicable)		
				Check here if attachments.

# **Building Photographs**

	See Instructions for Iten	n A6.	For Insurance Company Use:
Building Street Address (including #8 North Brunswick Av	ng Apt., Unit, Suite, and/or Bldg.) No. or P.O <b>/enue</b>	. Route and Box No.	Policy Number
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least two building photographs below according to the instructions for Item A6. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." If submitting more photographs than will fit on this page, use the Continuation Page on the reverse.





Front View – Date of Photograph: (See Photo Stamp)


Rear View – Date of Photograph: (See Photo Stamp)





Right Side View – Date of Photograph: (See Photo Stamp)

Left Side View – Date of Photograph: (See Photo Stamp)

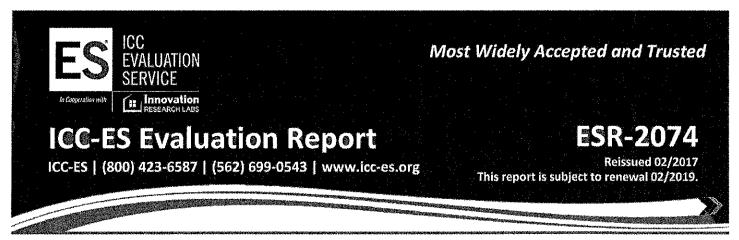

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

## REPORT HOLDER:

## SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071

## **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





## **ICC-ES Evaluation Report**

## **ESR-2074**

Reissued February 2017 Revised November 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

#### REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)<sup>†</sup>

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

## 3.0 DESCRIPTION

## 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water,

the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

## 4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be



installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.

- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

## 5.0 CONDITIONS OF USE

The Smart Vent<sup>®</sup> FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

## 6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

## 7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup>	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT <sup>®</sup> Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT <sup>®</sup> Stacker	1540-511	16" X 16"	400
FloodVent <sup>®</sup> Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>

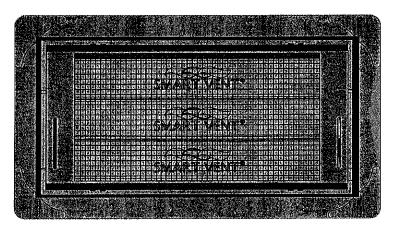


FIGURE 1—SMART VENT: MODEL 1540-510

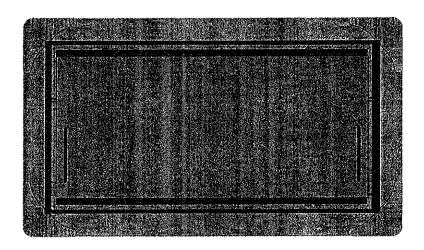


FIGURE 2—SMART VENT MODEL 1540-520

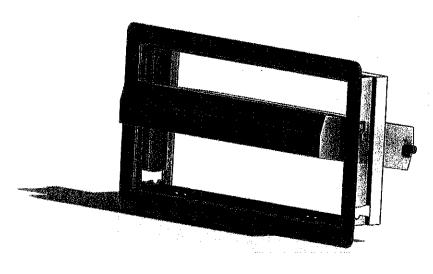


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN