U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

	SEC	TION A - PROPERT	Y INFOR	RMATION		FOR INSUF	RANCE COMPANY USE
A1. Building Owner's Name					Policy Num	ber:	
Ben Chapman Development							
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 104 S. Essex Avenue Company NAIC Number:						AIC Number:	
City				State		ZIP Code	
Margate				New Jer	-	08402	
A3. Property Desc Block 5.02, Lot 11	cription (Lot a	and Block Numbers, Ta	ax Parce	l Number, Le	gal Description, e	tc.)	
A4. Building Use	e.g., Reside	ntial, Non-Residential,	Addition	, Accessory,	etc.) Residenti	al	
A5. Latitude/Long	tude: Lat. <u>N</u>	l39°19'45.7"	Long. V	V74°29'45.9"	Horizonta	al Datum: 🔲 NAD 1	1927 🔀 NAD 1983
A6. Attach at leas	t 2 photograp	ohs of the building if th	e Certific	cate is being ı	used to obtain floc	od insurance.	
A7. Building Diagr	am Number	7					
A8. For a building	with a crawls	space or enclosure(s):					
a) Square foo	tage of craw	lspace or enclosure(s)	1		810.00 sq ft		
b) Number of	permanent fl	ood openings in the cr	awlspac	e or enclosur	 e(s) within 1.0 foo	t above adjacent gra	ide 7
1				1400.00 sq ir		, .	
d) Engineered	I flood openir	ngs? 🗵 Yes 🗌 N		•			
A9. For a building v							
				0.00 sq ft			
a) Square foot						Sanandania da O	
		ood openings in the at	tacned g			acent grade U	
		penings in A9.b		0.00 sq	in		
d) Engineered	flood openin	gs? 🗌 Yes 🛂 N	lo				
	SE	ECTION B - FLOOD I	NSURA	NCE RATE	MAP (FIRM) INF	ORMATION	
B1. NFIP Commun		Community Number		B2. County			B3. State
Margate 345304	,			Atlantic	T T G T T T T T T T T T T T T T T T T T		New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	I RM Panel ective/	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	 evation(s) e Base Flood Depth)
34001C453	F	08-28-2018	Rev 08-28-2	vised Date 2018	AE	10.0	
B10. Indicate the s	ource of the	Base Flood Elevation	(BFE) da	ata or base flo	ood depth entered	in Item B9:	
☐ FIS Profile	⊋ FIRM	Community Deterr	mined [Other/Sou	rce:		
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:							
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🔀 No							
Designation Date: CBRS OPA							
-				land - · · ·			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

				FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/ 104 S. Essex Avenue	or Bldg. No.) or P.O. Ro	oute and Box No.	Policy N	Number:	
		P Code 402	Compa	ny NAIC Number	
SECTION C – BUILDING E	LEVATION INFORMA	TION (SURVEY R	EQUIREI	 D)	
C1. Building elevations are based on: Construct *A new Elevation Certificate will be required when C2. Elevations – Zones A1–A30, AE, AH, A (with BFE Complete Items C2.a–h below according to the building	construction of the build), VE, V1–V30, V (with	BFE), AR, AR/A, AR/	'AE, AR/A		
Benchmark Utilized: Local BM	Vertical Datum	**************************************			
Indicate elevation datum used for the elevations in ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other Datum used for building elevations must be the sa	-/Source:		Ol		
a) Top of bottom floor (including basement, crawls)	space, or enclosure floo	r)		ck the measurement used. ⊠ feet	
b) Top of the next higher floor	, , , , , , , , , , , , , , , , , , , ,	.,		☐ ☐ meters	
c) Bottom of the lowest horizontal structural memb	per (V Zones only)		N/A	feet meters	
d) Attached garage (top of slab)	` ',	•	N/A		
e) Lowest elevation of machinery or equipment se (Describe type of equipment and location in Co	ervicing the building mments)		18.1		
f) Lowest adjacent (finished) grade next to buildir	g (LAG)		8.1		
g) Highest adjacent (finished) grade next to buildi	ng (HAG)		8.5		
 h) Lowest adjacent grade at lowest elevation of de structural support 	eck or stairs, including		8.1	☑ feet ☐ meters	
SECTION D - SURVEYOR	R, ENGINEER, OR AR	CHITECT CERTIF	CATION		
This certification is to be signed and sealed by a land s I certify that the information on this Certificate represen statement may be punishable by fine or imprisonment u	ts my best efforts to inte	erpret the data availa	law to ce	ertify elevation information. derstand that any false	
Were latitude and longitude in Section A provided by a	licensed land surveyor?	Yes □ No	□c	heck here if attachments.	
Certifier's Name James R. Boney, PLS	License Number 24GS03126400				
Title					
Professional Land Surveyor				Place	
Company Name James R. Boney & Assoc.			·	Seal	
Address 13 Stone Mill Court				Here	
City Egg Harbor Township	State New Jersey	ZIP Code 08234	;		
Signature Amhry	Date 03-30-2023	Telephone (609) 788-8013	Ext.		
Copy all pages of this Elevation Certificate and all attachm	ents for (1) community o	fficial, (2) insurance a	gent/com	pany, and (3) building owner.	
Comments (including type of equipment and location, per 2.5 story frame dwelling. There are two (2) A/C units out finished floor.		m. All other Mechani	icals are i	inside and at or above the	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding			FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/o 104 S. Essex Avenue	or Bldg. No.) or P.O. Ro	ute and Box No.	Policy Number:		
1 7		Code 402	Company NAIC Number		
SECTION E – BUILDING ELE FOR ZONE	EVATION INFORMATION AO AND ZONE A (WI		REQUIRED)		
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B,and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.					
 E1. Provide elevation information for the following and c the highest adjacent grade (HAG) and the lowest ad a) Top of bottom floor (including basement, 		xes to show whethe	r the elevation is above or below		
crawlspace, or enclosure) is b) Top of bottom floor (including basement,		feet meter	rs		
crawlspace, or enclosure) is		feet meter	rs above or below the LAG.		
E2. For Building Diagrams 6–9 with permanent flood oper the next higher floor (elevation C2.b in the diagrams) of the building is	enings provided in Secti	ion A Items 8 and/or			
E3. Attached garage (top of slab) is		☐ feet ☐ meter			
E4. Top of platform of machinery and/or equipment servicing the building is		☐ feet ☐ meter			
E5. Zone AO only: If no flood depth number is available,		n floor elevated in ac			
SECTION F - PROPERTY OWNE	ER (OR OWNER'S REF	RESENTATIVE) CE	ERTIFICATION		
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	who completes Sections statements in Sections	ns A, B, and E for Zo A, B, and E are cor	ne A (without a FEMA-issued or rect to the best of my knowledge.		
Property Owner or Owner's Authorized Representative's	Name				
Address	City	Sta	ate ZIP Code		
Signature	Date	Te	lephone		
Comments					
			☐ Check here if attachments.		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY US	3E	
Building Street Address (including Apt., Unit, Suite, and/or 104 S. Essex Avenue	Bldg. No.) or P.O. Route and Box	No. Policy Number:	
City Star Margate New	te ZIP Code v Jersey 08402	Company NAIC Number	
SECTION G - CO	MMUNITY INFORMATION (OPTIC	DNAL)	Internation
The local official who is authorized by law or ordinance to Sections A, B, C (or E), and G of this Elevation Certificate used in Items G8–G10. In Puerto Rico only, enter meters.	. Complete the applicable item(s) a		
G1. The information in Section C was taken from oth engineer, or architect who is authorized by law to data in the Comments area below.)			
G2. A community official completed Section E for a lor Zone AO.	ouilding located in Zone A (without	a FEMA-issued or community-issued BFE)	١
G3. The following information (Items G4–G10) is pro	ovided for community floodplain ma	anagement purposes.	
G4. Permit Number G5. Date	Permit Issued	G6. Date Certificate of Compliance/Occupancy Issued	
G7. This permit has been issued for:	struction Substantial Improvem	pent	
G8. Elevation of as-built lowest floor (including basement of the building:		☐ feet ☐ meters Datum	_
G9. BFE or (in Zone AO) depth of flooding at the building	site:	feet meters Datum	-
G10. Community's design flood elevation:		☐ feet ☐ meters Datum	-
Local Official's Name	Title	CFM	
Community Name	Telephone 1	609-622.1974	
Signature	Date	5/4/27	
Comments (including type of equipment and location, per	C2(e), if applicable)	, . ,	
		Check here if attachments	3.

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy th	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., I	Policy Number:		
104 S. Essex Avenue			
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One Caption Front Clear Photo One



Photo Two Caption Rear

Clear Photo Two

Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Ap	Policy Number:		
104 S. Essex Avenue			
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption SMART Vent (typical)

Clear Photo Three

Photo Four

Photo Four Caption Garage 10-09-21

Clear Photo Four
Form Page 6 of 6



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2021 Revised 04/2021 This report is subject to renewal 02/2023.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence" A Subsidiary of CODE COUNCIL

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2021 Revised April 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43-Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code[®] (IRC)
- 2021, 2018 International Energy Conservation Code[®] (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

With a minimum of two openings on different sides of each enclosed area.

- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. **5.2** The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368

www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)	
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200	
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200	
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200	
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200	
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200	
SmartVENT® Stacker	1540-511	16" X 16"	400	
FloodVent® Stacker	1540-521	16" X 16"	400	

For SI: 1 inch = 25.4 mm; 1 square foot = m²

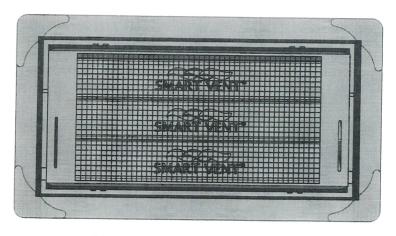


FIGURE 1—SMART VENT: MODEL 1540-510

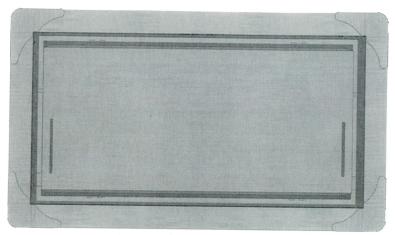


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

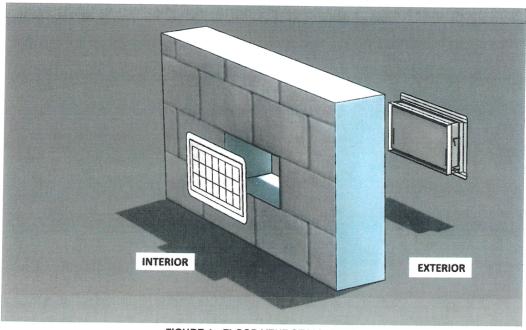


FIGURE 4—FLOOD VENT SEALING KIT