U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATEImportant: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A – PROPERTY INFORMATION				FOR INSUF	RANCE COMPANY USE
A1. Building Owner's Name Daniel Schwartz and Rachel D, Schwartz				Policy Num	ber:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 106 N. Jasper Avenue				Company N	IAIC Number:
City State Margate New Jersey				ZIP Code 08402	
A3. Property Description (Lot and Block Nu Block 312.01, Lot 10.01	mbers, Tax Parce	el Number, Le	gal Description, e	tc.)	
A4. Building Use (e.g., Residential, Non-Re	sidential, Additior	n, Accessory,	etc.) Residenti	al	
A5. Latitude/Longitude: Lat. 39° 19' 48.4"	V Long.	74° 30' 17.2" V	V Horizonta	al Datum: 🔲 NAD 1	1927 🔀 NAD 1983
A6. Attach at least 2 photographs of the bu	Iding if the Certifi	cate is being ı	used to obtain floo	od insurance.	
A7. Building Diagram Number7					
A8. For a building with a crawlspace or enc	osure(s):				
a) Square footage of crawlspace or en	closure(s)		500.00 sq ft		
b) Number of permanent flood opening	s in the crawlspac	e or enclosur	e(s) within 1.0 foo	t above adjacent gra	ade 3
c) Total net area of flood openings in A	8.b	600.00 sq ir	1		
d) Engineered flood openings? 🛛 χ	es 🗌 No				
A9. For a building with an attached garage:					
a) Square footage of attached garage		00.00 sq ff			
b) Number of permanent flood opening	s in the attached o	garage within	1.0 foot above ad	jacent grade 0	
c) Total net area of flood openings in A	9.b	00.00 sq	in		
d) Engineered flood openings?	es 🗵 No	•			
SECTION B -	FLOOD INSURA	NCE RATE	MAP (FIRM) INF	ORMATION	
B1. NFIP Community Name & Community N Margate City 345304	umber	B2. County Atlantic	Name		B3. State New Jersey
B4. Map/Panel B5. Suffix B6. FIRM Date	Eff	RM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)
34001C0434 F 08-28-2018			AE	9.00'	
B10. Indicate the source of the Base Flood	Elevation (BFE) d	ata or base fl	ood depth entered	d in Item B9:	
☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:					
B11. Indicate elevation datum used for BFE	in Item B9: 🔲 N	IGVD 1929	☑ NAVD 1988	Other/Source:	
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No					
Designation Date: CBRS OPA					

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 106 N. Jasper Avenue	Policy Number:			
CityStateZIP CodeMargateNew Jersey08402	Company NAIC Number			
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY	REQUIRED)			
 C1. Building elevations are based on: Construction Drawings* Building Under Construction* Finished Construction *A new Elevation Certificate will be required when construction of the building is complete. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, AR/AE, AR/A1–A30, AR/AH, AR/AO. Complete Items C2.a–h below according to the building diagram specified in Item A7. In Puerto Rico only, enter meters. Benchmark Utilized: Local Vertical Datum: NAVD 1988 				
Indicate elevation datum used for the elevations in items a) through h) below.				
□ NGVD 1929 ☑ NAVD 1988 □ Other/Source: Datum used for building elevations must be the same as that used for the BFE. a) Top of bottom floor (including basement, crawlspace, or enclosure floor)	Check the measurement used. 6.1			
b) Top of the next higher floor	15.0 🔀 feet 🗌 meters			
c) Bottom of the lowest horizontal structural member (V Zones only)	N/A ⊠ feet ☐ meters			
d) Attached garage (top of slab)	6.0 🛭 feet 🗌 meters			
e) Lowest elevation of machinery or equipment servicing the building (Describe type of equipment and location in Comments)	12.1 🔀 feet 🗌 meters			
f) Lowest adjacent (finished) grade next to building (LAG)	5.8 🔀 feet 🗌 meters			
g) Highest adjacent (finished) grade next to building (HAG)	5.9 🔀 feet 🗌 meters			
h) Lowest adjacent grade at lowest elevation of deck or stairs, including structural support	5.9 🛛 feet 🔲 meters			
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERT	FICATION			
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor?				
Certifier's Name License Number Thomas A. Prendergast GS37604				
Title Professional Land Surveyor	Place			
Company Name Prendergast & Associates, LLC	Thans Attacky at			
Address 318 Discovery Lane	Here/			
City State ZIP Code Egg Harbor Township New Jersey 08234				
Signature Date Telephone 12-20-2021 (609) 653-2047				
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance	e agent/company, and (3) building owner.			
Comments (including type of equipment and location, per C2(e), if applicable) C2.(e) Mechanicals in Garage 12.10'				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from	FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. 106 N. Jasper Avenue	Route and Box No.	Policy Number:
	ZIP Code 08402	Company NAIC Number
SECTION E – BUILDING ELEVATION INFORMA FOR ZONE AO AND ZONE A (REQUIRED)
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate i complete Sections A, B,and C. For Items E1–E4, use natural grade, if available enter meters.		
 E1. Provide elevation information for the following and check the appropriate the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement, crawlspace, or enclosure) is 		
b) Top of bottom floor (including basement, crawlspace, or enclosure) is		
E2. For Building Diagrams 6–9 with permanent flood openings provided in Se the next higher floor (elevation C2.b in the diagrams) of the building is	ection A Items 8 and/or	
E3. Attached garage (top of slab) is		
E4. Top of platform of machinery and/or equipment servicing the building is		s 🔲 above or 🔲 below the HAG.
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floodplain management ordinance? Yes No Unknown.	om floor elevated in ac The local official must	cordance with the community's certify this information in Section G.
SECTION F - PROPERTY OWNER (OR OWNER'S R	EPRESENTATIVE) CE	RTIFICATION
The property owner or owner's authorized representative who completes Sect	tions A, B, and E for Zo	ne A (without a FEMA-issued or
community-issued BFE) or Zone AO must sign here. The statements in Section	ons A, B, and E are cor	rect to the best of my knowledge.
Property Owner or Owner's Authorized Representative's Name	ons A, B, and E are cor	rect to the best of my knowledge.
		ate ZIP Code
Property Owner or Owner's Authorized Representative's Name	St	
Property Owner or Owner's Authorized Representative's Name Address City	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code
Property Owner or Owner's Authorized Representative's Name Address City Signature Date	St	ate ZIP Code

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Sec				
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Rou 106 N. Jasper Avenue				
City State ZIP Margate New Jersey 084	Code Company NAIC Number 402			
SECTION G - COMMUNITY INFORMAT	TION (OPTIONAL)			
The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.				
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)				
G2. A community official completed Section E for a building located in Zone or Zone AO.	e A (without a FEMA-issued or community-issued BFE)			
G3. The following information (Items G4–G10) is provided for community flo	loodplain management purposes.			
G4. Permit Number G5. Date Permit Issued	G6. Date Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for: New Construction Substantia	ial Improvement			
G8. Elevation of as-built lowest floor (including basement) of the building:	feet meters			
G9. BFE or (in Zone AO) depth of flooding at the building site:	feet meters Datum			
G10. Community's design flood elevation:	feet meters Datum			
Local Official's Name Title Jim Gnlantine	(FM			
Community Name Telephor	609-822-197×			
Signature Date	3/23/22			
Comments (including type of equipment and location, per C2(e), if applicable)				
•	•			
	Check here if attachments.			

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE


See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 106 N. Jasper Avenue			Policy Number:	
City Margate	State New Jersey	ZIP Code 08402	Company NAIC Number	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

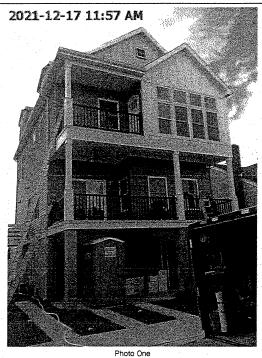

Front View Photo One Caption

Clear Photo One

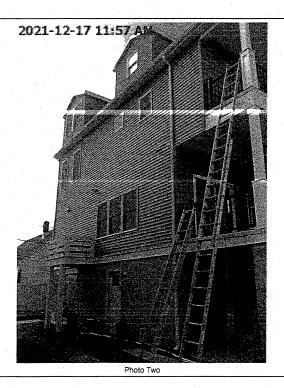


Photo Two Caption Left Side View

Clear Photo Two



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2021 Revised 04/2021 This report is subject to renewal 02/2023.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





ICC-ES Evaluation Report

ESR-2074

Reissued February 2021 Revised April 2021 This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021, 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with $\frac{1}{4}$ -inch-by- $\frac{1}{4}$ -inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

■ With a minimum of two openings on different sides of each enclosed area.



- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern. 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

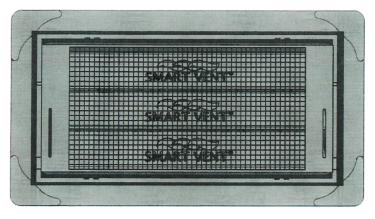


FIGURE 1-SMART VENT: MODEL 1540-510

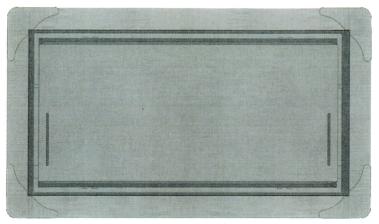


FIGURE 2—SMART VENT MODEL 1540-520

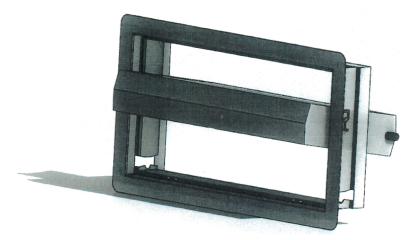


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

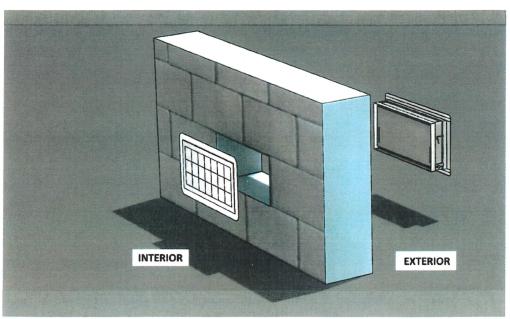


FIGURE 4—FLOOD VENT SEALING KIT