U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Maria R. Baldini Tr ust	Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: No. 108 South Thurlow Avenue	Company NAIC Number:
City: Margate City State: NJ	ZIP Code: 08402
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Nu Lot 13, Block 21, Plate 22	mber:
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.):Residential	
A5. Latitude/Longitude: Lat39.324667 Long. <u>-74.508359</u> Horizontal Datum: NAD 1 A6. Attach at least two and when possible four clear photographs (one for each side) of the building	
A7. Building Diagram Number: 8	
A8. For a building with a crawlspace or enclosure(s):	
a) Square footage of crawlspace or enclosure(s):	
b) Is there at least one permanent flood opening on two different sides of each enclosed area?	? X Yes □ No □ N/A
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 food Non-engineered flood openings:8	above adjacent grade: -
d) Total net open area of non-engineered flood openings in A8.c:0 sq. in.	
e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instructi	ons):1,600 sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions): 1,600 sq. ft.	
A9. For a building with an attached garage:	
a) Square footage of attached garage: n/a sq. ft.	
b) Is there at least one permanent flood opening on two different sides of the attached garage	? ☐ Yes ☐ No 💢 N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adj Non-engineered flood openings:n/a Engineered flood openings:n/a	acent grade:
d) Total net open area of non-engineered flood openings in A9.c:n/asq. in.	
e) Total rated area of engineered flood openings in A9.c (attach documentation – see Instruction	ons): n/a sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): sq. ft.	
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFOR	RMATION
B1.a. NFIP Community Name: <u>City of Margate City</u> B1.b. NFIP Community Ide	ntification Number:345304
B2. County Name: Atlantic County B3. State: NJ B4. Map/Panel No.:	34001C0434B5. Suffix: F
B6. FIRM Index Date:08 / 28 / 2018 B7. FIRM Panel Effective/Revised Date:08 / 28	3 / 2018
B8. Flood Zone(s): Zone AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use I	Base Flood Depth):10'
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: FIS X FIRM Community Determined Other:	
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other	/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Prot Designation Date:	ected Area (OPA)?
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)?	No

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box	x No.:	FOR INSURANCE COMPANY USE
No. 108 South Thurlow Avenue		Policy Number:
City: Margate City State: NJ ZIP Code: 084	02	Company NAIC Number:
SECTION C - BUILDING ELEVATION INFORMATION	(SURVEY R	REQUIRED)
C1. Building elevations are based on: Construction Drawings* Building Und A new Elevation Certificate will be required when construction of the building is construction.		on* X Finished Construction
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE) A99. Complete Items C2.a–h below according to the Building Diagram specified in Benchmark Utilized: NGS CORS Sta: NJCM (DI3828) Vertical Datum:	Item A7. In Pเ	R/AE, AR/A1–A30, AR/AH, AR/AO, uerto Rico only, enter meters.
Indicate elevation datum used for the elevations in items a) through h) below. NGVD 1929 X NAVD 1988 Other:		
Datum used for building elevations must be the same as that used for the BFE. Convers If Yes, describe the source of the conversion factor in the Section D Comments area.	sion factor use	
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	8.5	Check the measurement used: 50 X feet meters
b) Top of the next higher floor (see Instructions):	14.1	
c) Bottom of the lowest horizontal structural member (see Instructions):	n/a	a 💢 feet 🗌 meters
d) Attached garage (top of slab):	n/a	a X feet meters
e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area):	13.3	35_ ∑ feet ☐ meters
f) Lowest Adjacent Grade (LAG) next to building: Natural X Finished	8.2	20 X feet meters
g) Highest Adjacent Grade (HAG) next to building: 🔲 Natural 💢 Finished	8.7	70 X feet meters
h) Finished LAG at lowest elevation of attached deck or stairs, including structural support:	8.7	70 ☒ feet ☐ meters
SECTION D – SURVEYOR, ENGINEER, OR ARCHITI	ECT CERTIF	FICATION
This certification is to be signed and sealed by a land surveyor, engineer, or architect au information. I certify that the information on this Certificate represents my best efforts to false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section	interpret the c	tate law to certify elevation data available. I understand that any
Were latitude and longitude in Section A provided by a licensed land surveyor? X Ye		
☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐		
Certifier's Name: Bruce R. McKenna, PE, PLS License Number: NJ GB	-042562	
Title: Project Manager		
Company Name: Monarch Surveying & Engineering, LLC		
Address: P.O. Box 177		_
City: Pitman State: NJ ZIP Code: _	08071	
Signature: Date7 - 23	E-23	
Telephone: (856) 582-8200 Ext.: Email:info@monarcheng.com	1	Place Seal Here
Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance ag	ent/company, and (3) building owner.
Comments (including source of conversion factor in C2; type of equipment and location Building elev. info. based upon field survey observations in June 2023; Equip. elev. info: C.2.e. is for elevated deck for external A/C equipment; C.2.h. is for entrance deck landing. Elev. info. for C.2.a. is for bottom concrete slab of enc. area.	per C2.e; and	description of any attachments):
Observed Flood Vents at time of field survey noted Smart Vent Flood Vents, Model #1540-510 (rated at 200 sf Enc. Area Coverage per Vent)		

Buildi	ng Street Address (including Apt., No. 108 South Thurlow Ave		dg. No.) d	or P.O. Route a	nd Box I	No.:		NCE COMPANY USE
City:	Margate City	State:	NJ	ZIP Code: _	0840	2	Policy Number Company NAIC	
		UILDING MEASUR R ZONE AO, ZONE	The second second second		Control of the Contro	THE RESERVE OF THE PROPERTY OF THE PARTY OF	AND RESERVED TO A STREET OF THE PARTY OF THE	ED)
intend	ones AO, AR/AO, and A (withou ded to support a Letter of Map C meters.							
	ng measurements are based on: w Elevation Certificate will be re						on*	d Construction
	Provide measurements (C.2.a in neasurement is above or below t				g and c	heck the a	ppropriate boxes	s to show whether the
а	Top of bottom floor (including crawlspace, or enclosure) is:	basement,		1	feet	meters	above or	below the HAG.
b	 Top of bottom floor (including crawlspace, or enclosure) is: 	basement,		[] 1	feet] meters	above or	below the LAG.
n	or Building Diagrams 6–9 with p ext higher floor (C2.b in applicat	le	ings pro	vided in Sectio	n A Item	ıs 8 and/oı	r 9 (see pages 1-	
	Building Diagram) of the building Attached garage (top of slab) is:	is:			eet [meters meters	above or above or	below the HAG.below the HAG.
	op of platform of machinery and ervicing the building is:	or equipment			eet 🗀	meters	☐ above or	below the HAG.
	one AO only: If no flood depth n							e community's ormation in Section G.
	SECTION F - PROPERT	Y OWNER (OR OV	VNER'S	S AUTHORIZ	ED RE	PRESEN	TATIVE) CERT	IFICATION
	roperty owner or owner's authori						one A (without Bl	FE) or Zone AO must
_	neck here if attachments and des							
Prope	rty Owner or Owner's Authorized	l Representative Nan	ne:					
Addre	ss:							
City:					St	ate:	ZIP Code:	
Signat	ture:			Date	:			
Teleph	hone:	Ext.: Email:						
Comm	nents:							

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box	No.: FOR INSURANCE COMPANY USE
No. 108 South Thurlow Avenue	Policy Number:
City: Margate City State: NJ ZIP Code: 0840	Company NAIC Number:
SECTION G - COMMUNITY INFORMATION (RECOMMENDED FOR CO	MMUNITY OFFICIAL COMPLETION)
The local official who is authorized by law or ordinance to administer the community's floor Section A, B, C, E, G, or H of this Elevation Certificate. Complete the applicable item(s) a	odplain management ordinance can complete nd sign below when:
G1. The information in Section C was taken from other documentation that has be engineer, or architect who is authorized by state law to certify elevation inform elevation data in the Comments area below.)	en signed and sealed by a licensed surveyor, ation. (Indicate the source and date of the
G2.a. A local official completed Section E for a building located in Zone A (without a E5 is completed for a building located in Zone AO.	BFE), Zone AO, or Zone AR/AO, or when item
G2.b. A local official completed Section H for insurance purposes.	
G3.	tions to the information in Sections A, B, E and H.
G4.	n management purposes.
G5. Permit Number: G6. Date Permit Issued:	7/15/20
G7. Date Certificate of Compliance/Occupancy Issued:	
G8. This permit has been issued for: New Construction Substantial Improve	ment
G9.a. Elevation of as-built lowest floor (including basement) of the building:	∱feet ☐ meters Datum: _&&
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	d feet ☐ meters Datum: 55
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	feet meters Datum:
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:	∯feet ☐ meters Datum:
G11. Variance issued? Yes No If yes, attach documentation and describe	in the Comments area.
The local official who provides information in Section G must sign here. I have completed correct to the best of my knowledge. If applicable, I have also provided specific corrections.	the information in Section G and certify that it is s in the Comments area of this section.
Local Official's Name: Title:	CFM
NFIP Community Name: MANGAFY	
Telephone: Ext.: Email:	
Address: 9001 Winghester	
City:	rate: ZIP Code:
	/
Signature: Date:	5/1-
Comments (including type of equipment and location, per C2.e; description of any attachr Sections A, B, D, E, or H):	nents; and corrections to specific information in

Building Street Address (including Apt., U No. 108 South Thurlow Avenue	nit, Suite, and/or Blo	dg. No.) o	r P.O. Route a	ind Box No.:		SURANCE COMPANY USE
City: Margate City	State:	NJ	ZIP Code:	08402		umber:y NAIC Number:
SECTION H – BL (SURVE	IILDING'S FIRS Y NOT REQUIR					ZONES
The property owner, owner's authorized to determine the building's first floor heignearest tenth of a foot (nearest tenth of Instructions) and the appropriate Building	ght for insurance pu a meter in Puerto F	urposes. Rico). <i>Re</i> :	Sections A, B, <i>ference the F</i>	, and I must also t oundation Type	pe complete Diagrams (ed. Enter heights to the (at the end of Section H
H1. Provide the height of the top of the	floor (as indicated	in Found	ation Type Dia	agrams) above the	e Lowest Ad	djacent Grade (LAG):
 a) For Building Diagrams 1A, 1B, floor (include above-grade floors on subgrade crawlspaces or enclosure 	ly for buildings with		0.30	[X] feet [meters	above the LAG
b) For Building Diagrams 2A, 2B, higher floor (i.e., the floor above bas enclosure floor) is:			5.90	X feet [meters	☐ above the LAG
H2. Is all Machinery and Equipment ser H2 arrow (shown in the Foundation X Yes No	vicing the building Type Diagrams at	(as listed end of Se	l in Item H2 in ection H instru	structions) elevato actions) for the ap	ed to or abo propriate Bu	ove the floor indicated by the uilding Diagram?
SECTION I - PROPERTY	OWNER (OR OV	VNER'S	AUTHORIZ	ED REPRESEN	ITATIVE) (CERTIFICATION
The property owner or owner's authorize A, B, and H are correct to the best of my indicate in Item G2.b and sign Section G	knowledge. Note:	ho comp If the loc	letes Sections al floodplain r	A, B, and H mus management offic	t sign here. ial complete	The statements in Sections ed Section H, they should
Check here if attachments are provid	ed (including requi	red photo	os) and descri	be each attachme	ent in the Co	omments area.
Property Owner or Owner's Authorized F	Representative Nar	ne:				
Address:						
City:				State:	ZIP (Code:
0'			Data			
Signature:	xt.: Email:			·		
Telephone: E	At Email.					
Commonto.						

ELEVATION CERTIFICATE IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building	g Street Address (including Apt., Unit, Suite,	FOR INSURANCE COMPANY USE				
N	o. 108 South Thurlow Avenue				4	Policy Number:
City: _	Margate City	_ State:_	NJ	_ ZIP Code: _	08204	Company NAIC Number:

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: View of Left Side / Front Side of Residential Dwelling

Clear Photo One



Photo Two

Photo Two Caption: View of Right Side / Front Side of Residential Dwelling

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

BUILDING PHOTOGRAPHS

Continuation Page

Buildi	ng Street Address (including Apt., Unit,	Suite, and/or Blo	dg. No.)	or P.O. Route ar	nd Box No.:	FOR INSURANCE COMPANY USE
City:	lo. 108 South Thurlow Avenue Margate City	State:	N.J	ZIP Code:	08204	Policy Number:
	Margate Oity					Company NAIC Number:

Insert the third and fourth photographs below. Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo Three

Photo Three Caption:

View of Rear Side of Residential Dwelling

Clear Photo Three



Photo Four

Photo Four Caption:

View of Left Side of Residential Dwelling

Clear Photo Four



ICC-ES Evaluation Report

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2023 This report is subject to renewal 02/2025.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"



s use.

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.











 I-Codes provide recognition in all 50 states

Specialty code recognition

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

ICC-ES Evaluation Report ESR-2074

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code[®] (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021 and 2018 International Energy Conservation Code[®] (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

 $^{\dagger}\text{The ADIBC}$ is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing

Reissued February 2023

This report is subject to renewal February 2025.

the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation.

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:





- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the

- manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- **5.2** The Smart Vent[®] FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- **7.2** The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061 (877) 441-8368 www.smartvent.com info@smartvent.com

TABLE 1—MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

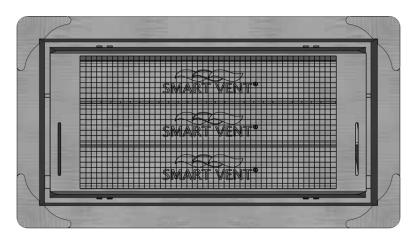


FIGURE 1—SMART VENT: MODEL 1540-510

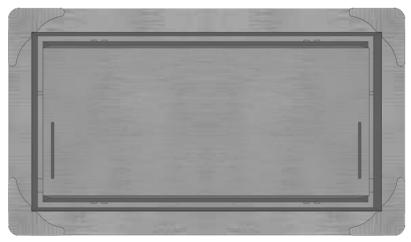


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

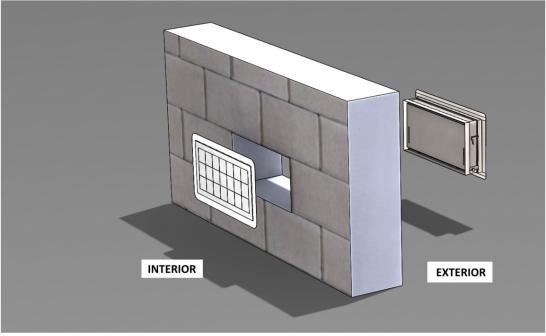


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2023

This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-524; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 *International Building Code*® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

2.1.2 DSA:

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 *International Residential Code*® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2023.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2023
This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-524; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building and the Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 *International Building Code®* meet the requirements of the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2023.

