## U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

# **ELEVATION CERTIFICATE**Important: Follow the instructions on pages 1–9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION FOR INSURANCE COMPANY				RANCE COMPANY USE				
A1. Building Owner's Name  Kozma Gjika  Policy Number:						ber:		
A2. Building Stree Box No. 22 S Coolidge Ave	•	cluding Apt., Unit, Suit	te, and/o	r Bldg. No.) o	r P.O. Route and	Company N	AIC Number:	
City Margate				State New Jer	sey	ZIP Code 08402		
	A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.) Block 132 Lot 204							
A4. Building Use (	e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.) Residenti	al		
A5. Latitude/Longi	tude: Lat. <u>3</u>	9.318888	Long7	74.515000	Horizonta	ıl Datum: 🔲 NAD 1	927 × NAD 1983	
A6. Attach at least	2 photograp	hs of the building if the	e Certific	ate is being ι	used to obtain floo	d insurance.		
A7. Building Diagra	am Number	7						
A8. For a building	with a crawls	space or enclosure(s):						
a) Square foo	tage of craw	Ispace or enclosure(s)			550.00 sq ft			
b) Number of	permanent flo	ood openings in the cr	awlspace	e or enclosure	e(s) within 1.0 foo	t above adjacent gra	ade 3	
c) Total net ar	ea of flood o	penings in A8.b		600.00 sq ir	1			
d) Engineered	l flood openir	ngs? 🗵 Yes 🗌 N	No					
A9. For a building \	vith an attach	ned garage:						
a) Square footage of attached garage sq ft								
b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade 2								
c) Total net area of flood openings in A9.b 400.00 sq in								
d) Engineered flood openings? 🕱 Yes 🗌 No								
SECTION B – FLOOD INSURANCE RATE MAP (FIRM) INFORMATION								
B1. NFIP Community Name & Community Number B2. County Name B3. State								
Margate 345304	,	•		Atlantic			New Jersey	
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date	Effe	LRM Panel ective/ vised Date	B8. Flood Zone(s)	B9. Base Flood E (Zone AO, us	levation(s) e Base Flood Depth)	
34001C0434	F	08-28-2018	08-28-2		AE	10.0		
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:  ☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:								
B11. Indicate elev	ation datum ı	used for BFE in Item E	39: 🗌 N	GVD 1929	× NAVD 1988	Other/Source:		
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No								
Designation Date: CBRS DPA								

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

				FOR INSURANCE COMPANY USE Policy Number:		
Building Street Address (including Apt., Unit, Suite 22 S Coolidge Avenue	e, and/or Bldg. No.) or P.O. F	Route and Box No.	Policy	Number:		
City Margate		IP Code 8402	Compa	ny NAIC I	Number	
SECTION C - BUILD	ING ELEVATION INFORM	ATION (SURVEY R	EQUIRE	D)		
C1. Building elevations are based on: Col *A new Elevation Certificate will be required	-	uilding Under Constru	uction*	ズ Finisl	hed Construction	
C2. Elevations – Zones A1–A30, AE, AH, A (with Complete Items C2.a–h below according to Benchmark Utilized: GPS	n BFE), VE, V1–V30, V (with the building diagram specific Vertical Datu	BFE), AR, AR/A, AR ed in Item A7. In Puerl m: NAVD 1988	/AE, AR// to Rico oi	A1–A30, <i>A</i> nly, enter	AR/AH, AR/AO. meters.	
Indicate elevation datum used for the elevati ☐ NGVD 1929 ☑ NAVD 1988 ☐	, • ,	elow.				
Datum used for building elevations must be	the same as that used for the	e BFE.	Che	ck the me	easurement used.	
a) Top of bottom floor (including basement,	crawlspace, or enclosure flo	or)			meters	
b) Top of the next higher floor		***************************************	14.7	✓ feet	meters	
c) Bottom of the lowest horizontal structural	member (V Zones only)		N/A	feet	meters	
d) Attached garage (top of slab)			5.6		meters	
<ul> <li>e) Lowest elevation of machinery or equipm (Describe type of equipment and location</li> </ul>	ent servicing the building in Comments)		14.7	⊠ feet	meters	
f) Lowest adjacent (finished) grade next to	building (LAG)		5.4	✓ feet	meters	
g) Highest adjacent (finished) grade next to	building (HAG)	Biological and the state of the	5.6	⊠ feet	meters	
<ul> <li>h) Lowest adjacent grade at lowest elevation structural support</li> </ul>	n of deck or stairs, including		5.3	⊠ feet	meters	
SECTION D - SURV	EYOR, ENGINEER, OR A	RCHITECT CERTIFI	CATION	I		
This certification is to be signed and sealed by a l l certify that the information on this Certificate rep statement may be punishable by fine or imprison	and surveyor, engineer, or a resents my best efforts to in ment under 18 U.S. Code, S	architect authorized by terpret the data availa ection 1001.	law to c	ertify elev derstand t	ation information. hat any false	
Were latitude and longitude in Section A provided					e if attachments.	
Certifier's Name James R. Boney, PLS	License Number 24GS03126400					
Title						
Professional Land Surveyor				P	ace	
Company Name James R. Boney & Assoc.					eal	
Address 13 Stone Mill Court				Н	ere	
City Egg Harbor Township	State New Jersey	ZIP Code 08234				
Signature Amhhy	Date 02-07-2023	Telephone (609) 788-8013	Ext.			
Copy all pages of this Elevation Cerlificate and all at	tachments for (1) community	official, (2) insurance a	gent/com	npany, and	(3) building owner.	
Comments (including type of equipment and locati 2.5 story frame dwelling. A/C outside on platform.		pove the BFE.				

#### **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 22 S Coolidge Avenue City State ZIP Code Company NAIC Number Margate 08402 New Jersey SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE) For Zones AO and A (without BFE), complete Items E1-E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1-E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters. E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement, crawlspace, or enclosure) is feet meters above or below the HAG. b) Top of bottom floor (including basement, crawlspace, or enclosure) is feet meters above or below the LAG. E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/or 9 (see pages 1–2 of Instructions). the next higher floor (elevation C2.b in the diagrams) of the building is feet meters above or below the HAG. E3. Attached garage (top of slab) is feet meters above or below the HAG. E4. Top of platform of machinery and/or equipment servicing the building is feet meters above or below the HAG. E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance? Yes No Unknown. The local official must certify this information in Section G. SECTION F - PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge. Property Owner or Owner's Authorized Representative's Name Address City State ZIP Code Signature Date Telephone Comments Check here if attachments.

## **ELEVATION CERTIFICATE**

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corr	esponding information from	Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, S 22 S Coolidge Avenue	uite, and/or Bldg. No.) or P.O. I	Route and Box No.	Policy Number:
City Margate		ZIP Code 08402	Company NAIC Number
SECTION	ON G - COMMUNITY INFORM	IATION (OPTIONAL)	
The local official who is authorized by law or of Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, er	Certificate. Complete the appl	munity's floodplain ma icable item(s) and sigi	unagement ordinance can complete n below. Check the measurement
G1. The information in Section C was tak engineer, or architect who is authoriz data in the Comments area below.)	en from other documentation the death of the decision in the d	nat has been signed a nformation. (Indicate th	and sealed by a licensed surveyor, ne source and date of the elevation
G2. A community official completed Sect or Zone AO.	ion E for a building located in Z	one A (without a FEM	A-issued or community-issued BFE)
G3. The following information (Items G4-	-G10) is provided for communit	y floodplain managem	ent purposes.
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued
G7. This permit has been issued for:	New Construction  Substa	intial Improvement	
G8. Elevation of as-built lowest floor (including of the building:	j basement)		t  meters Datum
G9. BFE or (in Zone AO) depth of flooding at t	he building site:	feet	meters Datum
G10. Community's design flood elevation:		feet	t  meters Datum
Local Official's Name	Title  Calantono  Teleph		CFM
MARGA	Teleph 7g		09822-1974
Signature	Date		2/23/23
Comments (including type of equipment/and loc	ation, per C2(e), if applicable)		
			Check here if attachments.

#### **BUILDING PHOTOGRAPHS**

#### **ELEVATION CERTIFICATE**

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the cor	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit,	Suite, and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:
22 S Coolidge Avenue			
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption Front 02-03-23

Clear Photo One



Photo Two Caption Rear 02-03-23

Clear Photo Two

## **BUILDING PHOTOGRAPHS**

## **ELEVATION CERTIFICATE**

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corres	sponding information	from Section A.	FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Sui 22 S Coolidge Avenue	te, and/or Bldg. No.) or	P.O. Route and Box No.	Policy Number:
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption Smart Vent Model 1540-510 Typical, one of five 02-03-23

Clear Photo Three

Photo Four

Photo Four Caption Clear Photo Four



Most Widely Accepted and Trusted

## **ICC-ES Evaluation Report**

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

ESR-2074

Reissued 02/2021 Revised 04/2021 This report is subject to renewal 02/2023.

**DIVISION: 08 00 00—OPENINGS** 

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

## **REPORT HOLDER:**

## SMART VENT PRODUCTS, INC.

#### **EVALUATION SUBJECT:**

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

A Subsidiary of CODE CO

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.





## **ICC-ES Evaluation Report**

**ESR-2074** 

Reissued February 2021 Revised April 2021

This report is subject to renewal February 2023.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00-OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

**EVALUATION SUBJECT:** 

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

#### 1.0 EVALUATION SCOPE

#### Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2021, 2018 International Energy Conservation Code® (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

<sup>†</sup>The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

#### Properties evaluated:

- Physical operation
- Water flow

#### 2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

#### 3.0 DESCRIPTION

#### 3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is

fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per

#### 3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

#### 3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with  $\frac{1}{4}$ -inch-by- $\frac{1}{4}$ -inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm<sup>2</sup>) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural

#### 3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 - 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

#### 4.0 DESIGN AND INSTALLATION

#### 4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as

With a minimum of two openings on different sides of each enclosed area.



- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

## 4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

## 5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

**5.1** The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.

5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

## 6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

#### 7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

#### TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT®	1540-510	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
FloodVENT® Overhead Door	1540-524	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Overhead Door	1540-514	15 <sup>3</sup> / <sub>4</sub> " X 7 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT®	1540-570	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 <sup>3</sup> / <sub>4</sub> "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m<sup>2</sup>

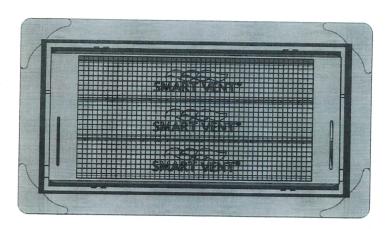


FIGURE 1—SMART VENT: MODEL 1540-510

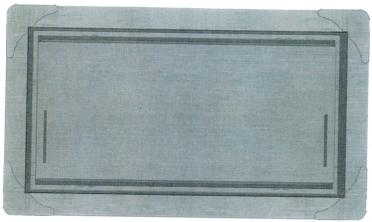


FIGURE 2—SMART VENT MODEL 1540-520



FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

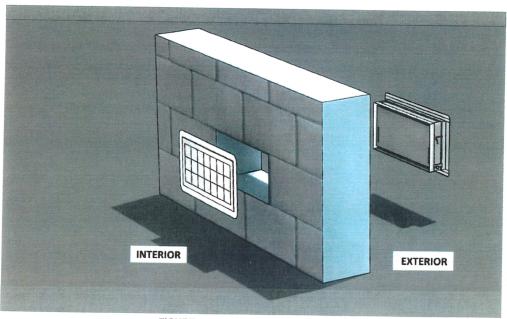


FIGURE 4-FLOOD VENT SEALING KIT