U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION					FOR INSU	RANCE COMPANY USE	
A1. Building Owner's Name Revolution Builders					Policy Num	ıber:	
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.442 N Pembroke Avenue					. Route and	Company N	NAIC Number:
City Margate				State New Jersey		ZIP Code 08402	
A3. Property Desc Block 617, Lot 24	A3. Property Description (Lot and Block Numbers, Tax Parcel Number, Legal Description, etc.)						
A4. Building Use ((e.g., Resider	ntial, Non-Residential, A	 Additior	n, Accessory, etc.)	Residential		
A5. Latitude/Longi	itude: Lat. N	l°39°19'51.5"	Long. <u>\</u>	W74°30'07.1"	Horizontal Datum	ı: NAD	1927 X NAD 1983
A6. Attach at least	t 2 photograp	ohs of the building if the	Certifi	cate is being used t	o obtain flood insura	ance.	_
A7. Building Diagra	am Number	8					
A8. For a building	with a crawls	space or enclosure(s):					
a) Square foo	tage of crawl	Ispace or enclosure(s)		1,492 sq ft			
b) Number of	permanent flo	ood openings in the cra	wlspac	ce or enclosure(s) w	vithin 1.0 foot above	adjacent gr	rade8
c) Total net ar	ea of flood or	penings in A8.b1,60	00 :	sq in			
d) Engineered	I flood openir	ngs? 🛛 Yes 🗌 No	o				
A9. For a building v	with an attacl	ned garage:					
		hed garage 0		sq ft			
		ood openings in the atta		•	ot ahove adiacent o	rade	0
		penings in A9.b		sq in	ot above adjace		
d) Engineered		-		- 34 111			
۵, <u>ـ</u>	nood opo	ys: □ 100 ₪	,				
	SE	CTION B - FLOOD IN	ISURA	NCE RATE MAP	(FIRM) INFORMA	TION	
B1. NFIP Communi		ommunity Number		B2. County Name)		B3. State
Margate City 34530)4			Atlantic			New Jersey
B4. Map/Panel Number	B5. Suffix	B6. FIRM Index Date		IRM Panel ffective/	B8. Flood Zone(s)	B9. Bas	se Flood Elevation(s)
34001C 0434	F	01/30/2015	R	evised Date	AE	Floc	ne AO, use Base `´od Depth)
		01/30/2013	00,20	/2010	AE	9.00	
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:							
☐ FIS Profile ☑ FIRM ☐ Community Determined ☐ Other/Source:							
B11. Indicate eleva	B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:						
B12. Is the building	ı located in a	Coastal Barrier Resour	rces Sy	vstem (CBRS) area	or Otherwise Proter	rted Area (C	PAI? □ Yes ☑ No
Designation D				□ OPA		, , , , , , , , , , , , , , , , , , , ,	777): [] 100 E] 1.0
	-		D				

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite, and/o 442 N Pembroke Avenue	Policy Number:					
CityStateZIP CodeMargateNew Jersey08402			Company NAIC Number			
SECTION C – BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)						
SECTION C – BUILDING EL C1. Building elevations are based on: Construction *A new Elevation Certificate will be required when one C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), Complete Items C2.a—h below according to the build Benchmark Utilized: Local BM Indicate elevation datum used for the elevations in ineed of the properties of the properties of the same of the properties	on Drawings* construction of the love, V1–V30, V (with ding diagram spectors) tems a) through h) Source: ne as that used for pace, or enclosure or (V Zones only) vicing the building ments)	Building Under Construction is complete. ith BFE), AR, AR/A, AR, iffed in Item A7. In Puert itum: NAVD 1988 below. the BFE.	Check the measurement used. feet meters feet meters			
	• • •		feet meters			
 g) Highest adjacent (finished) grade next to building h) Lowest adjacent grade at lowest elevation of dec structural support 		<u>5</u> . <u>6</u> <u>5</u> . <u>4</u>				
SECTION D – SURVEYOR,	ENGINEER, OR	ARCHITECT CERTIFI	CATION			
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by law to certify elevation information. I certify that the information on this Certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001. Were latitude and longitude in Section A provided by a licensed land surveyor?						
Certifier's Name James R. Boney, PLS	License Number 31264					
Title Professional Land Surveyor Company Name James R. Boney & Associates, LLC Address 13 Stone Mill Court	Place Seal Here					
City	State	ZIP Code	-			
Egg Harbor Twp	New Jersey	08234				
Signature	Date 10/04/2019	Telephone (609) 788-8013				
Copy all pages of this Elevation Certificate and all attachment Comments (including type of equipment and location, per 2.5 story dwelling on full-story foundation walls. A/C unit of floor is used primarily for parking and storage. The eight floor	C2(e), if applicable	e) . All other mechanicals a	are inside above the FF. The ground			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. Policy Number: 442 N Pembroke Avenue City State ZIP Code Company NAIC Number Margate New Jersey 08402 SECTION E - BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE) For Zones AO and A (without BFE), complete Items E1-E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1-E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG). a) Top of bottom floor (including basement. crawlspace, or enclosure) is b) Top of bottom floor (including basement. crawlspace, or enclosure) is feet meters above or below the LAG. E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Items 8 and/or 9 (see pages 1–2 of Instructions), the next higher floor (elevation C2.b in the diagrams) of the building is $_{-}$ $\ \square$ feet $\ \square$ meters $\ \square$ above or $\ \square$ below the HAG. E3. Attached garage (top of slab) is feet meters above or below the HAG. E4. Top of platform of machinery and/or equipment servicing the building is E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor elevated in accordance with the community's floodplain management ordinance?

Yes

No

Unknown. The local official must certify this information in Section G. SECTION F - PROPERTY OWNER (OR OWNER'S REPRESENTATIVE) CERTIFICATION The property owner or owner's authorized representative who completes Sections A, B, and E for Zone A (without a FEMA-issued or community-issued BFE) or Zone AO must sign here. The statements in Sections A, B, and E are correct to the best of my knowledge. Property Owner or Owner's Authorized Representative's Name Address City State ZIP Code Signature Date Telephone Comments Check here if attachments.

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O 442 N Pembroke Avenue	Policy Number:					
City State Margate New Jersey	ZIP Code 08402	Company NAIC Number				
SECTION G - COMMUNITY INFOR	MATION (OPTIONAL)					
The local official who is authorized by law or ordinance to administer the corn Sections A, B, C (or E), and G of this Elevation Certificate. Complete the apused in Items G8–G10. In Puerto Rico only, enter meters.	mmunity's floodplain mai plicable item(s) and sign	nagement ordinance can complete below. Check the measurement				
G1. The information in Section C was taken from other documentation that has been signed and sealed by a licensed surveyor, engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation data in the Comments area below.)						
G2. A community official completed Section E for a building located in or Zone AO.	Zone A (without a FEMA	A-issued or community-issued BFE)				
G3. The following information (Items G4–G10) is provided for commun	ity floodplain manageme	ent purposes.				
G4. Permit Number G5. Date Permit Issued		Date Certificate of ompliance/Occupancy Issued				
G7. This permit has been issued for: New Construction Subs	tantial Improvement					
G8. Elevation of as-built lowest floor (including basement) of the building:		meters Datum				
G9. BFE or (in Zone AO) depth of flooding at the building site:	feet	meters Datum				
G10. Community's design flood elevation:	feet	meters Datum				
Local Official's Name Title 10/ez/15						
OR ALGATE	ohone 605	-800-1974				
Signature Date		10/22/15				
Comments (including type of equipment and location, per C2(e), if applicable)						
		Check here if attachments.				

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008

Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Ap	Policy Number:		
442 N Pembroke Avenue			
City	State	ZIP Code	Company NAIC Number
Margate	New Jersey	08402	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

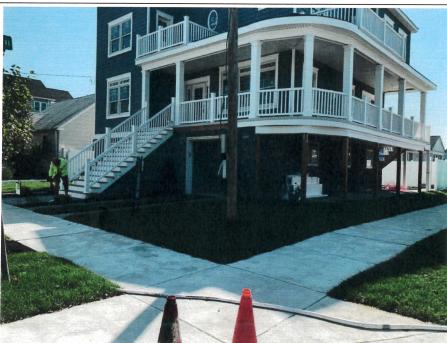


Photo One

Photo One Caption Front 10/01/2019



Photo Two

Photo Two Caption Rear 10/01/2019

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, co	FOR INSURANCE COMPANY USE		
Building Street Address (including 442 N Pembroke Avenue	Policy Number:		
City Margate	State New Jersev	ZIP Code 08402	Company NAIC Number
ivial gate	inew Jersey	08402	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.

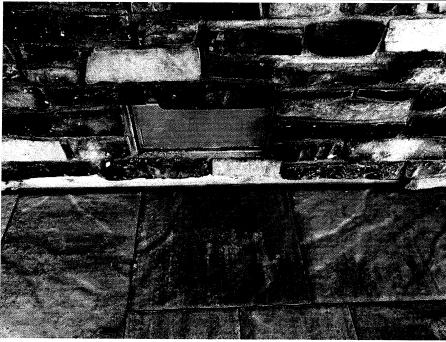


Photo One

Photo One Caption Smart Vent Model 1540-510 (typical)

Photo Two

Photo Two

Photo Two Caption



Most Widely Accepted and Trusted

ICC-ES Report

ESR-2074

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

This report is subject to renewal 02/2019.

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMARTVENT PRODUCTS, INC.

430 ANDBRO DRIVE, UNIT 1 **PITMAN, NEW JERSEY 08071**

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514



Look for the trusted marks of Conformity!

"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"





ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.







ICC-ES Evaluation Report

ESR-2074

Reissued February 2017

This report is subject to renewal February 2019.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMARTVENT PRODUCTS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (877) 441-8368 www.smartvent.com info@smartvent.com

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2015, 2012, 2009 and 2006 International Residential Code® (IRC)
- 2013 Abu Dhabi International Building Code (ADIBC)[†]

 $^{\dagger}\text{The ADIBC}$ is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent[®] FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing the door to rotate out of the way and allow flow.

The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with \$^{1}_{4}\$-inch-by-\$^{1}_{4}\$-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs recognized in this report do not offer natural ventilation.

4.0 DESIGN AND INSTALLATION

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.



■ With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but

are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015.

7.0 IDENTIFICATION

The Smart VENT® models recognized in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).

TABLE 1-MODEL SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT [®]	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent [®] Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m^2

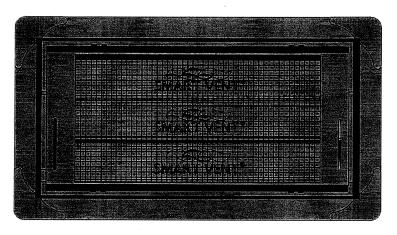


FIGURE 1—SMART VENT: MODEL 1540-510

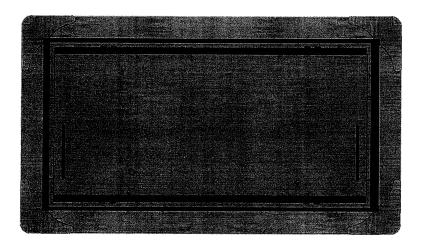


FIGURE 2—SMART VENT MODEL 1540-520

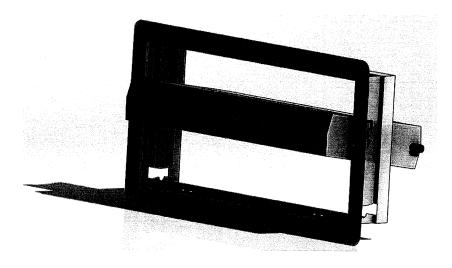


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN