U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB Control No. 1660-0008 Expiration Date: 06/30/2026

ELEVATION CERTIFICATE

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A – PROPERTY INFORMATION FOR INSURANCE COMPANY USE
A1. Building Owner's Name: Jonathan & Sheri Siegal Policy Number:
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.: 6 Edgmar Circle
City: Margate State: NJ ZIP Code: 08402
A3. Property Description (e.g., Lot and Block Numbers or Legal Description) and/or Tax Parcel Number: Block 510.03 Lot 59
A4. Building Use (e.g., Residential, Non-Residential, Addition, Accessory, etc.): Residential
A5. Latitude/Longitude: Lat. <u>39.332932</u> Long. <u>-74.505590</u> Horizontal Datum: NAD 1927 NAD 1983 WGS 84
A6. Attach at least two and when possible four clear photographs (one for each side) of the building (see Form pages 7 and 8).
A7. Building Diagram Number:7
A8. For a building with a crawlspace or enclosure(s):
a) Square footage of crawlspace or enclosure(s): 1,151.00 sq. ft.
b) Is there at least one permanent flood opening on two different sides of each enclosed area? 🖂 Yes 🗌 No 📗 N/A
c) Enter number of permanent flood openings in the crawlspace or enclosure(s) within 1.0 foot above adjacent grade: Non-engineered flood openings:
d) Total net open area of non-engineered flood openings in A8.c: 0.00 sq. in.
e) Total rated area of engineered flood openings in A8.c (attach documentation – see Instructions): 1,200.00 sq. ft.
f) Sum of A8.d and A8.e rated area (if applicable – see Instructions):1,200.00 sq. ft.
A9. For a building with an attached garage:
a) Square footage of attached garage: Sq. ft.
b) Is there at least one permanent flood opening on two different sides of the at ached garage? Yes No N/A
c) Enter number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade: Non-engineered flood openings: Engineered flood openings:
d) Total net open area of non-engineered flood openings in A9.c: sq. in.
e) Total rated area of engineered flood openings in A9.c (attach documentation – see Instructions): sq. ft.
f) Sum of A9.d and A9.e rated area (if applicable – see Instructions): sq. ft.
SECTION B - FLOOD INSURANCE RATE MAP (FIRM) INFORMATION
B1.a. NFIP Community Name: Margate B1.b. NFIP Community Identification Number: 345304
B2. County Name: <u>Atlantic</u> B3. State: <u>NJ</u> B4. Map/Panel No.: <u>34001C0434</u> B5. Suffix: <u>F</u>
B6. FIRM Index Date: 08/28/2018 B7. FIRM Panel Effective/Revised Date: 08/28/2018
B8. Flood Zone(s): AE B9. Base Flood Elevation(s) (BFE) (Zone AO, use Base Flood Depth): 8.0
B10. Indicate the source of the BFE data or Base Flood Depth entered in Item B9: ☐ FIS ☐ FIRM ☐ Community Determined ☐ Other:
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 NAVD 1988 Other/Source:
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? Yes No Designation Date: CBRS OPA
B13. Is the building located seaward of the Limit of Moderate Wave Action (LiMWA)? Yes No

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE						
	Policy Number:						
City: Margate State: NJ ZIP Code: 08402	Company NAIC Number:						
SECTION C - BUILDING ELEVATION INFORMATION (SURVEY REQUIRED)							
C1. Building elevations are based on: Construction Drawings* Building Under Construction *A new Elevation Certificate will be required when construction of the building is complete.	on* 🔀 Finished Construction						
C2. Elevations – Zones A1–A30, AE, AH, AO, A (with BFE), VE, V1–V30, V (with BFE), AR, AR/A, A A99. Complete Items C2.a–h below according to the Building Diagram specified in Item A7. In Pt Benchmark Utilized: GPS Vertical Datum: NAVD 1988							
Indicate elevation datum used for the elevations in items a) through h) below. ☐ NGVD 1929 ☑ NAVD 1988 ☐ Other:							
Datum used for building elevations must be the same as that used for the BFE. Conversion factor use If Yes, describe the source of the conversion factor in the Section D Comments area.	ed? Yes No Check the measurement used:						
a) Top of bottom floor (including basement, crawlspace, or enclosure floor):	9.00 feet meters						
b) Top of the next higher floor (see Instructions):	8.20 🛛 feet 🗌 meters						
c) Bottom of the lowest horizontal structural member (see Instructions):	feet meters						
d) Attached garage (top of slab):	feet meters						
e) Lowest elevation of Machinery and Equipment (M&E) servicing the building (describe type of M&E and location in Section D Comments area): 18	8.20 🛛 feet 🗌 meters						
f) Lowest Adjacent Grade (LAG) next to building: Natural Finished	8.90 🛛 feet 🗌 meters						
g) Highest Adjacent Grade (HAG) next to building: Natural Finished	9.00 🛛 feet 🗌 meters						
h) Finished LAG at lowest elevation of attached deck or stairs, including structural support:	9.00 🛛 feet 🗌 meters						
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERTIF	FICATION						
This certification is to be signed and sealed by a land surveyor, engineer, or architect authorized by st information. I certify that the information on this Certificate represents my best efforts to interpret the d false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.							
Were latitude and longitude in Section A provided by a licensed land surveyor? ☐ Yes ☐ No							
Check here if attachments and describe in the Comments area.							
Certifier's Name: James R. Boney, PLS License Number: 24GS03126400	_						
Title: Professional Lans Surveyor	_						
Company Name: James R. Boney & Associates							
Address: 13 Stone Mill Court	_						
City: Egg Harbor Township State: NJ ZIP Code: 08234	_						
Signature: Date: 07/09/2023	_						
Telephone: (609) 788-8013 Ext.: Email: boney@comcast.net	Place Seal Here						
Copy all pages of this Elevation Certificate and alLattachments for (1) community official, (2) insurance age							
Comments (including source of conversion factor in C2; type of equipment and location per C2.e; and New construction 2.5 story dwelling. A/C units outside on platform. Other mechanicals inside Smart Vents Model 1540-510 are installed.	description of any attachments): e at or above the FF.						

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box	No.: FOR INSURANCE COMPANY USE
6 Edgmar Circle	Policy Number:
City: Margate State: NJ ZIP Code: 08402	Company NAIC Number:
SECTION E – BUILDING MEASUREMENT INFORMATION (FOR ZONE AO, ZONE AR/AO, AND ZONE A (V	No state of the factor of the state of the s
For Zones AO, AR/AO, and A (without BFE), complete Items E1–E5. For Items E1–E4, u intended to support a Letter of Map Change request, complete Sections A, B, and C. Chenter meters.	
Building measurements are based on:	
E1. Provide measurements (C.2.a in applicable Building Diagram) for the following and measurement is above or below the natural HAG and the LAG.	check the appropriate boxes to show whether the
a) Top of bottom floor (including basement, crawlspace, or enclosure) is:	☐ meters ☐ above or ☐ below the HAG.
b) Top of bottom floor (including basement, crawlspace, or enclosure) is:	meters above or below the LAG.
E2. For Building Diagrams 6–9 with permanent flood openings provided in Section A Item next higher floor (C2.b in applicable	
Building Diagram) of the building is: [feet [meters above or below the HAG meters above or below the HAG.
E4. Top of platform of machinery and/or equipment	
servicing the building is:	meters above or below the HAG.
E5. Zone AO only: If no flood depth number is available, is the top of the bottom floor ele floodplain management ordinance?	evated in accordance with the community's I official must certify this information in Section G.
SECTION F - PROPERTY OWNER (OR OWNER'S AUTHORIZED RE	PRESENTATIVE) CERTIFICATION
The property owner or owner's authorized representative who completes Sections A, B, a sign here. The statements in Sections A, B, and E are correct to the best of my knowledge.	
Check here if attachments and describe in the Comments area.	
Property Owner or Owner's Authorized Representative Name:	
Address:	
City:	tate: ZIP Code:
Signature: Date:	
Telephone: Ext.: Email:	
Comments:	
	·

Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P 6 Edgmar Circle	P.O. Route and Box No.:	FOR INSURANCE COMPANY USE		
City: Margate State: NJ 2	ZIP Code: <u>08402</u>	de: 08402 Policy Number:		
SECTION G - COMMUNITY INFORMATION (RECOMM	ENDED FOR COMMUNIT	Y OFFICIAL COMPLETION)		
The local official who is authorized by law or ordinance to administer the Section A, B, C, E, G, or H of this Elevation Certificate. Complete the				
G1. The information in Section C was taken from other docume engineer, or architect who is authorized by state law to cert elevation data in the Comments area below.)				
G2.a. A local official completed Section E for a building located in E5 is completed for a building located in Zone AO.	n Zone A (without a BFE), Zon	e AO, or Zone AR/AO, or when item		
G2.b. A local official completed Section H for insurance purposes	3.			
G3. $\ \ \Box$ In the Comments area of Section G, the local official description	ibes specific corrections to the	information in Sections A, B, E and H.		
G4. \Box The following information (Items G5–G11) is provided for \Box	ommunity floodplain manager	nent purposes.		
G5. Permit Number: 26220727 G6. Date Perm	nit Issued: // /3/20	22		
G7. Date Certificate of Compliance/Occupancy Issued:				
G8. This permit has been issued for: New Construction St	ubstantial Improvement			
G9.a. Elevation of as-built lowest floor (including basement) of the building:		meters Datum: 1588		
G9.b. Elevation of bottom of as-built lowest horizontal structural member:	91 Kfeet	meters Datum:		
G10.a. BFE (or depth in Zone AO) of flooding at the building site:	feet [meters Datum:		
G10.b. Community's minimum elevation (or depth in Zone AO) requirement for the lowest floor or lowest horizontal structural member:		meters Datum: 1571		
G11. Variance issued? \square Yes \square No \square If yes, attach documental	ation and describe in the Com	ments area.		
The local official who provides information in Section G must sign here correct to the best of my knowledge. If applicable, I have also provided	. I have completed the informal specific corrections in the Co	ation in Section G and certify that it is imments area of this section.		
Local Official's Name:	. Title:	CFM		
NFIP Community Name: MARGA 76 37	5304			
Telephone: Ext.: Email:				
Address: Suc (winches he su				
City: MARGATE	State:	ZIP Code: 05 467		
Signature:	Date: 7/25/23			
Comments (including type of equipment and location, per C2.e; descrip Sections A, B, D, E, or H):	otion of any attachments; and	corrections to specific information in		

Building Street Address (including A	pt., Unit, Suite	, and/or Bldg. No.)	or P.O. Route and Box	No.:	FOR INSURANCE COMPANY	USE
6 Edgmar Circle		State: NJ	ZID Cada: 08403		Policy Number:	1.50
City: Margate		_ State: NJ	_ ZIP Code: <u>08402</u>		Company NAIC Number:	
	A STATE OF THE PARTY OF THE PAR		OR HEIGHT INFOR			
The property owner, owner's author to determine the building's first floor nearest tenth of a foot (nearest tenth instructions) and the appropriate	or height for in: ith of a meter i	surance purposes. in Puerto Rico). <i>Re</i>	Sections A, B, and I eference the Founda	must also b tion Type l	oe completed. Enter heights to the Diagrams (at the end of Section	
H1. Provide the height of the top of	of the floor (as	indicated in Found	dation Type Diagrams) above the	Lowest Adjacent Grade (LAG):	
 a) For Building Diagrams 1A floor (include above-grade floo subgrade crawlspaces or enclored) 	ors only for bui	ildings with	ı[feet	☐ meters ☐ above the LAG	
 b) For Building Diagrams 2A higher floor (i.e., the floor above enclosure floor) is: 			[feet	meters above the LAG	
H2. Is all Machinery and Equipme H2 arrow (shown in the Found Yes No						y the
SECTION I - PROPE	RTY OWNER	R (OR OWNER'S	AUTHORIZED RE	EPRESEN	TATIVE) CERTIFICATION	A(197)
The property owner or owner's auth A, B, and H are correct to the best indicate in Item G2.b and sign Section	of my knowled					
Check here if attachments are p	orovided (inclu	uding required phot	tos) and describe eac	h attachme	ent in the Comments area.	
Property Owner or Owner's Author	ized Represer	ntative Name:				
Address:	•		14-14-14-14-14-14-14-14-14-14-14-14-14-1			
City:			5	State:	ZIP Code:	
Signature:			Date:			
Telephone:	Ext.:	Email:				
Comments:						

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 BUILDING PHOTOGRAPHS

See Instructions for Item A6.

Building Street Address (including Apt., Ur	nit, Suite, and/or Bl	dg. No.)	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
6 Edgmar Circle				Policy Number:
City: Margate	State:	NJ	ZIP Code: 08402	Company NAIC Number:
				Company NAIC Number.

Instructions: Insert below at least two and when possible four photographs showing each side of the building (for example, may only be able to take front and back pictures of townhouses/rowhouses). Identify all photographs with the date taken and "Front View," "Rear View," "Right Side View," or "Left Side View." Photographs must show the foundation. When flood openings are present, include at least one close-up photograph of representative flood openings or vents, as indicated in Sections A8 and A9.



Photo One

Photo One Caption: Front 06-26-23

Clear Photo One



Photo Two

Photo Two Caption: Rear 06-26-23

Clear Photo Two

IMPORTANT: MUST FOLLOW THE INSTRUCTIONS ON PAGES 9-19 **BUILDING PHOTOGRAPHS**

Continuation Page

Building Street Address (including Ap	t., Unit, Suite, and/or Bld	lg. No.) d	or P.O. Route and Box No.:	FOR INSURANCE COMPANY USE
6 Edgmar Circle				Policy Number:
City: Margate	State:	NJ	_ ZIP Code: <u>08402</u>	Company NAIC Number:
Insert the third and fourth photograp View," or "Left Side View." When flo vents, as indicated in Sections A8 a	od openings are preser			ont View," "Rear View," "Right Side raph of representative flood openings or
		Pho	to Three	
Photo Three Caption: Smart Vent I	Vlodel 1540-510 (typi	cal, one	e of six) 06-26-23	Clear Photo Three
		Pho	to Four	
Photo Four Caption:				Clear Photo Four



Most Widely Accepted and Trusted

ICC-ES Evaluation Report

Reissued 02/2023
This report is subject to renewal 02/2025.

ESR-2074

ICC-ES | (800) 423-6587 | (562) 699-0543 | www.icc-es.org

DIVISION: 08 00 00—OPENINGS

SECTION: 08 95 43—VENTS/FOUNDATION FLOOD VENTS

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526



"2014 Recipient of Prestigious Western States Seismic Policy Council (WSSPC) Award in Excellence"

A Subsidiary of INTERNATIONAL CODE COUNCIL

ANSI National Accreditation Board
A C C R E D I T E D

STORIGHTON
PRODUCT CENTIFICATION

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.











Reissued February 2023

- I-Codes provide recognition in all 50 states
- Specialty code recognition

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

ICC-ES Evaluation Report ESR-2074

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 *International Building Code*® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code[®] (IRC)
- 2021 and 2018 International Energy Conservation Code[®] (IECC)
- 2013 Abu Dhabi International Building Code (ADIBC)†

[†]The ADIBC is based on the 2009 IBC. 2009 IBC code sections referenced in this report are the same sections in the ADIBC.

Properties evaluated:

- Physical operation
- Water flow

2.0 USES

The Smart Vent® units are engineered mechanically operated flood vents (FVs) employed to equalize hydrostatic pressure on walls of enclosures subject to rising or falling flood waters. Certain models also allow natural ventilation.

3.0 DESCRIPTION

3.1 General:

When subjected to rising water, the Smart Vent® FVs internal floats are activated, then pivot open to allow flow in either direction to equalize water level and hydrostatic pressure from one side of the foundation to the other. The FV pivoting door is normally held in the closed position by a buoyant release device. When subjected to rising water, the buoyant release device causes the unit to unlatch, allowing

This report is subject to renewal February 2025.

the door to rotate out of the way and allow flow. The water level stabilizes, equalizing the lateral forces. Each unit is fabricated from stainless steel. Smart Vent® Automatic Foundation Flood Vents are available in various models and sizes as described in Table 1. The SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 units each contain two vertically arranged openings per unit.

3.2 Engineered Opening:

The FVs comply with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/SEI 24, Smart Vent FVs must be installed in accordance with Section 4.0.

3.3 Ventilation:

The SmartVENT® Model #1540-510 and SmartVENT® Overhead Door Model #1540-514 both have screen covers with ¹/₄-inch-by-¹/₄-inch (6.35 by 6.35 mm) openings, yielding 51 square inches (32 903 mm²) of net free area to supply natural ventilation. The SmartVENT® Stacking Model #1540-511 consists of two Model #1540-510 units in one assembly, and provides 102 square inches (65 806 mm²) of net free area to supply natural ventilation. Other FVs described in this report do not offer natural ventilation

3.4 Flood Vent Sealing Kit:

The Flood Vent Sealing Kit Model #1540-526 is used with SmartVENT® Model #1540-520. It is a Homasote 440 Sound Barrier® (ESR-1374) insert with 21 – 2-inch-by-2-inch (51 mm x 51 mm) squares cut in it. See Figure 4.

4.0 DESIGN AND INSTALLATION

4.1 SmartVENT® and FloodVENT®:

SmartVENT® and FloodVENT® are designed to be installed into walls or overhead doors of existing or new construction from the exterior side. Installation of the vents must be in accordance with the manufacturer's instructions, the applicable code and this report. Installation clips allow mounting in masonry and concrete walls of any thickness. In order to comply with the engineered opening design principle noted in Section 2.7.2.2 and 2.7.3 of ASCE/SEI 24-14 [Section 2.6.2.2 of ASCE/SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Smart Vent® FVs must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 200 square feet (18.6 m²) of enclosed area, except that the SmartVENT® Stacking Model #1540-511 and FloodVENT® Stacking Model #1540-521 must be installed with a minimum of one FV for every 400 square feet (37.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the FV located a maximum of 12 inches (305.4 mm) above the higher of the final grade or floor and finished exterior grade immediately under each opening.

4.2 Flood Vent Sealing Kit

The Flood Vent Sealing Kit Model 1540-526 is used in conjunction with FloodVENT® Model #1540-520. When installed and tested in accordance with ASTM E283, the FV and Flood Vent Sealing Kit assembly have an air leakage rate of less than 0.2 cubic feet per minute per lineal foot (18.56 l/min per lineal meter) at a pressure differential of 1 pound per square foot (50 Pa) based on 12.58 lineal feet (3.8 lineal meters) contained by the Flood Vent Sealing Kit.

5.0 CONDITIONS OF USE

The Smart Vent® FVs described in this report comply with, or are suitable alternatives to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

5.1 The Smart Vent® FVs must be installed in accordance with this report, the applicable code and the

- manufacturer's installation instructions. In the event of a conflict, the instructions in this report govern.
- 5.2 The Smart Vent® FVs must not be used in the place of "breakaway walls" in coastal high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

6.0 EVIDENCE SUBMITTED

- 6.1 Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).
- 6.2 Test report on air infiltration in accordance with ASTM E283.

7.0 IDENTIFICATION

- 7.1 The Smart VENT® models and the Flood Vent Sealing Kit described in this report must be identified by a label bearing the manufacturer's name (Smartvent Products, Inc.), the model number, and the evaluation report number (ESR-2074).
- 7.2 The report holder's contact information is the following:

SMART VENT PRODUCTS, INC. 19 MANTUA ROAD MOUNT ROYAL, NEW JERSEY 08061 (877) 441-8368

www.smartvent.com info@smartvent.com

TARI	F 1	IM	IOD	ΕI	SIZES

MODEL NAME	MODEL NUMBER	MODEL SIZE (in.)	COVERAGE (sq. ft.)
FloodVENT®	1540-520	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT®	1540-510	15 ³ / ₄ " X 7 ³ / ₄ "	200
FloodVENT® Overhead Door	1540-524	15 ³ / ₄ " X 7 ³ / ₄ "	200
SmartVENT® Overhead Door	1540-514	15 ³ / ₄ " X 7 ³ / ₄ "	200
Wood Wall FloodVENT®	1540-570	14" X 8 ³ / ₄ "	200
Wood Wall FloodVENT® Overhead Door	1540-574	14" X 8 ³ / ₄ "	200
SmartVENT® Stacker	1540-511	16" X 16"	400
FloodVent® Stacker	1540-521	16" X 16"	400

For SI: 1 inch = 25.4 mm; 1 square foot = m²

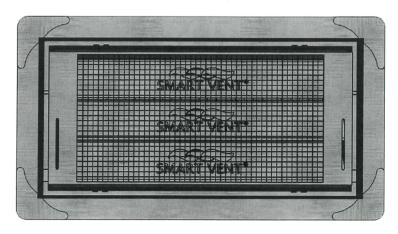


FIGURE 1—SMART VENT: MODEL 1540-510

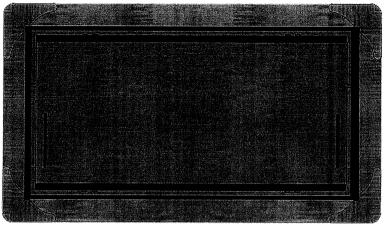


FIGURE 2—SMART VENT MODEL 1540-520

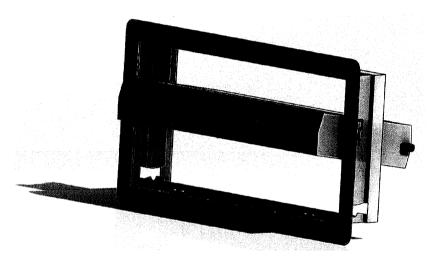


FIGURE 3—SMART VENT: SHOWN WITH FLOOD DOOR PIVOTED OPEN

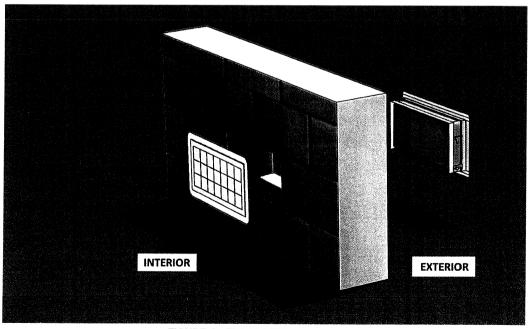


FIGURE 4—FLOOD VENT SEALING KIT



ICC-ES Evaluation Report

ESR-2074 CBC and CRC Supplement

Reissued February 2023

This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS. INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514 FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Health Planning and Development (OSHPD) AKA: California Department of Health Care Access and Information (HCAI) and the Division of State Architect (DSA). see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2,0 through 7,0 of the evaluation report ESR-2074. comply with 2019 CBC Chapter 12, provided the design and installation are in accordance with the 2018 International Building Code® (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16 as

2.1.1 OSHPD:

The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.

The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued February 2023.





ICC-ES Evaluation Report

ESR-2074 FBC Supplement

Reissued February 2023
This report is subject to renewal February 2025.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents/Foundation Flood Vents

REPORT HOLDER:

SMART VENT PRODUCTS, INC.

EVALUATION SUBJECT:

SMART VENT® AUTOMATIC FOUNDATION FLOOD VENTS: MODELS #1540-520; #1540-521; #1540-510; #1540-511; #1540-570; #1540-574; #1540-524; #1540-514
FLOOD VENT SEALING KIT #1540-526

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Smart Vent® Automatic Foundation Flood Vents, described in ICC-ES evaluation report ESR-2074, have also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Smart Vent® Automatic Foundation Flood Vents, described in Sections 2.0 through 7.0 of the evaluation report ESR-2074, comply with the *Florida Building Code—Building* and the *Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-2074 for 2018 *International Building Code®* meet the requirements of the *Florida Building Code—Building* or the *Florida Building Code—Residential*, as applicable.

Use of the Smart Vent® Automatic Foundation Flood Vents has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued February 2023.

